



1 x 9290030115 2200-2700K 10.5W

1 x 1521 lm


Polar intensity diagram



Quantity estimation diagram

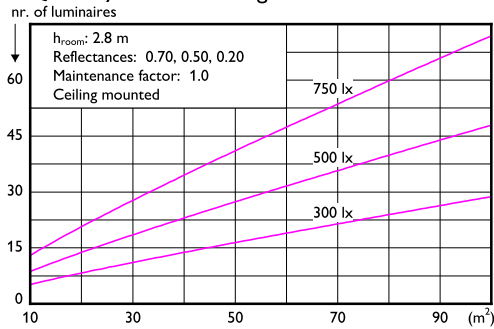

UGR diagram

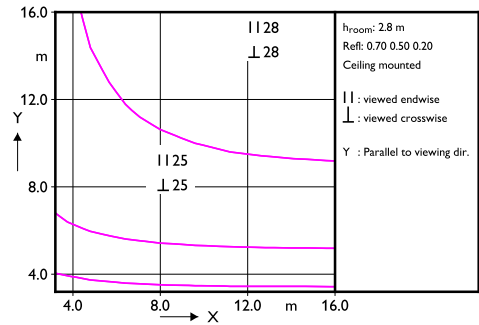

Light output ratio 1.01
Service upward 0.45
Service downward 0.56

CIE flux code 22 47 74 55 101

UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.35	0.33	0.32	0.31	0.31	0.23	0.20	0.15	0.16	0.13	0.08	0.08
1.00	0.44	0.41	0.40	0.39	0.38	0.30	0.26	0.21	0.21	0.17	0.11	0.11
1.25	0.51	0.47	0.47	0.45	0.44	0.36	0.31	0.25	0.25	0.21	0.14	0.14
1.50	0.59	0.54	0.54	0.52	0.50	0.42	0.36	0.31	0.30	0.26	0.17	0.17
2.00	0.65	0.59	0.59	0.57	0.54	0.47	0.40	0.35	0.33	0.29	0.20	0.20
2.50	0.74	0.66	0.67	0.64	0.61	0.54	0.46	0.42	0.39	0.35	0.24	0.24
3.00	0.80	0.71	0.73	0.69	0.66	0.59	0.51	0.47	0.43	0.39	0.28	0.28
4.00	0.85	0.74	0.78	0.73	0.69	0.63	0.54	0.50	0.46	0.43	0.31	0.31
5.00	0.92	0.79	0.84	0.78	0.74	0.69	0.59	0.56	0.50	0.47	0.34	0.34
6.00	0.96	0.82	0.88	0.82	0.77	0.72	0.63	0.59	0.53	0.51	0.37	0.37

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10218	9459	9037	8901	9037	9459	10218
50.0	10764	9880	9394	9240	9394	9880	10764
55.0	11415	10383	9824	9647	9824	10383	11415
60.0	12193	10983	10338	10135	10338	10983	12193
65.0	13115	11687	10938	10704	10938	11687	13115
70.0	14204	12506	11632	11361	11632	12506	14204
75.0	15524	13480	12450	12133	12450	13480	15524
80.0	17144	14645	13416	13043	13416	14645	17144
85.0	19233	16106	14612	14164	14612	16106	19233
90.0	21963	17933	16078	15530	16078	17933	21963

(cd/m²)

2021-07-01