



1 x 9290030111 2200-2700K 7.2W

1 x 1055 lm


Polar intensity diagram



Quantity estimation diagram

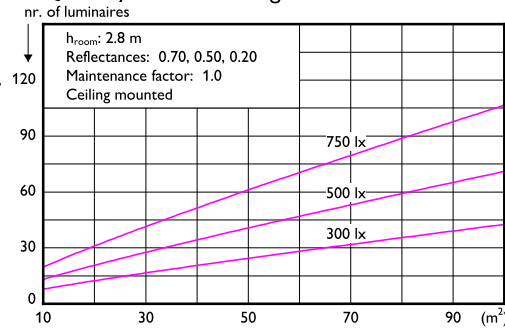

UGR diagram

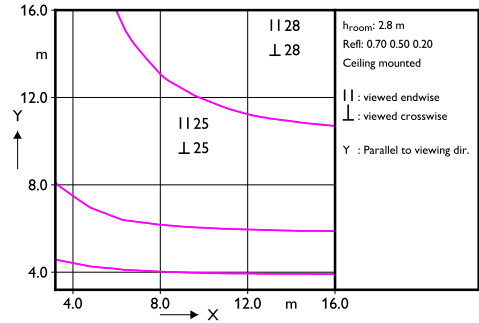

Light output ratio 1.01
Service upward 0.46
Service downward 0.55

CIE flux code 17 42 70 54 101

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)															
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.80	0.80	0.70	0.70	0.70
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.30	0.10	0.30	0.20	0.10
0.80	0.42	0.39	0.38	0.37	0.36	0.28	0.24	0.19	0.19	0.15	0.08	0.42	0.39	0.38	0.37	0.36
1.00	0.49	0.46	0.45	0.44	0.42	0.34	0.28	0.23	0.23	0.19	0.11	0.49	0.46	0.45	0.44	0.42
1.25	0.57	0.52	0.52	0.50	0.48	0.40	0.34	0.28	0.27	0.23	0.14	0.57	0.52	0.52	0.50	0.48
1.50	0.63	0.57	0.57	0.55	0.52	0.45	0.38	0.32	0.31	0.27	0.17	0.63	0.57	0.57	0.55	0.52
2.00	0.72	0.64	0.65	0.62	0.59	0.52	0.44	0.39	0.36	0.32	0.21	0.72	0.64	0.65	0.62	0.59
2.50	0.78	0.69	0.71	0.67	0.64	0.57	0.49	0.44	0.41	0.37	0.25	0.78	0.69	0.71	0.67	0.64
3.00	0.83	0.73	0.76	0.71	0.67	0.61	0.52	0.48	0.44	0.40	0.28	0.83	0.73	0.76	0.71	0.67
4.00	0.90	0.78	0.82	0.77	0.72	0.67	0.57	0.53	0.48	0.45	0.32	0.90	0.78	0.82	0.77	0.72
5.00	0.94	0.81	0.86	0.80	0.75	0.71	0.61	0.57	0.51	0.48	0.34	0.94	0.81	0.86	0.80	0.75

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	6981	6450	6156	6062	6156	6450	6981
50.0	7636	6995	6645	6533	6645	6995	7636
55.0	8316	7549	7136	7005	7136	7549	8316
60.0	9071	8155	7668	7515	7668	8155	9071
65.0	9946	8846	8272	8092	8272	8846	9946
70.0	10984	9653	8970	8759	8970	9653	10984
75.0	12317	10678	9854	9601	9854	10678	12317
80.0	13722	11707	10717	10417	10717	11707	13722
85.0	15423	12905	11704	11343	11704	12905	15423
90.0	17637	14401	12911	12472	12911	14401	17637

(cd/m²)

2021-07-01