



1 x 9290029885 5.5W 2700K

1 x 500 lm


Polar intensity diagram



Quantity estimation diagram

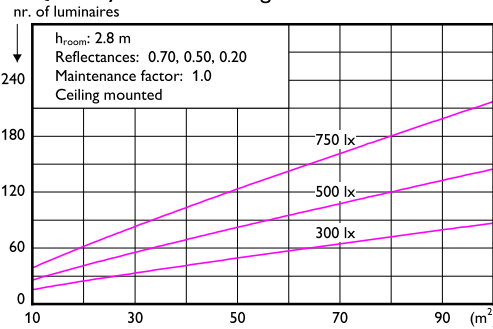

UGR diagram

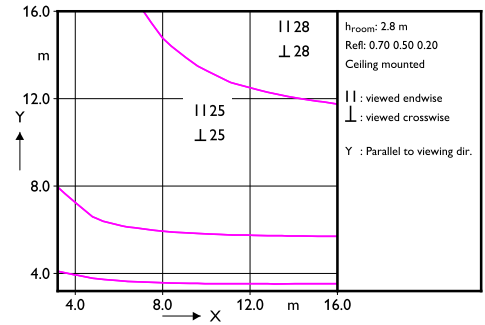

Light output ratio 1.00
Service upward 0.47
Service downward 0.53

CIE flux code 26 52 77 53 100

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.36	0.34	0.33	0.32	0.31	0.24	0.21	0.16	0.17	0.14	0.09	0.09
0.80	0.45	0.42	0.41	0.40	0.39	0.31	0.27	0.22	0.22	0.18	0.12	0.12
1.00	0.52	0.48	0.48	0.46	0.45	0.37	0.32	0.27	0.26	0.23	0.15	0.15
1.25	0.60	0.55	0.55	0.52	0.51	0.43	0.37	0.32	0.31	0.27	0.18	0.18
1.50	0.65	0.59	0.60	0.57	0.55	0.48	0.41	0.36	0.34	0.30	0.21	0.21
2.00	0.74	0.66	0.68	0.65	0.62	0.55	0.47	0.43	0.40	0.36	0.25	0.25
2.50	0.81	0.71	0.74	0.70	0.66	0.60	0.52	0.48	0.43	0.40	0.28	0.28
3.00	0.85	0.75	0.78	0.73	0.69	0.64	0.55	0.51	0.46	0.43	0.31	0.31
4.00	0.92	0.79	0.84	0.78	0.74	0.69	0.60	0.56	0.50	0.48	0.34	0.34
5.00	0.96	0.82	0.88	0.82	0.77	0.73	0.63	0.60	0.53	0.51	0.37	0.37

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	11623	10813	10359	10213	10359	10813	11623
50.0	11858	10940	10432	10270	10432	10940	11858
55.0	11714	10711	10164	9990	10164	10711	11714
60.0	12814	11604	10953	10748	10953	11604	12814
65.0	13623	12204	11454	11218	11454	12204	13623
70.0	13912	12311	11480	11222	11480	12311	13912
75.0	14264	12443	11519	11234	11519	12443	14264
80.0	15393	13200	12115	11785	12115	13200	15393
85.0	18558	15578	14150	13721	14150	15578	18558
90.0	22567	18426	16520	15957	16520	18426	22567

(cd/m²)

2021-07-28