



1 x 9290030825 5W

1 x 500 lm


Polar intensity diagram



Quantity estimation diagram

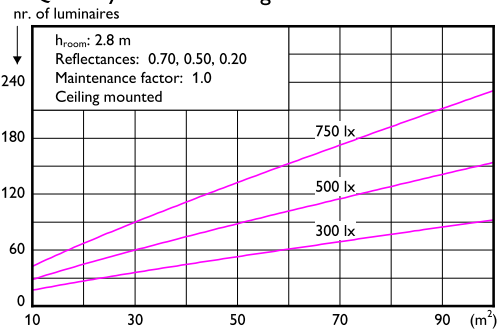

UGR diagram

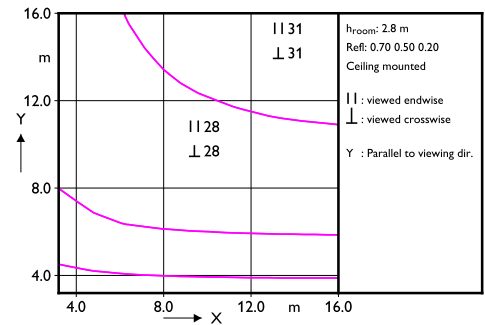

Light output ratio 1.00
Service upward 0.50
Service downward 0.50

CIE flux code 15 39 68 50 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80 0.80				0.70 0.70				0.50 0.50			
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.30	0.00
0.60	0.32	0.31	0.29	0.29	0.28	0.21	0.17	0.13	0.13	0.10	0.04	0.00
0.80	0.41	0.39	0.37	0.36	0.35	0.27	0.22	0.18	0.18	0.14	0.07	0.00
1.00	0.48	0.45	0.44	0.42	0.41	0.33	0.27	0.22	0.22	0.17	0.09	0.00
1.25	0.55	0.51	0.50	0.48	0.47	0.39	0.32	0.27	0.26	0.21	0.12	0.00
1.50	0.61	0.56	0.56	0.53	0.51	0.43	0.36	0.31	0.29	0.25	0.15	0.00
2.00	0.70	0.63	0.64	0.60	0.58	0.50	0.42	0.37	0.34	0.30	0.19	0.00
2.50	0.77	0.68	0.69	0.66	0.62	0.56	0.47	0.42	0.38	0.34	0.22	0.00
3.00	0.81	0.71	0.74	0.69	0.66	0.60	0.50	0.46	0.41	0.37	0.24	0.00
4.00	0.88	0.76	0.80	0.75	0.70	0.65	0.55	0.51	0.45	0.42	0.28	0.00
5.00	0.93	0.79	0.84	0.78	0.73	0.69	0.58	0.55	0.48	0.45	0.31	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	19329	17304	16235	15900	16235	17304	19329
50.0	21116	18740	17502	17116	17502	18740	21116
55.0	22956	20197	18778	18338	18778	20197	22956
60.0	24843	21664	20051	19555	20051	21664	24843
65.0	26801	23159	21337	20779	21337	23159	26801
70.0	28824	24671	22622	21999	22622	24671	28824
75.0	30985	26253	23953	23258	23953	26253	30985
80.0	33287	27894	25316	24542	25316	27894	33287
85.0	35859	29685	26786	25923	26786	29685	35859
90.0	38782	31665	28390	27423	28390	31665	38782

(cd/m²)

2021-09-10