



1 x 9290020108 26W 6500K

1 x 2050 lm


Polar intensity diagram



Quantity estimation diagram

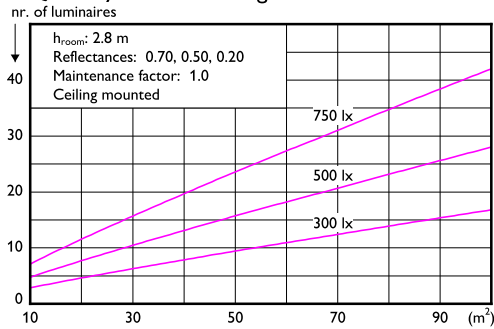

UGR diagram

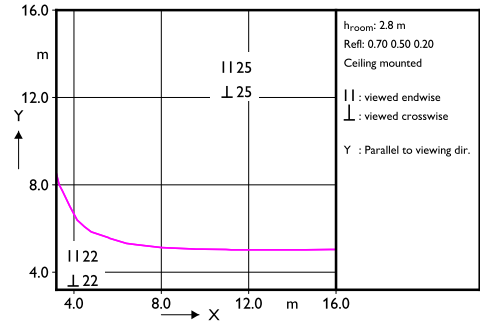

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10973	10311	9934	9812	9934	10311	10973
50.0	10381	9679	9284	9157	9284	9679	10381
55.0	9735	8999	8591	8461	8591	8999	9735
60.0	9003	8245	7830	7698	7830	8245	9003
65.0	8167	7399	6986	6856	6986	7399	8167
70.0	7198	6440	6040	5915	6040	6440	7198
75.0	6087	5365	4992	4877	4992	5365	6087
80.0	4858	4202	3874	3773	3874	4202	4858
85.0	3656	3086	2811	2728	2811	3086	3656
90.0	2898	2366	2122	2049	2122	2366	2898

(cd/m²)

Light output ratio 1.00
Service upward 0.05
Service downward 0.95

CIE flux code 43 74 93 95 100

UGRcen (4Hx8H, 0.25H) 24

2019-07-05