



1 x 9290020107 3000K 26W

1 x 1950 lm


Polar intensity diagram



Quantity estimation diagram

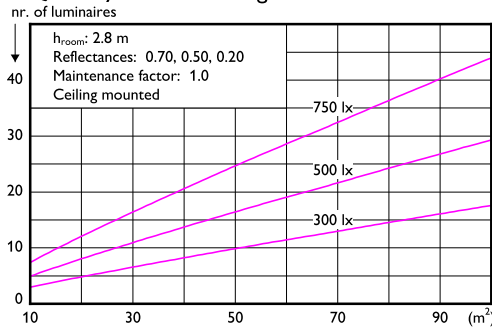

UGR diagram

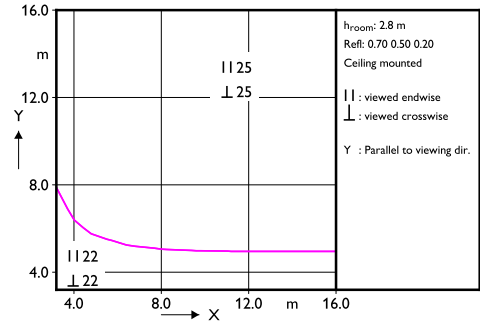

Light output ratio 1.01
Service upward 0.05
Service downward 0.96

CIE flux code 43 73 92 95 101

UGRcen (4Hx8H, 0.25H) 24

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
0.80	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
1.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
1.25	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
1.50	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
2.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
2.50	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
3.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
4.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
5.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10549	9929	9575	9460	9575	9929	10549
50.0	10041	9379	9005	8884	9005	9379	10041
55.0	9482	8782	8392	8267	8392	8782	9482
60.0	8847	8117	7717	7589	7717	8117	8847
65.0	8118	7369	6965	6837	6965	7369	8118
70.0	7259	6508	6110	5985	6110	6508	7259
75.0	6274	5540	5160	5042	5160	5540	6274
80.0	5169	4478	4132	4025	4132	4478	5169
85.0	4031	3407	3105	3014	3105	3407	4031
90.0	3133	2558	2294	2216	2294	2558	3133

(cd/m²)

2020-08-28