



1 x 9290038011 2.3W 2700K

1 x 485 lm


Polar intensity diagram



Quantity estimation diagram

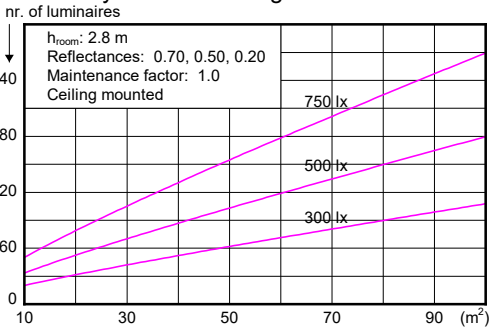

UGR diagram

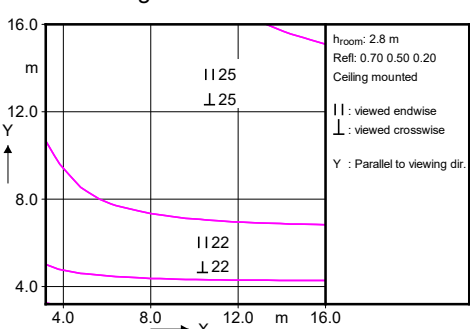

Light output ratio 0.89
Service upward 0.46
Service downward 0.43
CIE flux code 13 38 68 48 89
UGRcen (4Hx8H, 0.25H) 24

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.25	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
3.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
4.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
5.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	7535	6587	6105	5956	6105	6587	7535
50.0	8060	6993	6455	6290	6455	6993	8060
55.0	8549	7362	6771	6590	6771	7362	8549
60.0	9058	7744	7097	6900	7097	7744	9058
65.0	9518	8079	7378	7166	7378	8079	9518
70.0	9957	8392	7637	7410	7637	8392	9957
75.0	10396	8698	7887	7645	7887	8698	10396
80.0	10891	9042	8170	7910	8170	9042	10891
85.0	11444	9425	8484	8205	8484	9425	11444
90.0	12075	9859	8840	8538	8840	9859	12075

(cd/m²)