



1 x 9290030852 3.5W

1 x 350 lm


Polar intensity diagram



Quantity estimation diagram

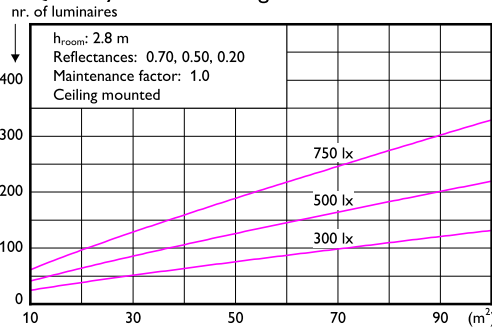

UGR diagram

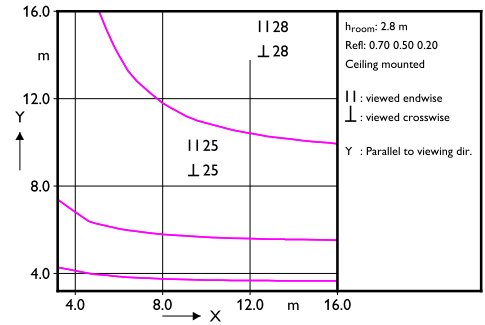

Light output ratio 1.00
Service upward 0.50
Service downward 0.50

CIE flux code 14 40 69 50 100

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.32	0.30	0.29	0.28	0.28	0.20	0.16	0.12	0.13	0.09	0.04	0.00
0.80	0.41	0.38	0.37	0.36	0.35	0.27	0.22	0.17	0.17	0.13	0.07	0.00
1.00	0.48	0.45	0.44	0.42	0.41	0.33	0.27	0.22	0.21	0.17	0.09	0.00
1.25	0.55	0.51	0.50	0.48	0.47	0.39	0.32	0.27	0.25	0.21	0.12	0.00
1.50	0.61	0.56	0.56	0.53	0.51	0.43	0.36	0.31	0.29	0.25	0.15	0.00
2.00	0.70	0.63	0.64	0.61	0.58	0.51	0.42	0.37	0.34	0.30	0.19	0.00
2.50	0.77	0.68	0.70	0.66	0.62	0.56	0.47	0.42	0.38	0.34	0.22	0.00
3.00	0.82	0.71	0.74	0.70	0.66	0.60	0.50	0.46	0.41	0.38	0.25	0.00
4.00	0.88	0.76	0.80	0.75	0.70	0.65	0.55	0.51	0.45	0.42	0.28	0.00
5.00	0.93	0.80	0.84	0.78	0.74	0.69	0.58	0.55	0.48	0.45	0.31	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	9079	8259	7815	7674	7815	8259	9079
50.0	10010	9025	8499	8334	8499	9025	10010
55.0	10804	9653	9047	8857	9047	9653	10804
60.0	11539	10212	9523	9309	9523	10212	11539
65.0	12369	10836	10053	9811	10053	10836	12369
70.0	13269	11499	10609	10336	10609	11499	13269
75.0	14431	12356	11332	11020	11332	12356	14431
80.0	15771	13323	12138	11781	12138	13323	15771
85.0	17340	14421	13042	12629	13042	14421	17340
90.0	19326	15779	14147	13665	14147	15779	19326

(cd/m²)

2021-11-05