



1 x 9290029725 7W 2700K

1 x 806 lm


Polar intensity diagram



Quantity estimation diagram

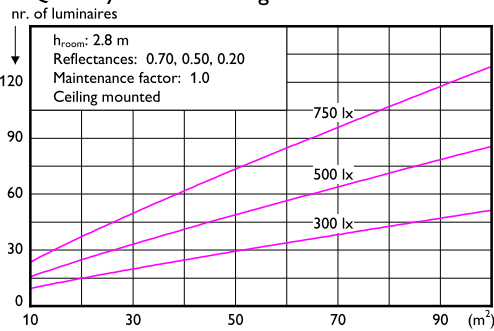

UGR diagram

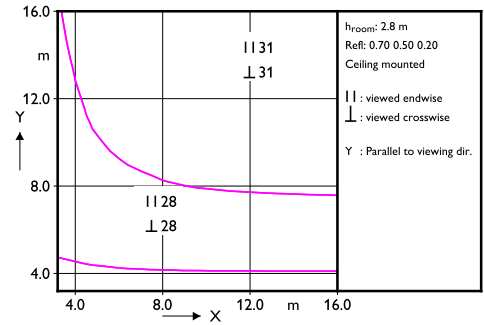

Light output ratio 1.00
Service upward 0.28
Service downward 0.72

CIE flux code 25 54 79 72 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.35	0.33	0.33	0.32	0.32	0.24	0.21	0.16	0.19	0.15	0.11	0.11
0.80	0.45	0.42	0.42	0.41	0.40	0.31	0.28	0.23	0.25	0.21	0.16	0.16
1.00	0.52	0.49	0.49	0.48	0.46	0.38	0.34	0.28	0.30	0.26	0.20	0.20
1.25	0.60	0.55	0.57	0.54	0.52	0.44	0.40	0.34	0.36	0.31	0.25	0.25
1.50	0.66	0.60	0.62	0.60	0.57	0.49	0.45	0.39	0.40	0.35	0.29	0.29
2.00	0.76	0.68	0.71	0.68	0.64	0.57	0.52	0.47	0.47	0.43	0.35	0.35
2.50	0.83	0.73	0.77	0.73	0.69	0.63	0.57	0.52	0.52	0.48	0.39	0.39
3.00	0.88	0.77	0.82	0.77	0.73	0.67	0.61	0.56	0.55	0.51	0.43	0.43
4.00	0.94	0.82	0.88	0.83	0.78	0.73	0.66	0.62	0.60	0.57	0.48	0.48
5.00	0.99	0.85	0.92	0.86	0.81	0.76	0.70	0.66	0.63	0.60	0.51	0.51

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	40307	35404	32889	32111	32889	35404	40307
50.0	39558	34470	31892	31098	31892	34470	39558
55.0	38576	33356	30741	29941	30741	33356	38576
60.0	37415	32108	29479	28678	29479	32108	37415
65.0	36136	30776	28151	27355	28151	30776	36136
70.0	34715	29340	26737	25952	26737	29340	34715
75.0	33350	27964	25387	24613	25387	27964	33350
80.0	32026	26633	24083	23322	24083	26633	32026
85.0	30687	25296	22780	22033	22780	25296	30687
90.0	29582	24154	21656	20918	21656	24154	29582

(cd/m²)

2021-05-12