



1 x 9290030119 2200-2700K 2.5W

1 x 340 lm


Polar intensity diagram



Quantity estimation diagram

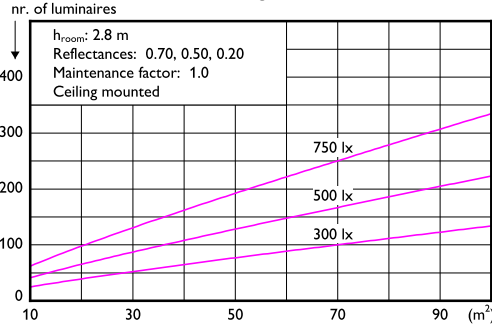

UGR diagram

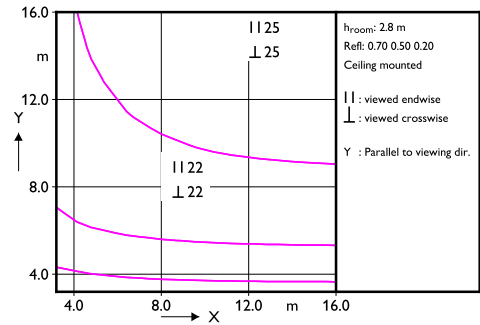

Light output ratio 1.01
Service upward 0.48
Service downward 0.53

CIE flux code 15 39 69 52 101

UGRcen (4Hx8H, 0.25H) 23

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.41	0.39	0.38	0.37	0.36	0.28	0.23	0.18	0.18	0.14	0.07	0.05
1.00	0.49	0.45	0.44	0.43	0.41	0.33	0.28	0.22	0.22	0.18	0.10	0.07
1.25	0.56	0.51	0.51	0.49	0.47	0.39	0.32	0.27	0.26	0.22	0.13	0.10
1.50	0.62	0.56	0.56	0.54	0.52	0.44	0.37	0.31	0.30	0.25	0.15	0.10
2.00	0.71	0.63	0.65	0.61	0.58	0.51	0.43	0.38	0.35	0.31	0.20	0.15
2.50	0.78	0.68	0.70	0.67	0.63	0.56	0.48	0.43	0.39	0.35	0.23	0.15
3.00	0.82	0.72	0.75	0.71	0.67	0.61	0.51	0.47	0.42	0.39	0.26	0.15
4.00	0.89	0.77	0.81	0.76	0.72	0.66	0.56	0.52	0.47	0.44	0.30	0.15
5.00	0.94	0.81	0.85	0.80	0.75	0.70	0.60	0.56	0.50	0.47	0.33	0.15

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	2811	2652	2562	2532	2562	2652	2811
50.0	3227	3023	2907	2869	2907	3023	3227
55.0	3697	3434	3287	3240	3287	3434	3697
60.0	4211	3876	3691	3632	3691	3876	4211
65.0	4804	4375	4142	4069	4142	4375	4804
70.0	5438	4891	4600	4508	4600	4891	5438
75.0	6209	5500	5132	5017	5132	5500	6209
80.0	7152	6213	5740	5595	5740	6213	7152
85.0	8461	7165	6536	6346	6536	7165	8461
90.0	10409	8499	7620	7360	7620	8499	10409

(cd/m²)

2021-07-01