



1 x 9290030125 2200-2700K 3.4W

1 x 470 lm


Polar intensity diagram



Quantity estimation diagram

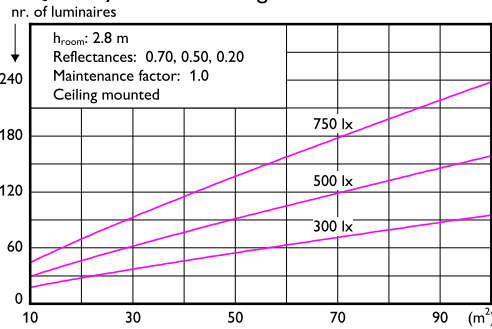

UGR diagram

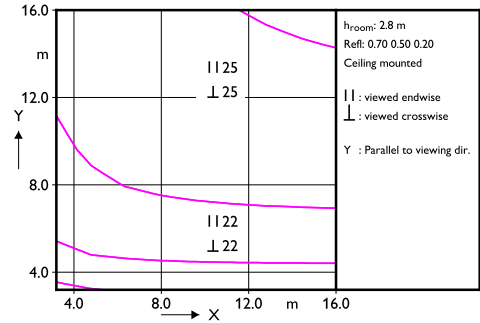

Light output ratio 1.01
Service upward 0.45
Service downward 0.56

CIE flux code 17 42 71 55 101

UGRcen (4Hx8H, 0.25H) 24

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.42	0.39	0.38	0.37	0.36	0.28	0.24	0.19	0.19	0.15	0.09	0.06
1.00	0.49	0.46	0.45	0.44	0.42	0.34	0.29	0.23	0.23	0.19	0.11	0.09
1.25	0.57	0.52	0.52	0.50	0.48	0.40	0.34	0.28	0.28	0.23	0.15	0.11
1.50	0.63	0.57	0.57	0.55	0.53	0.45	0.38	0.33	0.31	0.27	0.17	0.11
2.00	0.72	0.64	0.66	0.62	0.59	0.52	0.44	0.39	0.37	0.33	0.22	0.15
2.50	0.78	0.69	0.72	0.68	0.64	0.58	0.49	0.44	0.41	0.37	0.26	0.17
3.00	0.83	0.73	0.76	0.72	0.68	0.62	0.53	0.48	0.44	0.41	0.28	0.17
4.00	0.90	0.78	0.82	0.77	0.73	0.67	0.58	0.54	0.49	0.46	0.33	0.22
5.00	0.95	0.81	0.86	0.81	0.76	0.71	0.61	0.58	0.52	0.49	0.35	0.22

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	4445	4193	4049	4002	4049	4193	4445
50.0	4992	4674	4494	4436	4494	4674	4992
55.0	5550	5153	4932	4861	4932	5153	5550
60.0	6166	5672	5400	5314	5400	5672	6166
65.0	6895	6276	5941	5835	5941	6276	6895
70.0	7746	6963	6547	6416	6547	6963	7746
75.0	8756	7752	7231	7068	7231	7752	8756
80.0	10039	8719	8053	7848	8053	8719	10039
85.0	11786	9977	9100	8835	9100	9977	11786
90.0	14421	11774	10557	10197	10557	11774	14421

(cd/m²)

2021-07-01