



1 x 9290024951 4000K 7.2W

1 x 850 lm


Polar intensity diagram



Quantity estimation diagram

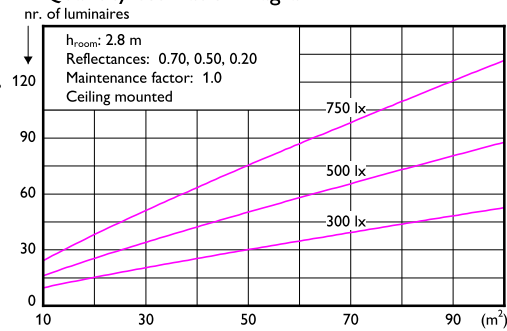

UGR diagram

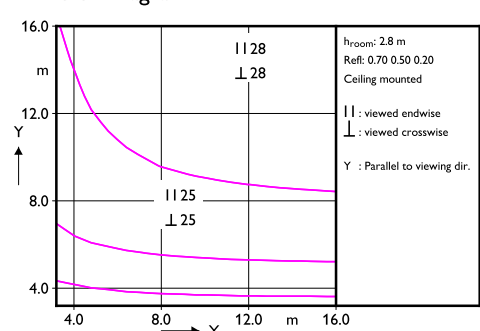

Light output ratio 1.01
Service upward 0.47
Service downward 0.54

CIE flux code 18 43 71 53 101

UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.33	0.32	0.31	0.30	0.29	0.22	0.18	0.14	0.15	0.11	0.06	0.06
1.00	0.42	0.40	0.39	0.38	0.37	0.29	0.24	0.19	0.19	0.15	0.09	0.09
1.25	0.50	0.46	0.45	0.44	0.42	0.34	0.29	0.24	0.23	0.19	0.11	0.11
1.50	0.57	0.52	0.52	0.50	0.48	0.40	0.34	0.29	0.28	0.23	0.15	0.15
1.75	0.63	0.57	0.58	0.55	0.53	0.45	0.38	0.33	0.31	0.27	0.17	0.17
2.00	0.72	0.64	0.66	0.62	0.60	0.52	0.44	0.39	0.37	0.33	0.22	0.22
2.50	0.79	0.69	0.72	0.68	0.64	0.58	0.49	0.44	0.41	0.37	0.25	0.25
3.00	0.83	0.73	0.76	0.72	0.68	0.62	0.52	0.48	0.44	0.40	0.28	0.28
4.00	0.90	0.78	0.82	0.77	0.72	0.67	0.57	0.54	0.48	0.45	0.32	0.32
5.00	0.95	0.81	0.86	0.80	0.76	0.71	0.61	0.57	0.51	0.48	0.34	0.34

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	6331	6174	6080	6048	6080	6174	6331
50.0	7199	6992	6868	6827	6868	6992	7199
55.0	8201	7927	7764	7710	7764	7927	8201
60.0	9409	9042	8826	8755	8826	9042	9409
65.0	10920	10419	10126	10030	10126	10419	10920
70.0	12900	12190	11783	11650	11783	12190	12900
75.0	15776	14712	14114	13920	14114	14712	15776
80.0	20217	18478	17529	17228	17529	18478	20217
85.0	28233	24916	23203	22671	23203	24916	28233
90.0	47255	38584	34593	33415	34593	38584	47255

(cd/m²)

2021-06-10