


1 x TLED 32W 6500K 9290036049

1 x 3600 lm

Polar intensity diagram

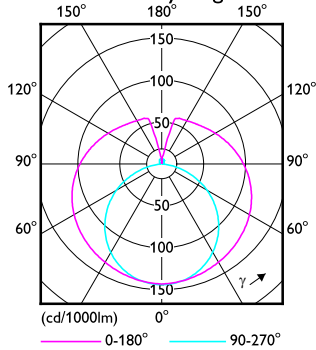


Light output ratio 0.90
Service upward 0.30
Service downward 0.60

CIE flux code 34 61 83 67 90

UGRcen (4Hx8H, 0.25H) 23

Quantity estimation diagram

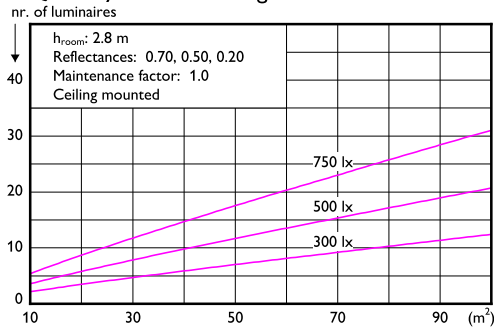


Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

UGR diagram

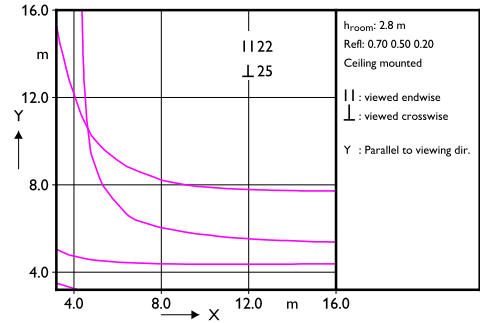

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	5456	5384	5496	5574	5850	6666	8007
50.0	5371	5275	5375	5390	5604	6411	7831
55.0	5316	5197	5285	5231	5370	6137	7601
60.0	5291	5148	5227	5097	5152	5842	7299
65.0	5292	5127	5199	4994	4962	5526	6893
70.0	5321	5136	5205	4927	4809	5189	6329
75.0	5383	5177	5249	4906	4710	4841	5523
80.0	5481	5257	5337	4943	4693	4524	4346
85.0	5628	5386	5484	5061	4795	4371	2608
90.0	5838	5581	5710	5291	5080	4843	1792

(cd/m²)