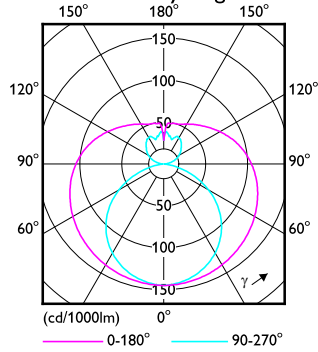


1 x TLED 24W 4000K 9290018751

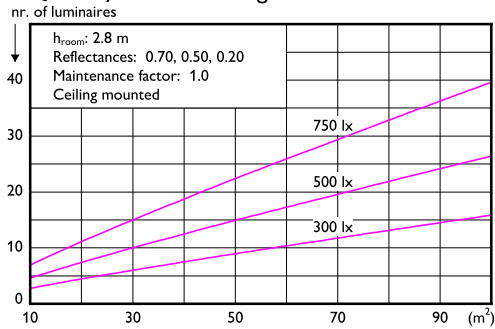
1 x 2700 lm

Polar intensity diagram

Light output ratio 0.95
 Service upward 0.33
 Service downward 0.62

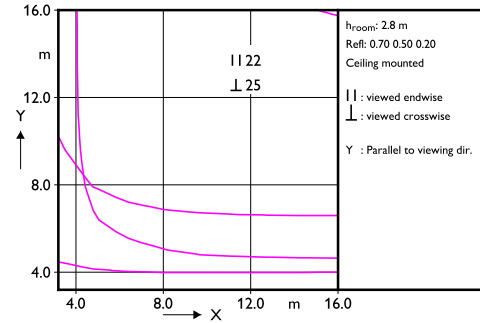
CIE flux code 33 61 82 65 95

UGRcen (4Hx8H, 0.25H) 24

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
0.80	0.50	0.50	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.36	0.35	0.34	0.33	0.33	0.26	0.23	0.19	0.21	0.17	0.13	0.13
1.25	0.45	0.43	0.43	0.41	0.40	0.33	0.30	0.25	0.26	0.22	0.17	0.17
1.50	0.53	0.49	0.49	0.48	0.46	0.39	0.35	0.30	0.31	0.27	0.21	0.21
2.00	0.60	0.55	0.56	0.54	0.52	0.45	0.40	0.36	0.36	0.32	0.25	0.25
2.50	0.66	0.60	0.61	0.59	0.56	0.50	0.44	0.40	0.39	0.36	0.28	0.28
3.00	0.74	0.66	0.69	0.66	0.63	0.57	0.51	0.47	0.45	0.42	0.33	0.33
4.00	0.80	0.71	0.75	0.71	0.67	0.62	0.55	0.51	0.49	0.46	0.37	0.37
5.00	0.85	0.74	0.79	0.74	0.70	0.65	0.58	0.55	0.52	0.49	0.40	0.40
	0.91	0.79	0.84	0.79	0.74	0.70	0.63	0.60	0.56	0.53	0.43	0.43
	0.95	0.81	0.88	0.82	0.77	0.73	0.66	0.63	0.58	0.56	0.46	0.46

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	6743	6615	6713	6825	7184	8134	9700
50.0	6651	6495	6578	6615	6901	7824	9454
55.0	6592	6411	6484	6438	6637	7481	9106
60.0	6577	6369	6433	6291	6385	7087	8602
65.0	6601	6370	6430	6187	6164	6659	7922
70.0	6671	6416	6478	6140	6004	6179	6886
75.0	6785	6513	6588	6166	5936	5691	5390
80.0	6964	6667	6754	6281	6009	5300	3278
85.0	7203	6891	7011	6523	6275	5336	869
90.0	7516	7190	7361	6914	6815	6464	2894

(cd/m²)

s22050019i

2022-05-23