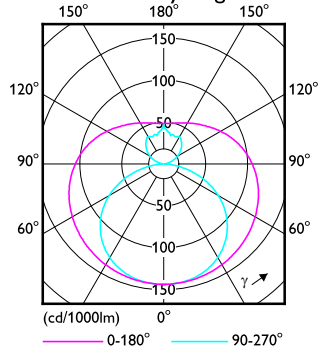


1 x TLED 24W 6500K 9290018750

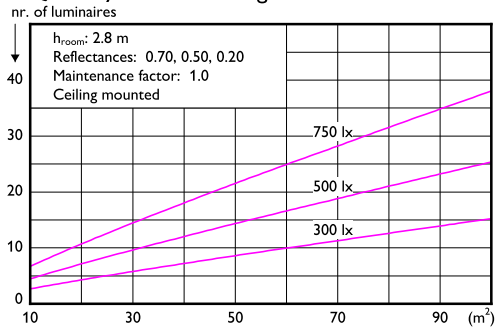
1 x 2700 lm

Polar intensity diagram

Light output ratio 0.99
 Service upward 0.34
 Service downward 0.65

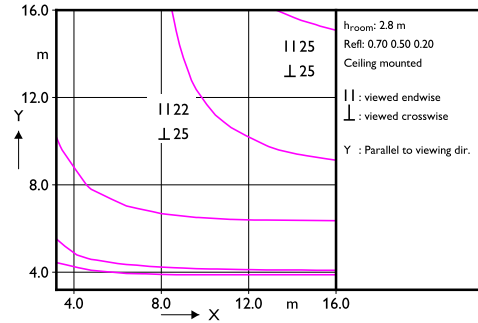
CIE flux code 32 60 82 66 99

UGRcen (4Hx8H, 0.25H) 24

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
0.80	0.50	0.50	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.38	0.36	0.35	0.35	0.34	0.26	0.24	0.19	0.21	0.17	0.13	0.13
1.50	0.47	0.44	0.44	0.43	0.42	0.34	0.30	0.26	0.27	0.23	0.18	0.18
1.75	0.55	0.51	0.51	0.49	0.48	0.40	0.36	0.31	0.32	0.28	0.22	0.22
2.00	0.62	0.57	0.58	0.56	0.54	0.46	0.42	0.37	0.37	0.33	0.26	0.26
2.50	0.68	0.62	0.64	0.61	0.58	0.51	0.46	0.41	0.41	0.37	0.29	0.29
3.00	0.77	0.69	0.72	0.69	0.65	0.59	0.53	0.48	0.47	0.43	0.35	0.35
3.50	0.84	0.74	0.78	0.74	0.70	0.64	0.58	0.53	0.51	0.48	0.39	0.39
4.00	0.88	0.77	0.82	0.77	0.73	0.68	0.61	0.57	0.54	0.51	0.42	0.42
4.50	0.95	0.82	0.88	0.82	0.78	0.73	0.66	0.62	0.59	0.56	0.46	0.46
5.00	0.99	0.85	0.92	0.86	0.80	0.77	0.69	0.66	0.61	0.59	0.48	0.48

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	6763	6738	6949	7194	7730	8861	10710
50.0	6676	6629	6834	7023	7517	8675	10697
55.0	6627	6558	6760	6879	7310	8462	10634
60.0	6620	6528	6726	6764	7117	8208	10473
65.0	6653	6538	6735	6681	6942	7911	10187
70.0	6731	6592	6791	6643	6805	7570	9707
75.0	6848	6691	6904	6666	6736	7193	8921
80.0	7024	6844	7073	6763	6773	6830	7699
85.0	7256	7064	7334	6976	6971	6607	5691
90.0	7576	7361	7673	7330	7444	7095	4302

(cd/m²)

s22050019h

2022-05-23