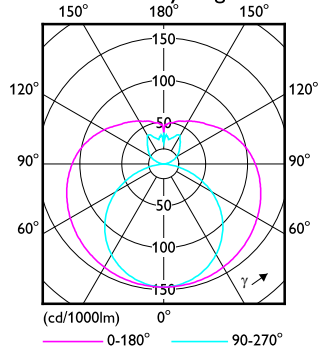


1 x TLED 18W 4000K 9290035207

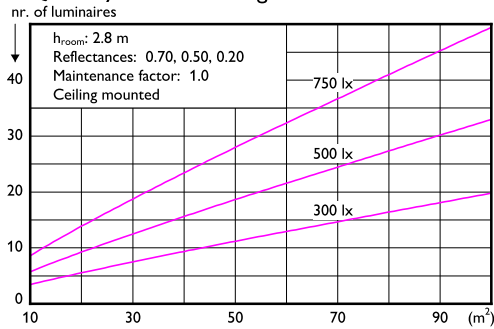
1 x 2100 lm

Polar intensity diagram

Light output ratio 0.98
 Service upward 0.34
 Service downward 0.64

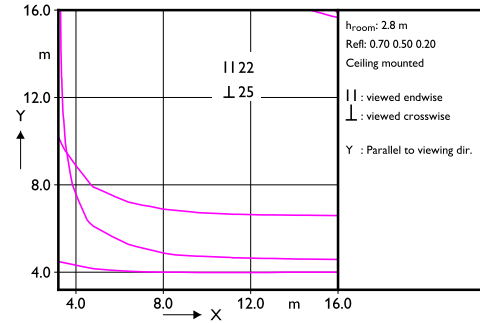
CIE flux code 33 60 82 65 98

UGRcen (4Hx8H, 0.25H) 24

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
0.60	0.38	0.36	0.35	0.35	0.34	0.27	0.24	0.20	0.21	0.18	0.14	0.00
0.80	0.47	0.44	0.44	0.43	0.41	0.34	0.30	0.26	0.27	0.23	0.18	0.00
1.00	0.54	0.50	0.51	0.49	0.48	0.40	0.36	0.31	0.32	0.28	0.22	0.00
1.25	0.62	0.57	0.58	0.56	0.53	0.46	0.41	0.36	0.37	0.33	0.26	0.00
1.50	0.68	0.61	0.63	0.60	0.58	0.51	0.46	0.41	0.40	0.37	0.29	0.00
2.00	0.77	0.68	0.71	0.68	0.65	0.58	0.52	0.48	0.46	0.43	0.34	0.00
2.50	0.83	0.73	0.77	0.73	0.69	0.63	0.57	0.53	0.50	0.47	0.38	0.00
3.00	0.87	0.77	0.81	0.77	0.72	0.67	0.60	0.57	0.54	0.51	0.41	0.00
4.00	0.94	0.81	0.87	0.82	0.77	0.72	0.65	0.62	0.58	0.55	0.45	0.00
5.00	0.98	0.84	0.91	0.85	0.80	0.76	0.68	0.65	0.60	0.58	0.47	0.00

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	6729	6600	6696	6799	7146	8076	9610
50.0	6637	6480	6562	6594	6873	7794	9420
55.0	6584	6399	6468	6421	6621	7493	9165
60.0	6581	6365	6420	6280	6376	7169	8850
65.0	6614	6368	6414	6179	6167	6800	8346
70.0	6693	6418	6459	6132	6014	6403	7611
75.0	6827	6527	6573	6175	5983	6029	6553
80.0	7015	6691	6750	6282	6018	5675	5013
85.0	7276	6931	7017	6514	6244	5564	2739
90.0	7627	7260	7390	6907	6747	6292	723

(cd/m²)

s22020017g

2022-03-30