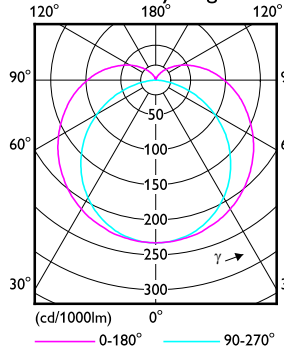


TLED T8 MasterConnect G2 1 x 929002456600

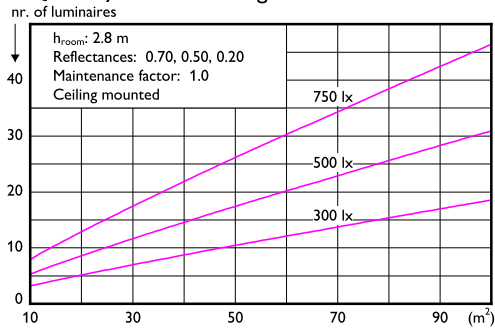
1 x 2000 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.15
 Service downward 0.85

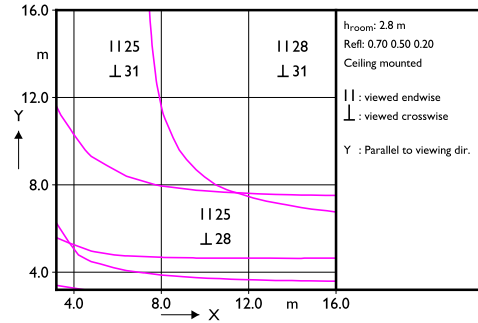
CIE flux code 38 67 87 85 100

UGRcen (4Hx8H, 0.25H) 30

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.50	0.50	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.42	0.40	0.40	0.39	0.39	0.31	0.30	0.25	0.28	0.24	0.21	0.21
1.25	0.52	0.49	0.50	0.48	0.47	0.39	0.37	0.32	0.35	0.31	0.27	0.27
1.50	0.60	0.56	0.58	0.56	0.54	0.46	0.44	0.38	0.41	0.37	0.33	0.33
2.00	0.68	0.62	0.65	0.63	0.60	0.53	0.50	0.45	0.47	0.43	0.38	0.38
2.50	0.74	0.67	0.71	0.68	0.65	0.58	0.55	0.50	0.52	0.48	0.43	0.43
3.00	0.84	0.75	0.80	0.76	0.73	0.66	0.63	0.58	0.59	0.55	0.50	0.50
4.00	0.90	0.80	0.86	0.82	0.77	0.72	0.68	0.64	0.64	0.61	0.55	0.55
5.00	0.95	0.83	0.91	0.85	0.81	0.76	0.72	0.68	0.68	0.65	0.59	0.59
	1.02	0.88	0.97	0.91	0.85	0.81	0.77	0.73	0.73	0.70	0.64	0.64
	1.06	0.91	1.01	0.94	0.88	0.84	0.80	0.77	0.76	0.73	0.67	0.67

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	15948	15421	14895	14369	13795	13221	12648
50.0	16693	16024	15355	14685	13917	13149	12381
55.0	17714	16861	16009	15158	14107	13057	12007
60.0	19087	18014	16940	15867	14420	12973	11525
65.0	21101	19724	18347	16970	14951	12931	10911
70.0	24245	22435	20625	18815	15921	13028	10136
75.0	29725	27215	24706	22198	17822	13446	9068
80.0	40702	36904	33105	29305	22010	14716	7421
85.0	73848	66240	58634	51031	35646	20261	4876
90.0	-	-	-	-	-	-	-

(cd/m²)