


1 x TLED 8W 3000K 9290024206

1 x 1000 lm

Polar intensity diagram

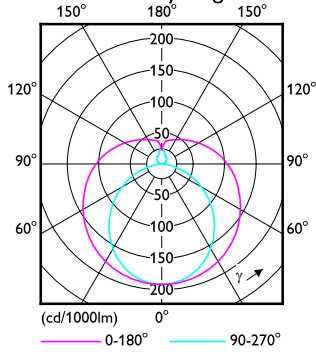


Light output ratio 1.00
Service upward 0.27
Service downward 0.73

CIE flux code 36 64 85 73 100

UGRcen (4Hx8H, 0.25H) 26

Quantity estimation diagram

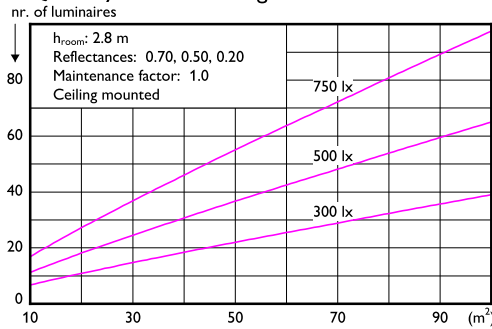


Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30
0.60	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
0.80	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
1.00	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
1.25	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
1.50	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
2.00	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
2.50	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
3.00	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
4.00	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40
5.00	0.40	0.50	0.58	0.38	0.47	0.54	0.37	0.46	0.51	0.27	0.34	0.40

Ceiling mounted

UGR diagram

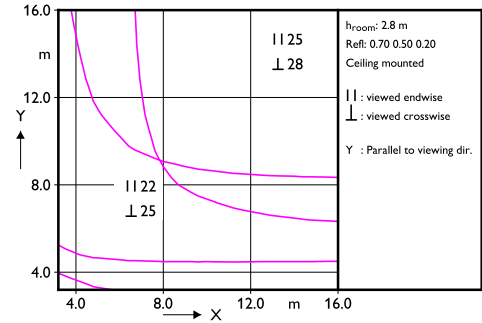

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	12020	11954	11903	12006	12468	13751	16727
50.0	11619	11521	11410	11419	11737	12874	16081
55.0	11265	11152	10976	10870	10999	11929	15304
60.0	10981	10844	10628	10402	10311	10958	14461
65.0	10746	10622	10331	9993	9675	9920	13367
70.0	10588	10468	10130	9691	9152	8863	12067
75.0	10546	10422	10053	9554	8758	7817	10389
80.0	10585	10440	10101	9518	8527	6808	7914
85.0	10668	10477	10176	9634	8481	6116	4448
90.0	10843	10656	10334	9805	8752	6154	2973

(cd/m²)

2020-06-17