



Strong performance spot light for retrofit MR16 halogen spots

MASTER LEDspot LV

Delivering intense accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot lighting. MASTER LEDspot LV is designed to replace halogen or incandescent spots. It realizes natural colors, enables cozy and comfortable ambience for residential, hospitality and emphasizes the beauty of merchandise in retail. New smaller housing provides perfect fitting with majority of luminaires in a market with a MR16 GU 5.3 holder. It not only employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V halogen electronic transformers, it also delivers high beam intensity which is equivalent to halogen MR16 spots. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers. Its high SDCM ensure stricter color consistency, that is maintained over product life. MASTER LEDspot LV delivers huge energy savings and minimizes maintenance cost without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within short period time.

Benefits

- · High intensity of beam for accent lighting in professional applications
- · Strong brightness maintained over time
- More natural colors realised for cozy ambience for hospitality and better merchandise display in retail application


Features

- · High intensity of beam equivalent to halogen spots
- Better color realisation with high CRI value, and strong color consistency over time
- · Clearly defined beam spread for accent lighting
- Compatible with an extensive range of transformers and smooth dimming for dimmable products
- · High lumen maintenance with long lifetime up to 40,000 hours

Application

- · Home: Living room, bed room, hall way
- Hospitality: Hotel guest room, corridors, lobby, reception area, restaurant, bars, cafes
- · Retail: Exibitions, display cabinets, shops, dressing room, check out area

Dimensional drawing



Product	D	С
MASTER LED 6.5-50W 927 MR16 10D Dim	50 mm	46.5 mm
MASTER LED 6.5-50W 927 MR16 24D Dim	50 mm	
MASTER LED 6.5-50W 927 MR16 36D Dim	50 mm	
MASTER LED 6.5-50W 930 MR16 10D Dim	50 mm	46.5 mm
MASTER LED 6.5-50W 930 MR16 24D Dim	50 mm	46.5 mm
MASTER LED 6.5-50W 930 MR16 36D Dim	50 mm	46.5 mm
MASTER LED 6.5-50W 940 MR16 24D Dim	50 mm	46.5 mm
MASTER LED 6.5-50W 940 MR16 36D Dim	50 mm	46.5 mm
MASTER LED 7.5-50W+ 827 MR16 24D Dim CN	50 mm	46.5 mm
MASTER LED 7.5-50W+ 827 MR16 36D Dim	50 mm	46.5 mm
MASTER LED 7.5-50W+ 830 MR16 36D Dim	50 mm	46.5 mm

General Information	
Cap-Base	GU5.3
Switching Cycle	50,000
Nominal lifetime	40,000 hour(s)
Light Technical	
LLMF At End Of Nominal Lifetime	70 %
(Nom)	
Operating and Electrical	
Input Frequency	- Hz
Line Frequency	- Hz
Starting Time (Nom)	0.5 s
Wattage Equivalent	50 W
Controls and Dimming	
Dimmable	Only with specific
	dimmers
Mechanical and Housing	
Bulb Shape	MR16

Light Technical (1/2)

			Correlated Color	Color	
		Beam Angle	Temperature	rendering	Color
Order Code	Full Product Name	(Nom)	(Nom)	index (CRI)	Code
929003071908	MASTER LED 6.5-50W 927	24 degree(s)	2700 K	90	927
	MR16 24D Dim				
929003072008	MASTER LED 6.5-50W 930	24 degree(s)	3000 K	90	930
	MR16 24D Dim				
929003072108	MASTER LED 6.5-50W 940	24 degree(s)	4000 K	90	940
	MR16 24D Dim				
929003072208	MASTER LED 6.5-50W 927	36 degree(s)	2700 K	90	927
	MR16 36D Dim				
929003072308	MASTER LED 6.5-50W 930	36 degree(s)	3000 K	90	930
	MR16 36D Dim				
929003072408	MASTER LED 6.5-50W 940	36 degree(s)	4000 K	90	940
	MR16 36D Dim				
929003072510	MASTER LED 7.5-50W+ 827	24 degree(s)	2700 K	80	827
	MR16 24D Dim CN				
929003072708	MASTER LED 7.5-50W+ 827	36 degree(s)	2700 K	80	827
	MR16 36D Dim				

			Correlated Color	Color	
		Beam Angle	Temperature	rendering	Color
Order Code	Full Product Name	(Nom)	(Nom)	index (CRI)	Code
929003072808	MASTER LED 7.5-50W+ 830	36 degree(s)	3000 K	80	830
	MR16 36D Dim				
929003071608	MASTER LED 6.5-50W 927	10 degree(s)	2700 K	90	927
	MR16 10D Dim				
929003071708	MASTER LED 6.5-50W 930	10 degree(s)	3000 K	90	930
	MR16 10D Dim				

Light Technical (2/2)

8	(-, -,		
			Luminous
Order Code	Full Product Name	Luminous Flux	Intensity (Nom)
929003071908	MASTER LED 6.5-50W 927 MR16	500 lm	2,800 cd
	24D Dim		
929003072008	MASTER LED 6.5-50W 930 MR16	500 lm	2,800 cd
	24D Dim		
929003072108	MASTER LED 6.5-50W 940 MR16	530 lm	3,400 cd
	24D Dim		
929003072208	MASTER LED 6.5-50W 927 MR16	500 lm	1,400 cd
	36D Dim		
929003072308	MASTER LED 6.5-50W 930 MR16	500 lm	1,600 cd
	36D Dim		
929003072408	MASTER LED 6.5-50W 940 MR16	530 lm	1,600 cd
	36D Dim		

			Luminous
Order Code	Full Product Name	Luminous Flux	Intensity (Nom)
929003072510	MASTER LED 7.5-50W+ 827 MR16	660 lm	3,100 cd
	24D Dim CN		
929003072708	MASTER LED 7.5-50W+ 827 MR16	660 lm	1,700 cd
	36D Dim		
929003072808	MASTER LED 7.5-50W+ 830 MR16	660 lm	1,700 cd
	36D Dim		
929003071608	MASTER LED 6.5-50W 927 MR16	500 lm	5,300 cd
	10D Dim		
929003071708	MASTER LED 6.5-50W 930 MR16	500 lm	5,300 cd
	10D Dim		


Operating and Electrical

Order Code	Full Product Name	Power Consumption
929003071908	MASTER LED 6.5-50W 927 MR16 24D Dim	6.5 W
929003072008	MASTER LED 6.5-50W 930 MR16 24D Dim	6.5 W
929003072108	MASTER LED 6.5-50W 940 MR16 24D Dim	6.5 W
929003072208	MASTER LED 6.5-50W 927 MR16 36D Dim	6.5 W
929003072308	MASTER LED 6.5-50W 930 MR16 36D Dim	6.5 W
929003072408	MASTER LED 6.5-50W 940 MR16 36D Dim	6.5 W


Order Code	Full Product Name	Power Consumption
929003072510	MASTER LED 7.5-50W+ 827 MR16 24D Dim CN	7.5 W
929003072708	MASTER LED 7.5-50W+ 827 MR16 36D Dim	7.5 W
929003072808	MASTER LED 7.5-50W+ 830 MR16 36D Dim	7.5 W
929003071608	MASTER LED 6.5-50W 927 MR16 10D Dim	6.5 W
929003071708	MASTER LED 6.5-50W 930 MR16 10D Dim	6.5 W


Temperature

		T-Case Maximum
Order Code	Full Product Name	(Nom)
929003071908	MASTER LED 6.5-50W 927 MR16 24D Dim	90 ℃
929003072008	MASTER LED 6.5-50W 930 MR16 24D Dim	90 ℃
929003072108	MASTER LED 6.5-50W 940 MR16 24D Dim	90 ℃
929003072208	MASTER LED 6.5-50W 927 MR16 36D Dim	90 ℃
929003072308	MASTER LED 6.5-50W 930 MR16 36D Dim	90 ℃
929003072408	MASTER LED 6.5-50W 940 MR16 36D Dim	90 ℃
929003072510	MASTER LED 7.5-50W+ 827 MR16 24D Dim CN	93 ℃
929003072708	MASTER LED 7.5-50W+ 827 MR16 36D Dim	93 ℃
929003072808	MASTER LED 7.5-50W+ 830 MR16 36D Dim	93 ℃
929003071608	MASTER LED 6.5-50W 927 MR16 10D Dim	90 ℃
929003071708	MASTER LED 6.5-50W 930 MR16 10D Dim	90 ℃




3

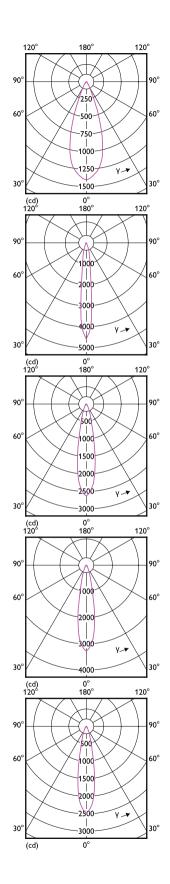

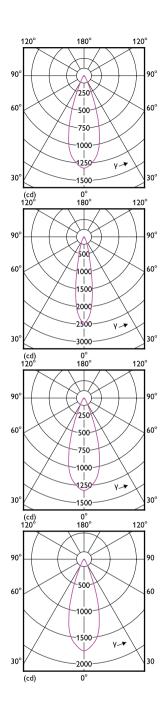


data subject to change


Accent Diagrams




Accent Diagram - MASTER LED 6.5-50W 930 MR16 24D Dim




Accent Diagram - MASTER LED 6.5-50W 930 MR16 36D Dim




Accent Diagram - MASTER LED 6.5-50W 930 MR16 10D Dim




Accent Diagram - MASTER LED 6.5-50W 927 MR16 24D Dim




Accent Diagram - MASTER LED 7.5-50W+ 827 MR16 24D Dim CN




Accent Diagram - MASTER LED 6.5-50W 927 MR16 10D Dim



Accent Diagram - MASTER LED 6.5-50W 940 MR16 36D Dim




Accent Diagram - MASTER LED 6.5-50W 940 MR16 24D Dim




Accent Diagram - MASTER LED 7.5-50W+ 830 MR16 36D Dim

Accent Diagrams




Accent Diagram - MASTER LED 6.5-50W 927 MR16 36D Dim


Beam Diagrams




Beam diagram - MASTER LED 6.5-50W 940 MR16 36D Dim




Beam diagram - MASTER LED 6.5-50W 927 MR16 24D Dim




Beam diagram - MASTER LED 6.5-50W 930 MR16 36D Dim



Beam diagram - MASTER LED 7.5-50W+ 827 MR16 24D Dim CN





Beam diagram - MASTER LED 6.5-50W 927 MR16 10D Dim




Beam diagram - MASTER LED 6.5-50W 940 MR16 24D Dim

Beam Diagrams








Beam diagram - MASTER LED 7.5-50W+ 830 MR16 36D Dim Beam diagram - MASTER LED 6.5-50W 930 MR16 10D Dim

Beam diagram - MASTER LED 6.5-50W 927 MR16 36D Dim



Beam diagram - MASTER LED 6.5-50W 930 MR16 24D Dim

