



Reliable, high performance technology for extreme LED applications

Xitanium LED drivers – programmable

Our Xitanium programmable Xtreme LED drivers with global input voltage (UL, ENEC) are designed to deliver high performance, protection and configurability. The Xtreme technology ensures maximum robustness and protection with a very long lifetime. Configuration of programmable drivers can be done via DALI and the MultiOne software.

Benefits

- Ultimate robustness, energy savings through high efficiency and via multiple dimming and lower maintenance costs
- Fully programmable LED-drivers designed for connected lighting systems
- Easy to design-in, configure and install with extended diagnostics via MultiOne

Features

- High surge protection (CM/DM)
- Multiple control interfaces: DALI, 1-10V (Prog+ : also AmpDim)
- Autonomous dimming via integrated DynaDimmer
- Constant Light Output (CLO)
- Input voltage range 120-277Vac
- Long lifetime and robust protection against moisture, vibration and temperature

Xitanium LED drivers - programmable

Application

- Outdoor
- Industry

Versions





Xitanium Prog 300W

Xitanium Prog 100W

Xitanium Prog 40W

Dimensional drawing

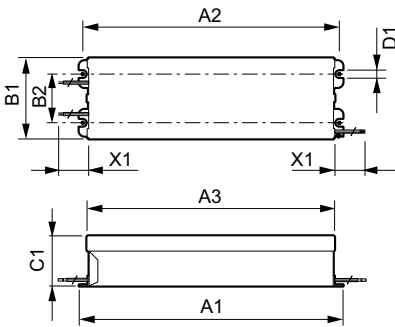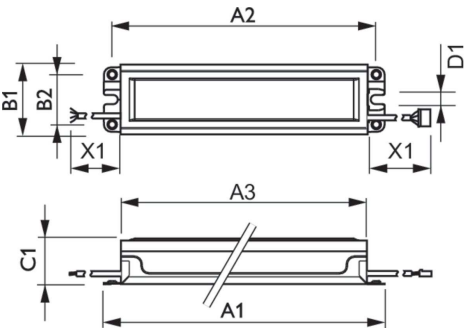


Product	D1	A2	B2	C1	A1	A3	X1	B1
Xitanium 150W 0.1-1.05A Prog+ sXt	8.0 mm	226.2 mm	42.9 mm	37.1 mm	240.5 mm	211.1 mm	500 mm	59.1 mm
Xitanium 150W 0.35-0.7A Prog GL sXt	8 mm	226.2 mm	42.9 mm	37.1 mm	240.5 mm	211.1 mm	500 mm	59.1 mm
Xitanium 75W 0.1-1.05A Prog+ sXt	8.0 mm	226.2 mm	42.9 mm	37.1 mm	240.5 mm	211.1 mm	500 mm	59.1 mm
Xitanium 75W 0.35-0.7A Prog GL sXt	8 mm	226.2 mm	42.9 mm	37.1 mm	240.5 mm	211.1 mm	500 mm	59.1 mm

Product	D1	A2	B2	C1	A1	A3	X1	B1
Xitanium 40W 0.70A Prog+ GL- J sXt	5.0 mm	144.2 mm	27.4 mm	28.3 mm	148.2 mm	139.3 mm	275 mm	45.6 mm

Xitanium LED drivers - programmable

Dimensional drawing

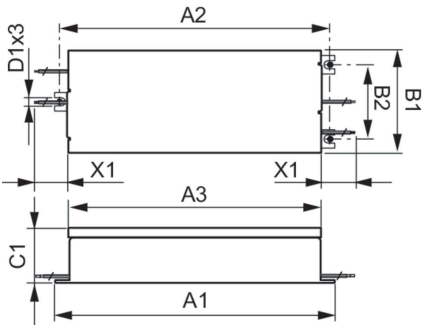

Product	D1	A2	B2	C1	A1	A3	X1	B1
XITANIUM 100W	5.5	155	50	38 mm	165	147.4	275	70 mm
0.7A PROG+ GL-Z	mm	mm	mm		mm	mm	mm	
sXt								

