



Solar Flood Lighting

Essential SmartBright Solar Flood Light

Solar flood light with lithium ferro phosphate battery built in the luminaire, Remote controller and installation accessories included. IP65, plastic housing. Available in 600, 900, 1500, 2500, 3000 and 4000 Lumens

Benefits

- Energy efficient and Environmentally friendly: Solar floodlights are powered by the sun, which means they don't rely on electricity from the grid. This reduces your energy bills and saves you money in the long run.
- Easy installation: Solar floodlights are easy to install and require no wiring or electrical work. This makes them a convenient and hassle-free option. All you need to do is mount them in an area that receives plenty of sunlight.
- Convenience: Turn on automatically at dusk and turn off at dawn, so you don't have to worry about manually turning on and off.
- Increased security : Solar floodlights can improve the security of your home or property by providing bright light in dark areas.
- Increased independence: By using solar floodlights, you are less dependent on the power grid and can enjoy greater independence in terms of your energy needs. This can be especially beneficial in remote or off-grid locations.

Features

- Solar floodlight range of product– equivalent to 60W, 90W and 150W, 250W, 300W, 400W traditional floodlights respectively
- Infra red remote controller to dim luminaires
- Plastic housing
- LiFePO4 battery included inside the luminaire
- High luminous efficacy up-to 165lm/watt to maximize battery performance

Essential SmartBright Solar Flood Light

Application

- Amenities
- Parking areas
- Landscapes
- Security
- Architectural lighting


Warnings and Safety

- Install the luminaire in a sunny place that is not shaded by trees, buildings and walls, then the solar panel can receive the maximum sunlight for charging the battery.
- Charge the product under sunlight for at least 8 hours before first time using.
- This luminaire does not need any external electrical connection. It works 100% on solar energy.

Versions



Dimensional drawing

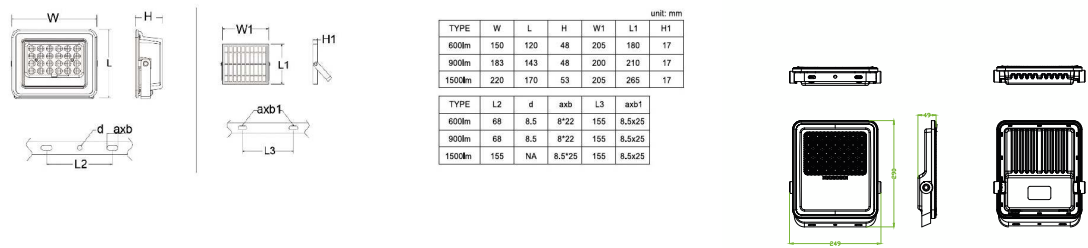

Essential SmartBright Solar Flood Light

Dimensional drawing



Light Technical	
Color rendering index (CRI)	70
Operating and Electrical	
Battery type	LiFePO4
Battery voltage	3.2 V
Grid connection type	Off grid
Panel type	Mono crystalline
Panel voltage	5 V
Controls and Dimming	
Configurability	Not configurable
Mechanical and Housing	
Housing Color	Grey
Ingress protection code	IP65

Order Code	Full Product Name	Correlated Color Temperature (Nom)
911401883102	BVC080 LED15/765	6500 K
911401883402	BVC080 LED15/730	3000 K
911401883702	BVC080 LED15/765 Pro	6500 K
911401892902	BVC080 LED15/740	4000 K
911401874902	BVC080 LED25/765 Solar	6500 K
911401875202	BVC080 LED25/730 Solar	3000 K
911401875102	BVC080 LED40/765 Solar	6500 K
911401875402	BVC080 LED40/730 Solar	3000 K
911401875002	BVC080 LED30/765 Solar	6500 K
911401875302	BVC080 LED30/730 Solar	3000 K
911401882902	BVC080 LED6/765	6500 K
911401883202	BVC080 LED6/730	3000 K
911401883502	BVC080 LED6/765 Pro	6500 K
911401892702	BVC080 LED6/740	4000 K
911401883002	BVC080 LED9/765	6500 K
911401883302	BVC080 LED9/730	3000 K
911401883602	BVC080 LED9/765 Pro	6500 K
911401892802	BVC080 LED9/740	4000 K

Operating and Electrical

Order Code	Full Product Name	Battery ampere hour	Battery charging & discharging cycles	Charge controller type	Panel peak wattage
911401883102	BVC080 LED15/765	8 Ah	500	PWM	8 W
911401883402	BVC080 LED15/730	8 Ah	500	PWM	8 W
911401883702	BVC080 LED15/765 Pro	8 Ah	1000	PWM	8 W
911401892902	BVC080 LED15/740	8 Ah	500	PWM	8 W
911401874902	BVC080 LED25/765 Solar	14.3 Ah	500	-	15 W

Order Code	Full Product Name	Battery ampere hour	Battery charging & discharging cycles	Charge controller type	Panel peak wattage
911401875202	BVC080 LED25/730 Solar	14.3 Ah	500	-	15 W
911401875102	BVC080 LED40/765 Solar	28.5 Ah	500	-	30 W
911401875402	BVC080 LED40/730 Solar	28.5 Ah	500	-	30 W

Essential SmartBright Solar Flood Light

	Full Product	Battery	Battery	Charge	Panel peak
Order Code	Name	ampere	charging &	controller	Panel peak
		hour	discharging	type	wattage
911401875002	BVC080	19 Ah	500	-	20 W
	LED30/765				
	Solar				
911401875302	BVC080	19 Ah	500	-	20 W
	LED30/730				
	Solar				
911401882902	BVC080	4 Ah	500	PWM	5 W
	LED6/765				
911401883202	BVC080	4 Ah	500	PWM	5 W
	LED6/730				
911401883502	BVC080	4 Ah	1000	PWM	5 W
	LED6/765 Pro				

	Full Product	Battery	Battery	Charge	Panel peak
Order Code	Name	ampere	charging &	controller	Panel peak
		hour	discharging	type	wattage
911401892702	BVC080	4 Ah	500	PWM	5 W
	LED6/740				
911401883002	BVC080	4 Ah	500	PWM	6 W
	LED9/765				
911401883302	BVC080	4 Ah	500	PWM	6 W
	LED9/730				
911401883602	BVC080	4 Ah	1000	PWM	6 W
	LED9/765 Pro				
911401892802	BVC080	4 Ah	500	PWM	6 W
	LED9/740				

Controls and Dimming

Order Code	Full Product Name	Dimmable	Solar dimming profile
911401883102	BVC080 LED15/765	Preset Dimming	Preset Dimming
911401883402	BVC080 LED15/730	Preset Dimming	Preset Dimming
911401883702	BVC080 LED15/765 Pro	Preset Dimming	Preset Dimming
911401892902	BVC080 LED15/740	Preset Dimming	Preset Dimming
911401874902	BVC080 LED25/765 Solar	No	Pre-configured
911401875202	BVC080 LED25/730 Solar	No	Pre-configured
911401875102	BVC080 LED40/765 Solar	No	Pre-configured
911401875402	BVC080 LED40/730 Solar	No	Pre-configured
911401875002	BVC080 LED30/765 Solar	No	Pre-configured

Order Code	Full Product Name	Dimmable	Solar dimming profile
911401875302	BVC080 LED30/730 Solar	No	Pre-configured
911401882902	BVC080 LED6/765	Preset Dimming	Preset Dimming
911401883202	BVC080 LED6/730	Preset Dimming	Preset Dimming
911401883502	BVC080 LED6/765 Pro	Preset Dimming	Preset Dimming
911401892702	BVC080 LED6/740	Preset Dimming	Preset Dimming
911401883002	BVC080 LED9/765	Preset Dimming	Preset Dimming
911401883302	BVC080 LED9/730	Preset Dimming	Preset Dimming
911401883602	BVC080 LED9/765 Pro	Preset Dimming	Preset Dimming
911401892802	BVC080 LED9/740	Preset Dimming	Preset Dimming

Mechanical and Housing

	Full Product	Battery	Overall	Overall	Overall
Order Code	Name	location	height	length	width
911401883102	BVC080	Inbuilt	53 mm	220 mm	170 mm
	LED15/765	luminaire			
911401883402	BVC080	Inbuilt	53 mm	220 mm	170 mm
	LED15/730	luminaire			
911401883702	BVC080	Inbuilt	53 mm	220 mm	170 mm
	LED15/765 Pro	luminaire			
911401892902	BVC080	Inbuilt	53 mm	220 mm	170 mm
	LED15/740	luminaire			
911401874902	BVC080	In built	44 mm	257 mm	215 mm
	LED25/765 Solar				
911401875202	BVC080	In built	44 mm	257 mm	215 mm
	LED25/730 Solar				
911401875102	BVC080	In built	60 mm	365 mm	288 mm
	LED40/765 Solar				
911401875402	BVC080	In built	60 mm	365 mm	288 mm
	LED40/730 Solar				
911401875002	BVC080	In built	49 mm	290 mm	249 mm
	LED30/765 Solar				

	Full Product	Battery	Overall	Overall	Overall
Order Code	Name	location	height	length	width
911401875302	BVC080	In built	49 mm	290 mm	249 mm
	LED30/730 Solar				
911401882902	BVC080	Inbuilt	48 mm	150 mm	120 mm
	LED6/765	luminaire			
911401883202	BVC080	Inbuilt	48 mm	150 mm	120 mm
	LED6/730	luminaire			
911401883502	BVC080	Inbuilt	48 mm	150 mm	120 mm
	LED6/765 Pro	luminaire			
911401892702	BVC080	Inbuilt	48 mm	150 mm	120 mm
	LED6/740	luminaire			
911401883002	BVC080	Inbuilt	48 mm	183 mm	143 mm
	LED9/765	luminaire			
911401883302	BVC080	Inbuilt	48 mm	183 mm	143 mm
	LED9/730	luminaire			
911401883602	BVC080	Inbuilt	48 mm	183 mm	143 mm
	LED9/765 Pro	luminaire			
911401892802	BVC080	Inbuilt	48 mm	183 mm	143 mm
	LED9/740	luminaire			

Essential SmartBright Solar Flood Light

Approval and Application

Order Code	Full Product Name	Ambient temperature range
911401883102	BVC080 LED15/765	0 to +45 °C
911401883402	BVC080 LED15/730	0 to +45 °C
911401883702	BVC080 LED15/765 Pro	0 to +45 °C
911401892902	BVC080 LED15/740	0 to +45 °C
911401874902	BVC080 LED25/765 Solar	0 °C to 50 °C
911401875202	BVC080 LED25/730 Solar	0 °C to 50 °C
911401875102	BVC080 LED40/765 Solar	0 °C to 50 °C
911401875402	BVC080 LED40/730 Solar	0 °C to 50 °C
911401875002	BVC080 LED30/765 Solar	0 °C to 50 °C

Order Code	Full Product Name	Ambient temperature range
911401875302	BVC080 LED30/730 Solar	0 °C to 50 °C
911401882902	BVC080 LED6/765	0 to +45 °C
911401883202	BVC080 LED6/730	0 to +45 °C
911401883502	BVC080 LED6/765 Pro	0 to +45 °C
911401892702	BVC080 LED6/740	0 to +45 °C
911401883002	BVC080 LED9/765	0 to +45 °C
911401883302	BVC080 LED9/730	0 to +45 °C
911401883602	BVC080 LED9/765 Pro	0 to +45 °C
911401892802	BVC080 LED9/740	0 to +45 °C

