



SmartBright LED Downlight – perfect green light

SmartBright LED Downlight

When switching from conventional CFL to LED lighting, most customers want a green solution with an attractive total cost of ownership. SmartBright LED Downlight is characterized by low cost and high efficiency, providing the end-user with the perfect green light fixture.

Benefits

- Cost-effective
- 60% energy saving compared with CFL
- Simple yet elegant design

Features





- System efficiency > 85 lm/W
- Good color consistency, ensuring visual comfort
- Safe and stable

Application

- Shops
- Public areas

SmartBright LED Downlight

Dimensional drawing



SmartBright LED Downlight

General Information	
Driver included	Yes
Light source replaceable	No
Number of gear units	1 unit
Light Technical	
Color rendering index (CRI)	80
Optic type	Beam angle 100°
Operating and Electrical	
Protection class IEC	Safety class II
Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Suitable for random switching	Not applicable
Controls and Dimming	
Dimmable	Yes
Maximum dim level	10% (depends on dimmer, ELV)
Mechanical and Housing	
Housing Color	White
Mech. impact protection code	IK03
Ingress protection code	IP40/54
Approval and Application	
Ambient temperature range	-20 to +40 °C
Flammability mark	For mounting on normally flammable surfaces
Glow-wire test	Temperature 750 °C, duration 5 s

Light Technical

Order Code	Full Product Name	Correlated Color	Luminous Efficacy	
		Temperature (Nom)	(rated) (Nom)	Luminous Flux
929002576408	DN029B G2 LED8/CCT PSR-E D90 GM	3000 K	106 lm/W	800 lm
929002576508	DN029B G2 LED10/CCT PSR-E D120 GM	3000 K	111 lm/W	1,000 lm
929002576608	DN029B G2 LED12/CCT PSR-E D150 GM	3000 K	114 lm/W	1,200 lm
929002576708	DN029B G2 LED20/CCT PSR-E D200 GM	3000 K	111 lm/W	2,000 lm
929002576808	DN029B G2 LED8/840 PSR-E D90 GM	4000 K	106 lm/W	800 lm
929002590008	DN029B G2 LED8/865 PSR-E D90 GM	6500 K	106 lm/W	800 lm
929002590908	DN029B G2 LED8/830 PSR-E D90 GM	3000 K	106 lm/W	800 lm

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Order Code	Full Product Name	Power Consumption
929002576408	DN029B G2 LED8/CCT PSR-E D90 GM	7.5 W	929002576808	DN029B G2 LED8/840 PSR-E D90 GM	7.5 W
929002576508	DN029B G2 LED10/CCT PSR-E D120 GM	9 W	929002590008	DN029B G2 LED8/865 PSR-E D90 GM	7.5 W
929002576608	DN029B G2 LED12/CCT PSR-E D150 GM	10.5 W	929002590908	DN029B G2 LED8/830 PSR-E D90 GM	7.5 W
929002576708	DN029B G2 LED20/CCT PSR-E D200 GM	18 W			

Initial Performance (IEC Compliant)



Full Product			Luminou	Full Product			Luminous
Order Code	Name	Initial chromaticity	flux tolerance	Order Code	Name	Initial chromaticity	flux tolerance
929002576408	DN029B G2 LED8/CC T PSR-E D90 GM	(3000K@, 0.4400, 0.40304000K@0.37600.36566500K@0.31300.3370)	3000K: ±10%:400 OK: -10% / +20%:65				00K: -10% / +20%

SmartBright LED Downlight

Full Product			Luminou	Full Product			Luminous
Order Code	Name	Initial chromaticity	flux	Order Code	Name	Initial chromaticity	flux
929002576508	DN029B	(3000K@, 0.4400,	3000K:	929002576808	DN029B	(4000K@, 0.3800, 0.3800) 6	+20%:65
	G2	0.40304000K@0.37600.36566500K@0.31300.3370)	±10%:400		G2		00K:
	LED10/CC 6		OK:		LED8/840		-10% /
	T PSR-E		-10% /		PSR-E		+20%
	D120 GM		+20%:65		D90 GM		-10% /
929002576608	DN029B	(3000K@, 0.4400,	3000K:	929002590008	DN029B	(6500K@, 0.3130, 0.3370) 6	+20%
	G2	0.40304000K@0.37600.36566500K@0.31300.3370)	±10%:400		G2		-10% /
	LED12/CC 6		OK:		LED8/865		+20%
	T PSR-E		-10% /		PSR-E		
	D150 GM		+20%:65		D90 GM		
929002576708	DN029B	(3000K@, 0.4400,	3000K:	929002590908	DN029B	(3000K@, 0.4400, 0.4030) 6	+/-10%
	G2	0.40304000K@0.37600.36566500K@0.31300.3370)	±10%:400		G2		
	LED20/C 6		OK:		LED8/830		
			-10% /		PSR-E		
					D90 GM		

Over Time Performance (IEC Compliant)

Order Code	Full Product Name	Driver failure rate at 5000 h
929002576408	DN029B G2 LED8/CCT PSR-E D90 GM	1.2 %
929002576508	DN029B G2 LED10/CCT PSR-E D120 GM	1.2 %
929002576608	DN029B G2 LED12/CCT PSR-E D150 GM	1.2 %
929002576708	DN029B G2 LED20/CCT PSR-E D200 GM	1.2 %
929002576808	DN029B G2 LED8/840 PSR-E D90 GM	1.6 %
929002590008	DN029B G2 LED8/865 PSR-E D90 GM	1.6 %
929002590908	DN029B G2 LED8/830 PSR-E D90 GM	1.6 %

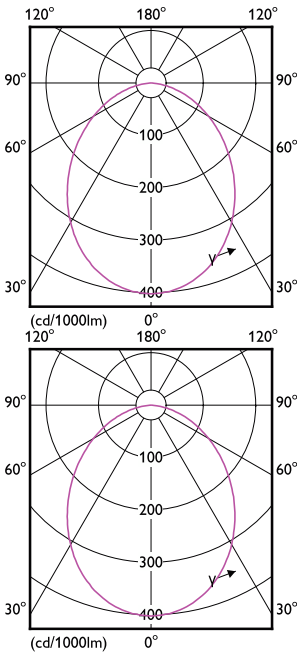

SmartBright LED Downlight

