



Fit-for-use TL5 lamp

TL5 Essential HE Super 80

Philips TL5 Essential Super80 is a new fluorescent lamp which provides home users and professional end-users an aesthetic miniaturized lighting solution with high reliability at low price.

Benefits

- \cdot 40% less tube dimension than T8 fluorescent lamps. Reducing luminaire, stock and transportation cost
- · Slim 16 mm tube allows more compact and flexible luminaire design
- Max lumen output at 35°C ambient temperature, more suitable to actual lighting situation
- \cdot Comfortable working and living ambiences with CRI more than 80
- Provides highly reliable and high quality lighting solution at low cost
- · Creates atmospheres from warm white to cool daylight

Features

- · Small diameter of 16mm only
- "Cold Chamber" technology
- · Applied with electronic ballast for TL5 only
- · Operate at temperature from 5°C to 50°C

Application

• Suitable for use at locations where need compact, high efficient, energy saving lighting. Including offices, shops, supermarkets, schools, hospitals and industrial lighting.

Warnings and Safety

• 20,000 hours lifetime (50% survival point, 3 hour cycle) with preheat ballast which is ENEC compliant. Lifetime performance may differ on non-ENEC compliant ballasts.

Product family leaflet, 2024, July 5


TL5 Essential HE Super 80

Versions





Dimensional drawing

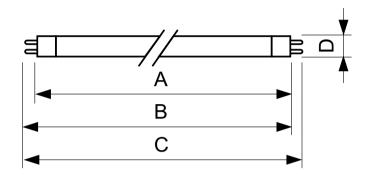

Product	D (max)	A (max)	B (max)	B (min)	C (max)
14 W G5 Cool daylight Linear	17.0 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm
fluorescent tube					
28 W G5 Warm white Linear	17.0 mm	1,149.0 mm	1,156.1 mm	1,153.7 mm	1,163.2 mm
fluorescent tube					

General Information	
Cap-Base	G5
Nominal lifetime	15,000 hour(s)
Light Technical	
Color rendering index (CRI)	82
Operating and Electrical	
Lamp Current (Nom)	0.170 A
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Shape	T5
Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg

Light Technical

			Correlated	Luminous	
			Color	Efficacy	
	Full Product	Color	Temperature	(rated)	Luminous
Order Code	Name	Designation	(Nom)	(Nom)	Flux
927926783058	28 W G5	Warm White	3000 K	94 lm/W	2,900 lm
	Warm white	(WW)			
	Linear				

Order Code	Full Product Name fluorescent tube	Color Designation	Correlated Color Temperature (Nom)	Luminous Efficacy (rated) (Nom)	Luminous Flux
927925986558	14 W G5 Cool daylight Linear fluorescent tube	Cool Daylight	6500 K	84 lm/W	1,260 lm

TL5 Essential HE Super 80

Operating and Electrical

Order Code	Full Product Name	Power Consumption
927926783058	28 W G5 Warm white Linear fluorescent tube	28 W

Order Code	Full Product Name	Power Consumption
927925986558	14 W G5 Cool daylight Linear fluorescent tube	14 W

Approval and Application

		Energy Consumption kWh/
Order Code	Full Product Name	1000 h
927926783058	28 W G5 Warm white Linear fluorescent	31 kWh
	tube	

		Energy Consumption kWh/
Order Code	Full Product Name	1000 h
927925986558	14 W G5 Cool daylight Linear fluorescent	15 kWh
	tube	

