



Sophisticated yet simple energy-efficient lighting solutions

Dynalite Integration Devices

Within any modern project, many third-party systems can be found performing different roles. Each separate system may use a different protocol for communication. Philips Dynalite has developed a range of gateway devices that can be used to synchronize these systems' functions into one integrated system solution. By utilizing the correct gateway, different systems can be integrated, allowing end-users access to a fully automated site from one interface. By successfully integrating third-party systems with a Dynalite solution, repetitive end-user interaction is reduced.

Benefits

- Reduces repetitive end-user interaction
- Allows access to fully automated site from one interface

Features

- A range of different gateways provides different integration opportunities and network management options

Application

- Depends on the lighting system in which the controls are used

Versions

DPMI940-DALI Dry Contact Interface



SlimBlend SR-RC400B VPC ACL



DDNG-KNX CONN new PS





PDEG Ethernet Gateway




Dynalite PDEB Ethernet Bridge integration device



Dimensional drawing



Dimensional drawing

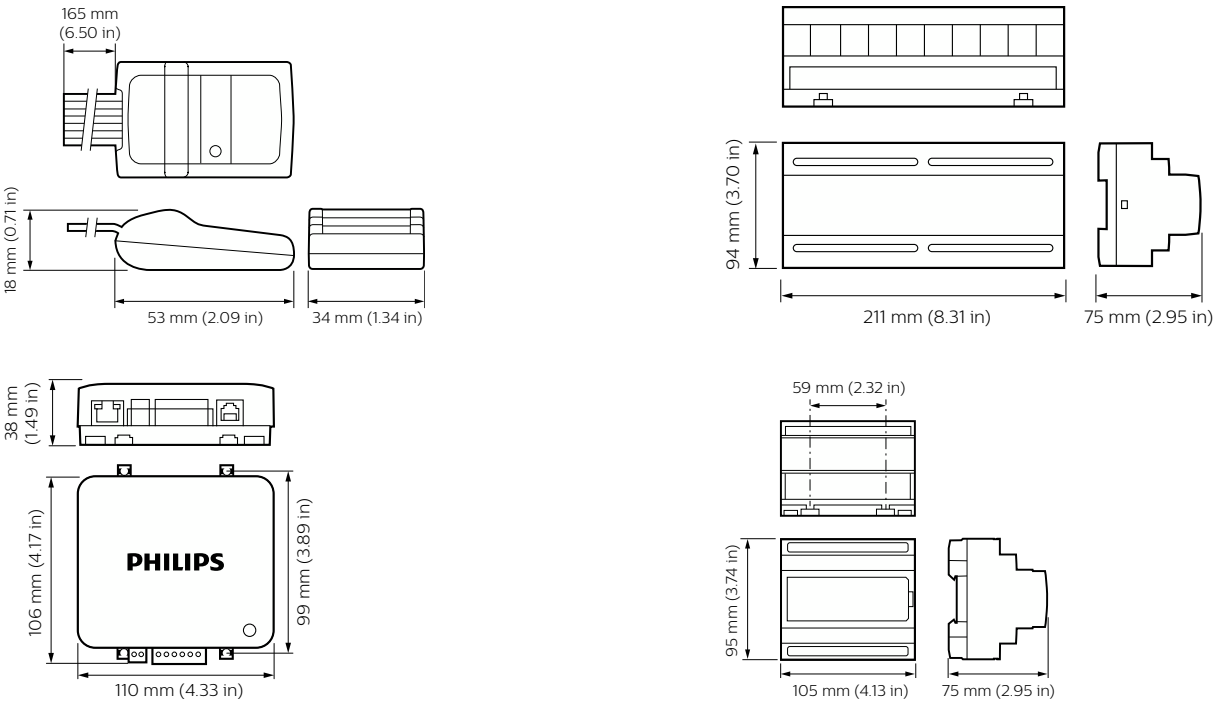

Product details

Front of the PDEG Ethernet Gateway



DDNG-KNX Front



DDNG23_new_Front



Front image of the PDEB Ethernet Bridge integration device



