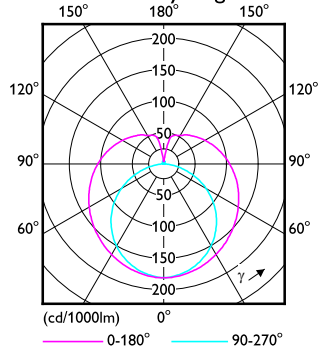


1 x TLED 9.5W 3500K 9290037948

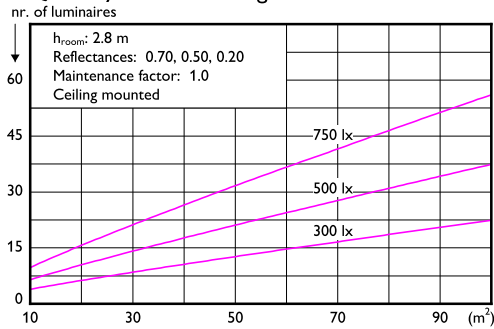
1 x 1760 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.29
 Service downward 0.71

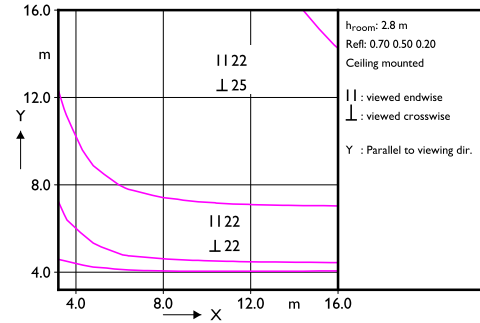
CIE flux code 35 63 84 71 100

UGRcen (4Hx8H, 0.25H) 24

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
0.60	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
0.80	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
1.00	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
1.25	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
1.50	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
2.00	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
2.50	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
3.00	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
4.00	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
5.00	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	6308	6208	6321	6502	6937	7933	9563
50.0	6117	6000	6105	6219	6588	7602	9369
55.0	5972	5830	5922	5973	6280	7260	9107
60.0	5867	5695	5769	5745	5972	6886	8777
65.0	5791	5607	5683	5572	5700	6488	8334
70.0	5764	5548	5607	5414	5445	6053	7744
75.0	5774	5547	5615	5341	5277	5635	6982
80.0	5841	5583	5645	5312	5182	5216	5837
85.0	5955	5683	5767	5391	5232	4928	4094
90.0	6146	5852	5960	5585	5482	5170	2128

(cd/m²)

s23120002a

2024-02-21