


MAG SPOTLIGHT 6.5W 550LM 1 x 9290032081 4000K

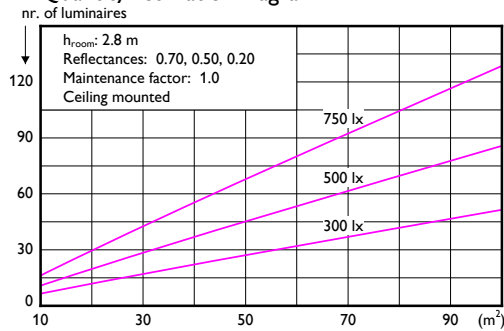
1 x 550 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

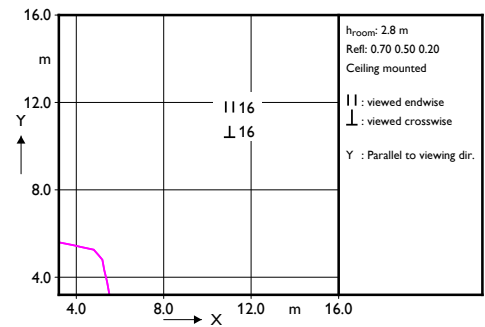
CIE flux code 95 99 100 100 100

UGRcen (4Hx8H, 0.25H) 16

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.82	0.78	0.81	0.79	0.78	0.74	0.74	0.71	0.73	0.71	0.70	0.70
0.80	0.89	0.83	0.88	0.85	0.83	0.79	0.79	0.76	0.78	0.76	0.75	0.75
1.00	0.95	0.88	0.94	0.91	0.88	0.84	0.84	0.81	0.83	0.81	0.80	0.80
1.25	1.00	0.92	0.99	0.95	0.91	0.88	0.88	0.85	0.87	0.85	0.84	0.84
1.50	1.04	0.95	1.03	0.98	0.94	0.91	0.90	0.88	0.90	0.88	0.86	0.86
2.00	1.11	0.99	1.09	1.03	0.98	0.96	0.95	0.94	0.94	0.93	0.91	0.91
2.50	1.15	1.02	1.13	1.07	1.01	0.99	0.98	0.97	0.97	0.96	0.94	0.94
3.00	1.18	1.04	1.16	1.09	1.03	1.02	1.00	0.99	0.99	0.98	0.96	0.96
4.00	1.22	1.06	1.19	1.11	1.05	1.04	1.02	1.02	1.01	1.00	0.98	0.98
5.00	1.24	1.07	1.20	1.13	1.06	1.05	1.03	1.03	1.02	1.01	0.99	0.99

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	31560	31560	31560	31560	31560	31560	31560
50.0	23934	23934	23934	23934	23934	23934	23934
55.0	16229	16229	16229	16229	16229	16229	16229
60.0	8186	8186	8186	8186	8186	8186	8186
65.0	5385	5385	5385	5385	5385	5385	5385
70.0	3623	3623	3623	3623	3623	3623	3623
75.0	2782	2782	2782	2782	2782	2782	2782
80.0	1301	1301	1301	1301	1301	1301	1301
85.0	2209	2209	2209	2209	2209	2209	2209
90.0	0	0	0	0	0	0	0

(cd/m²)

2022-03-10