


ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

CL200 20W
CL200 U ceiling
Signify N.V.

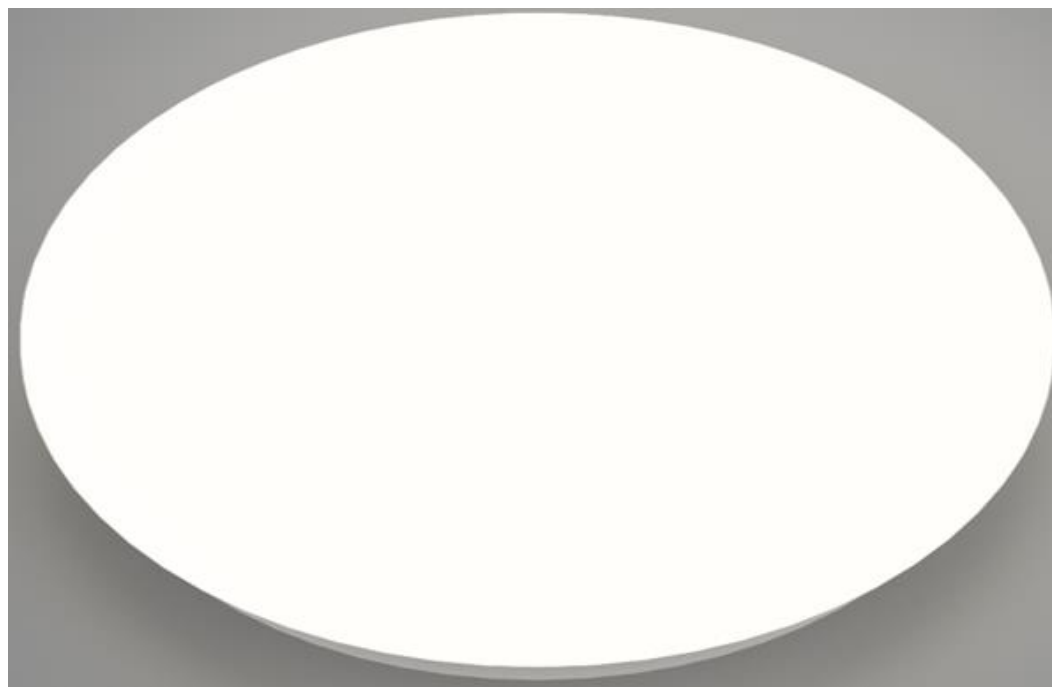

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Signify
Address	5600 VB Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☒ Internal certification ☐ External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	CL200 20W
Additional labels	CL200 U ceiling
Product reference	915005774211
Place of production	CHINA
Period for data	2024
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	0.571 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	1.15E+01
GWP-total, A1-A3 (kgCO ₂ e)	1.09E+01
Secondary material, inputs (%)	5.28
Secondary material, outputs (%)	57.9
Total energy use, A1-A3 (kWh)	37.3
Net fresh water use, A1-A3 (m ³ e)	0.06

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT DESCRIPTION

CL200 EC RD 20W 40K W HV 06

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	51.81	APAC
Minerals	0	Not applicable
Fossil materials	48.19	APAC
Bio-based materials	0	Not applicable

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.167

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	0.571 kg
Functional unit	2300 Lumens over 15000 hours
Reference service life	15000 hours

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify's manufacturing facilities are included in this stage. The product is made of metals, plastics, and electronic components. All components are transported to Signify's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the

waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from CHINA's electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY



LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. EcoInvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	1.05E+01	1.83E-01	1.57E-01	1.09E+01	1.83E-01	6.21E-01	MNR	MNR	MNR	MNR	MNR	3.42E+02	MNR	MNR	7.86E-03	3.15E-01	2.23E-01	-3.97E+00
GWP – fossil	kg CO ₂ e	1.05E+01	1.83E-01	7.57E-01	1.15E+01	1.83E-01	1.61E-02	MNR	MNR	MNR	MNR	MNR	3.42E+02	MNR	MNR	7.86E-03	3.15E-01	1.80E-01	-3.97E+00
GWP – biogenic	kg CO ₂ e	-4.31E-02	0.00E+00	-6.04E-01	-6.47E-01	7.08E-05	6.04E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	4.31E-02	-8.28E-04
GWP – LULUC	kg CO ₂ e	1.42E-02	6.75E-05	4.13E-03	1.84E-02	6.75E-05	5.54E-06	MNR	MNR	MNR	MNR	MNR	4.05E-02	MNR	MNR	2.90E-06	9.37E-06	5.97E-06	-4.16E-04
Ozone depletion pot.	kg CFC ₁₁ e	3.52E-07	4.21E-08	5.54E-08	4.50E-07	4.21E-08	1.59E-09	MNR	MNR	MNR	MNR	MNR	1.77E-06	MNR	MNR	1.81E-09	1.23E-09	8.96E-10	-1.06E-07
Acidification potential	mol H ⁺ e	7.28E-02	7.75E-04	3.81E-03	7.74E-02	7.75E-04	1.26E-04	MNR	MNR	MNR	MNR	MNR	1.79E+00	MNR	MNR	3.33E-05	1.31E-04	5.85E-05	-4.12E-02
EP-freshwater ²⁾	kg Pe	5.15E-04	1.50E-06	4.24E-05	5.59E-04	1.50E-06	1.67E-07	MNR	MNR	MNR	MNR	MNR	7.25E-03	MNR	MNR	6.43E-08	3.06E-07	1.21E-07	-2.49E-04
EP-marine	kg Ne	1.04E-02	2.30E-04	1.40E-03	1.21E-02	2.30E-04	5.35E-05	MNR	MNR	MNR	MNR	MNR	3.68E-01	MNR	MNR	9.89E-06	4.59E-05	3.15E-05	-4.43E-03
EP-terrestrial	mol Ne	1.14E-01	2.54E-03	9.76E-03	1.26E-01	2.54E-03	5.55E-04	MNR	MNR	MNR	MNR	MNR	4.05E+00	MNR	MNR	1.09E-04	4.88E-04	2.45E-04	-5.13E-02
POCP (“smog”) ³⁾	kg NMVOCe	3.70E-02	8.13E-04	2.87E-03	4.07E-02	8.13E-04	1.39E-04	MNR	MNR	MNR	MNR	MNR	1.05E+00	MNR	MNR	3.49E-05	1.23E-04	6.48E-05	-1.48E-02
ADP-minerals & metals ⁴⁾	kg Sbe	3.07E-04	4.29E-07	3.20E-06	3.10E-04	4.29E-07	5.20E-08	MNR	MNR	MNR	MNR	MNR	1.00E-03	MNR	MNR	1.84E-08	6.20E-07	2.33E-08	-8.17E-05
ADP-fossil resources	MJ	1.16E+02	2.75E+00	9.86E+00	1.29E+02	2.75E+00	1.25E-01	MNR	MNR	MNR	MNR	MNR	2.97E+03	MNR	MNR	1.18E-01	1.19E-01	8.20E-02	-3.87E+01
Water use ⁵⁾	m ³ e depr.	2.26E+00	1.23E-02	3.62E-01	2.64E+00	1.23E-02	2.91E-02	MNR	MNR	MNR	MNR	MNR	3.60E+01	MNR	MNR	5.28E-04	1.33E-02	8.55E-03	-2.78E-01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	7.71E-07	2.11E-08	6.09E-08	8.53E-07	2.11E-08	1.16E-09	MNR	MNR	MNR	MNR	MNR	2.52E-05	MNR	MNR	9.05E-10	1.16E-09	6.15E-10	-2.28E-07
Ionizing radiation ⁶⁾	kBq U235e	3.42E-01	1.31E-02	6.04E-02	4.16E-01	1.31E-02	4.47E-04	MNR	MNR	MNR	MNR	MNR	4.74E+00	MNR	MNR	5.62E-04	5.48E-04	3.64E-04	-2.31E-01
Ecotoxicity (freshwater)	CTUe	3.47E+02	2.47E+00	2.73E+01	3.77E+02	2.47E+00	8.34E-01	MNR	MNR	MNR	MNR	MNR	9.24E+03	MNR	MNR	1.06E-01	9.46E-01	2.67E+01	-8.94E+01
Human toxicity, cancer	CTUh	1.09E-08	6.07E-11	4.65E-10	1.14E-08	6.07E-11	3.97E-11	MNR	MNR	MNR	MNR	MNR	8.50E-08	MNR	MNR	2.61E-12	3.62E-11	7.40E-11	-2.66E-10
Human tox. non-cancer	CTUh	2.82E-07	2.45E-09	9.70E-09	2.95E-07	2.45E-09	1.64E-09	MNR	MNR	MNR	MNR	MNR	3.79E-06	MNR	MNR	1.05E-10	1.43E-09	3.29E-09	-1.09E-07
SQP ⁷⁾	-	3.32E+01	3.17E+00	2.16E+01	5.79E+01	3.17E+00	6.90E-02	MNR	MNR	MNR	MNR	MNR	6.78E+02	MNR	MNR	1.36E-01	1.43E-01	9.90E-02	-8.47E+00

6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	8.57E+00	3.10E-02	4.57E+00	1.32E+01	3.10E-02	4.03E-03	MNR	MNR	MNR	MNR	MNR	2.77E+02	MNR	MNR	1.33E-03	1.18E-02	3.26E-03	-7.37E-01
Renew. PER as material	MJ	3.94E-01	0.00E+00	5.34E+00	5.74E+00	0.00E+00	-5.34E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	-3.94E-01	0.00E+00
Total use of renew. PER	MJ	8.96E+00	3.10E-02	9.91E+00	1.89E+01	3.10E-02	-5.34E+00	MNR	MNR	MNR	MNR	MNR	2.77E+02	MNR	MNR	1.33E-03	1.18E-02	-3.91E-01	-7.37E-01
Non-re. PER as energy	MJ	1.09E+02	2.75E+00	9.64E+00	1.21E+02	2.75E+00	1.25E-01	MNR	MNR	MNR	MNR	MNR	2.97E+03	MNR	MNR	1.18E-01	1.19E-01	8.20E-02	-3.87E+01
Non-re. PER as material	MJ	7.50E+00	0.00E+00	5.22E-02	7.55E+00	0.00E+00	-5.22E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-3.74E+00	-3.76E+00	0.00E+00
Total use of non-re. PER	MJ	1.16E+02	2.75E+00	9.69E+00	1.29E+02	2.75E+00	7.25E-02	MNR	MNR	MNR	MNR	MNR	2.97E+03	MNR	MNR	1.18E-01	-3.62E+00	-3.67E+00	-3.87E+01
Secondary materials	kg	3.02E-02	7.63E-04	3.82E-01	4.13E-01	7.63E-04	1.47E-04	MNR	MNR	MNR	MNR	MNR	3.09E-01	MNR	MNR	3.28E-05	1.18E-04	1.62E-04	1.58E-01
Renew. secondary fuels	MJ	6.13E-03	7.70E-06	2.71E-02	3.33E-02	7.70E-06	2.36E-06	MNR	MNR	MNR	MNR	MNR	2.37E-03	MNR	MNR	3.31E-07	5.19E-06	1.86E-06	-1.74E-04
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	5.31E-02	3.56E-04	9.05E-03	6.25E-02	3.56E-04	4.85E-04	MNR	MNR	MNR	MNR	MNR	8.52E-01	MNR	MNR	1.53E-05	4.87E-04	2.57E-04	-1.27E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.59E+00	3.64E-03	5.24E-02	1.65E+00	3.64E-03	1.31E-03	MNR	MNR	MNR	MNR	MNR	4.30E+01	MNR	MNR	1.56E-04	4.76E-04	1.73E-03	-6.14E-01
Non-hazardous waste	kg	1.40E+01	5.99E-02	1.16E+00	1.52E+01	5.99E-02	3.85E-01	MNR	MNR	MNR	MNR	MNR	2.83E+02	MNR	MNR	2.57E-03	1.42E-01	2.26E-01	-1.17E+01
Radioactive waste	kg	1.56E-04	1.84E-05	2.42E-05	1.98E-04	1.84E-05	2.19E-07	MNR	MNR	MNR	MNR	MNR	1.49E-03	MNR	MNR	7.89E-07	2.73E-07	0.00E+00	-8.50E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	2.01E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.30E-01	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	2.04E-01	2.04E-01	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	2.86E+00	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	1.02E+01	1.81E-01	7.75E-01	1.11E+01	1.81E-01	1.54E-02	MNR	MNR	MNR	MNR	MNR	3.26E+02	MNR	MNR	7.78E-03	3.14E-01	1.78E-01	-3.89E+00
Ozone depletion Pot.	kg CFC ₁₁ e	3.05E-07	3.33E-08	4.59E-08	3.85E-07	3.33E-08	1.39E-09	MNR	MNR	MNR	MNR	MNR	1.61E-06	MNR	MNR	1.43E-09	1.06E-09	7.51E-10	-9.03E-08
Acidification	kg SO ₂ e	6.17E-02	6.02E-04	2.92E-03	6.53E-02	6.02E-04	9.16E-05	MNR	MNR	MNR	MNR	MNR	1.47E+00	MNR	MNR	2.58E-05	9.87E-05	4.32E-05	-3.55E-02
Eutrophication	kg PO ₄ ³ e	1.67E-02	1.37E-04	1.79E-03	1.86E-02	1.37E-04	6.86E-05	MNR	MNR	MNR	MNR	MNR	3.26E-01	MNR	MNR	5.89E-06	5.17E-05	4.62E-04	-9.80E-03
POCP ("smog")	kg C ₂ H ₄ e	3.82E-03	2.35E-05	2.05E-04	4.04E-03	2.35E-05	2.83E-06	MNR	MNR	MNR	MNR	MNR	5.46E-02	MNR	MNR	1.01E-06	2.92E-06	2.64E-06	-1.74E-03
ADP-elements	kg Sbe	3.05E-04	4.15E-07	2.81E-06	3.08E-04	4.15E-07	4.09E-08	MNR	MNR	MNR	MNR	MNR	1.00E-03	MNR	MNR	1.78E-08	6.13E-07	1.97E-08	-8.13E-05
ADP-fossil	MJ	1.16E+02	2.75E+00	9.81E+00	1.28E+02	2.75E+00	1.25E-01	MNR	MNR	MNR	MNR	MNR	2.97E+03	MNR	MNR	1.18E-01	1.19E-01	8.20E-02	-3.87E+01

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ Impact = GWP_{case} * TSF$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005774211 CL200 EC RD 20W 40K W HV 06	2300.0	20.0	115.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915005777207 CL202 EC RD 20W 65K W HV 02	1900.0	20.0	95.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002386011 CL200 EC RD 17W 27K W WV 05	1400.0	17.0	82.4	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002386111 CL200 EC RD 17W 65K W WV 05	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002526915 CL200 G3 EC RD 17W 27K W WV TW	1550.0	17.0	91.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002527015 CL200 G3 EC RD 17W 65K W WV TW	1650.0	17.0	97.1	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002059711 CL200 EC RD 20W 65K W WV 05	1900.0	20.0	95.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915005773917 CL200 EC RD 17W 65K W HV 02	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004570801 Cinnabar 2700K ceiling lamp white 17W	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004987201 Cinnabar 4000K ceiling lamp white 17W	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004570801 Cinnabar 2700K ceiling lamp white 17W	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004987201 Cinnabar 4000K ceiling lamp white 17W	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778801 CL200 EC RD 17W 27K W HV 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778861 Moire CL200 RD 17W 27K W HV 06 TP	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778901 CL200 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778961 Moire CL200 RD 17W 40K W HV 06 TP	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778861 Moire CL200 RD 17W 27K W HV 06 TP	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1

915005778961 Moire CL200 RD 17W 40K W HV 06 TP	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778801 CL200 EC RD 17W 27K W HV 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778901 CL200 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778801 CL200 EC RD 17W 27K W HV 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778861 Moire CL200 RD 17W 27K W HV 06 TP	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778901 CL200 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005778961 Moire CL200 RD 17W 40K W HV 06 TP	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002514401 CANOPUS CL259 RD 17W 27K W HV IP44 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002386011 CL200 EC RD 17W 27K W WV 05	1400.0	17.0	82.4	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002386111 CL200 EC RD 17W 65K W WV 05	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002526915 CL200 G3 EC RD 17W 27K W WV TW	1550.0	17.0	91.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002527015 CL200 G3 EC RD 17W 65K W WV TW	1650.0	17.0	97.1	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929003195801 Mauve CL252 PIR RD 16W 27K W HV SR 06	1700.0	16.0	106.2	0.8	0.8	0.6	0.6	0.44	273.6	205.2	205.2	150.5
929003195901 Mauve CL252 PIR RD 16W 40K W HV SR 06	1900.0	16.0	118.8	0.8	0.8	0.6	0.6	0.44	273.6	205.2	205.2	150.5
929002665101 DORIS CL257 EC RD 17W 27K B HV IP44 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002514701 SPRAY CL260 RD 17W 27K S HV IP44 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005776531 SHORE CL202 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002367701 DORIS CL257 EC RD 17W 27K W HV IP44 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002367801 DORIS CL257 EC RD 17W 40K W HV IP44 06	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002367901 DORIS CL257 EC RD 17W 27K N HV IP44 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002368001 DORIS CL257 EC RD 17W 40K N HV IP44 06	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002514201 DORIS CL257 EC RD 17W 27K C HV IP44 06	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929002514301 DORIS CL257 EC RD 17W 40K C HV IP44 06	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004570901 Cinnabar 2700K ceiling lamp white 20W	2000.0	20.0	100.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1

915004987301 Cinnabar 4000k ceiling lamp white 20W	2300.0	20.0	115.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915005774317 CL200 EC RD 20W 65K W HV 02	1900.0	20.0	95.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002598417 CL200 EC RD 24W 65K W HV 02	2100.0	24.0	87.5	1.2	1.2	0.9	0.9	0.66	410.4	307.8	307.8	225.7
915005774211 CL200 EC RD 20W 40K W HV 06	2200.0	20.0	110.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002622101 CL200 EC RD 20W 27K W HV 06	2000.0	20.0	100.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002514501 CANOPUS CL259 RD 20W 27K W HV IP44 06	2000.0	20.0	100.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002059711 CL200 EC RD 20W 65K W WV 05	1900.0	20.0	95.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915005676801 CAVANAL 27K SQ ceiling lamp white 1x18W	1500.0	18.0	83.3	0.9	0.9	0.675	0.675	0.495	307.8	230.9	230.9	169.3
915005676501 CAVANAL 40K ceiling lamp white 18W 230	1600.0	18.0	88.9	0.9	0.9	0.675	0.675	0.495	307.8	230.9	230.9	169.3
915005676601 CAVANAL 27K ceiling lamp white 1x18W 230	1500.0	18.0	83.3	0.9	0.9	0.675	0.675	0.495	307.8	230.9	230.9	169.3
915005774211 CL200 EC RD 20W 40K W HV 06	2300.0	20.0	115.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002622101 CL200 EC RD 20W 27K W HV 06	2000.0	20.0	100.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915005828907 CL254 EC RD 17W 65K W HV 02	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005829107 CL254 EC RD 20W 65K W HV 02	1900.0	20.0	95.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915004571491 Ceiling CL254 17W 2700K white IP20 P	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
929004644591 Ceiling CL254 17W 2700K black IP20 P	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004571401 Twirly 2700K ceiling lamp white 1x17W	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004571501 Twirly 2700K ceiling lamp grey 1x17W 240	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005109501 Twirly 4000K ceiling lamp white 1x17W	1900.0	17.0	111.8	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005828901 CL254 EC RD 17W 65K W HV 03	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005829001 CL254 EC RD 17W 65K S HV 03	1500.0	17.0	88.2	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005829101 CL254 EC RD 20W 65K W HV 03	1900.0	20.0	95.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915005829201 CL254 EC RD 20W 65K S HV 03	1900.0	20.0	95.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915004469101 Suede ceiling lamp white 40K 4x5W	2350.0	24.0	97.9	1.2	1.2	0.9	0.9	0.66	410.4	307.8	307.8	225.7

915005503701 Suede ceiling lamp white 27K 4x5W	2350.0	24.0	97.9	1.2	1.2	0.9	0.9	0.66	410.4	307.8	307.8	225.7
915005315604 WAWEL LED WHT17W TUNABLE ceiling lamp	1600.0	17.0	94.1	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005315604 WAWEL LED WHT17W TUNABLE ceiling lamp	1600.0	17.0	94.1	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915005315707 WAWEL LED WHT20W TUNABLE ceiling lamp	2000.0	20.0	100.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
915005315707 WAWEL LED WHT20W TUNABLE ceiling lamp	2000.0	20.0	100.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929003296203 Nickel 5CCT CL 11in SVR 827-50 Dim 120V	1200.0	16.0	75.0	0.8	0.8	0.6	0.6	0.44	273.6	205.2	205.2	150.5
929003296303 Nickel 5CCT CL 13in SVR 827-50 Dim 120V	1500.0	20.0	75.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002562219 CL261 DS Oyster 15.5W 30-40-65K IP54 ANZ	1400.0	15.5	90.3	0.775	0.775	0.581	0.581	0.426	265.1	198.7	198.7	145.7
929002562319 CL261 DS Oyster 22W 30-40-65K IP54 ANZ	2100.0	22.0	95.5	1.1	1.1	0.825	0.825	0.605	376.2	282.1	282.1	206.9
929003175403 CL Slim Drum 20W 11"x2.4" 50K	1500.0	20.0	75.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929003176403 CL Double Ring 16W 10"x3.4" 30K	1200.0	16.0	75.0	0.8	0.8	0.6	0.6	0.44	273.6	205.2	205.2	150.5
929004096607 CL210 EC RD 24W 65K sparkle HV 02	2400.0	24.0	100.0	1.2	1.2	0.9	0.9	0.66	410.4	307.8	307.8	225.7
929004096707 CL210 EC RD 36W 65K sparkle HV 02	4200.0	36.0	116.7	1.8	1.8	1.35	1.35	0.99	615.6	461.7	461.7	338.6
929004096907 CL610 SS RD 36W 27-40-65K sparkle HV 02	3800.0	36.0	105.6	1.8	1.8	1.35	1.35	0.99	615.6	461.7	461.7	338.6
929004097007 CL610 AIO 24W 27-40-65K sparkle HV RC 02	2550.0	24.0	106.2	1.2	1.2	0.9	0.9	0.66	410.4	307.8	307.8	225.7
929004097107 CL610 AIO 36W 27-40-65K sparkle HV RC 02	3800.0	36.0	105.6	1.8	1.8	1.35	1.35	0.99	615.6	461.7	461.7	338.6
929004096507 CL210 EC RD 36W 65K W HV 02	4200.0	36.0	116.7	1.8	1.8	1.35	1.35	0.99	615.6	461.7	461.7	338.6
929003175403 CL Slim Drum 20W 11"x2.4" 50K	1500.0	20.0	75.0	1.0	1.0	0.75	0.75	0.55	342.0	256.5	256.5	188.1
929002562219 CL261 DS Oyster 15.5W 30-40-65K IP54 ANZ	1400.0	15.5	90.3	0.775	0.775	0.581	0.581	0.426	265.1	198.7	198.7	145.7
929003176403 CL Double Ring 16W 10"x3.4" 30K	1200.0	16.0	75.0	0.8	0.8	0.6	0.6	0.44	273.6	205.2	205.2	150.5
929003313201 Mauve CL270 EC SQ 12W 27K W HV 06	1200.0	12.0	100.0	0.6	0.6	0.45	0.45	0.33	205.2	153.9	153.9	112.9
929003313301 Mauve CL270 EC SQ 12W 40K W HV 06	1300.0	12.0	108.3	0.6	0.6	0.45	0.45	0.33	205.2	153.9	153.9	112.9
915004575602 MAUVE 27K LED CEILING SQ 17W	1700.0	17.0	100.0	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1
915004575603 MAUVE 40K LED CEILING SQ 17W	2000.0	17.0	117.6	0.85	0.85	0.637	0.637	0.468	290.7	217.9	217.9	160.1

** Note that if the product is non-dimmable, only the values for “NC (No Control)” are valid; if the driver type is PSU, only the values for “NC (No Control)” and “PS (presence sensing)” for are valid.*

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor (PGSF), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005774211 CL200 EC RD 20W 40K W HV 06	2300.0	20.0	115.0	1.0	1.014	0.76	0.76	0.558	346.8	259.9	259.9	190.8
915005777207 CL202 EC RD 20W 65K W HV 02	1900.0	20.0	95.0	1.0	1.228	0.921	0.921	0.675	420.0	315.0	315.0	230.9
929002386011 CL200 EC RD 17W 27K W WV 05	1400.0	17.0	82.4	0.85	1.417	1.063	1.063	0.779	484.6	363.5	363.5	266.4
929002386111 CL200 EC RD 17W 65K W WV 05	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
929002526915 CL200 G3 EC RD 17W 27K W WV TW	1550.0	17.0	91.2	0.85	1.279	0.959	0.959	0.703	437.4	328.0	328.0	240.4

929002527015 CL200 G3 EC RD 17W 65K W WV TW	1650.0	17.0	97.1	0.85	1.202	0.901	0.901	0.661	411.1	308.1	308.1	226.1
929002059711 CL200 EC RD 20W 65K W WV 05	1900.0	20.0	95.0	1.0	1.228	0.921	0.921	0.675	420.0	315.0	315.0	230.9
915005773917 CL200 EC RD 17W 65K W HV 02	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
915004570801 Cinnabar 2700K ceiling lamp white 17W	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
915004987201 Cinnabar 4000K ceiling lamp white 17W	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915004570801 Cinnabar 2700K ceiling lamp white 17W	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
915004987201 Cinnabar 4000K ceiling lamp white 17W	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005778801 CL200 EC RD 17W 27K W HV 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005778861 Moire CL200 RD 17W 27K W HV 06 TP	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005778901 CL200 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
915005778961 Moire CL200 RD 17W 40K W HV 06 TP	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
915005778861 Moire CL200 RD 17W 27K W HV 06 TP	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005778961 Moire CL200 RD 17W 40K W HV 06 TP	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
915005778801 CL200 EC RD 17W 27K W HV 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005778901 CL200 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
915005778801 CL200 EC RD 17W 27K W HV 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005778861 Moire CL200 RD 17W 27K W HV 06 TP	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005778901 CL200 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
915005778961 Moire CL200 RD 17W 40K W HV 06 TP	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
929002514401 CANOPUS CL259 RD 17W 27K W HV IP44 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929002386011 CL200 EC RD 17W 27K W WV 05	1400.0	17.0	82.4	0.85	1.417	1.063	1.063	0.779	484.6	363.5	363.5	266.4
929002386111 CL200 EC RD 17W 65K W WV 05	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
929002526915 CL200 G3 EC RD 17W 27K W WV TW	1550.0	17.0	91.2	0.85	1.279	0.959	0.959	0.703	437.4	328.0	328.0	240.4
929002527015 CL200 G3 EC RD 17W 65K W WV TW	1650.0	17.0	97.1	0.85	1.202	0.901	0.901	0.661	411.1	308.1	308.1	226.1

929003195801 Mauve CL252 PIR RD 16W 27K W HV SR 06	1700.0	16.0	106.2	0.8	1.098	0.824	0.824	0.604	375.5	281.8	281.8	206.6
929003195901 Mauve CL252 PIR RD 16W 40K W HV SR 06	1900.0	16.0	118.8	0.8	0.982	0.736	0.736	0.54	335.8	251.7	251.7	184.7
929002665101 DORIS CL257 EC RD 17W 27K B HV IP44 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929002514701 SPRAY CL260 RD 17W 27K S HV IP44 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005776531 SHORE CL202 EC RD 17W 40K W HV 06	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
929002367701 DORIS CL257 EC RD 17W 27K W HV IP44 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929002367801 DORIS CL257 EC RD 17W 40K W HV IP44 06	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
929002367901 DORIS CL257 EC RD 17W 27K N HV IP44 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929002368001 DORIS CL257 EC RD 17W 40K N HV IP44 06	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
929002514201 DORIS CL257 EC RD 17W 27K C HV IP44 06	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929002514301 DORIS CL257 EC RD 17W 40K C HV IP44 06	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
915004570901 Cinnabar 2700K ceiling lamp white 20W	2000.0	20.0	100.0	1.0	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915004987301 Cinnabar 4000k ceiling lamp white 20W	2300.0	20.0	115.0	1.0	1.014	0.76	0.76	0.558	346.8	259.9	259.9	190.8
915005774317 CL200 EC RD 20W 65K W HV 02	1900.0	20.0	95.0	1.0	1.228	0.921	0.921	0.675	420.0	315.0	315.0	230.9
929002598417 CL200 EC RD 24W 65K W HV 02	2100.0	24.0	87.5	1.2	1.333	1.0	1.0	0.733	455.9	342.0	342.0	250.7
915005774211 CL200 EC RD 20W 40K W HV 06	2200.0	20.0	110.0	1.0	1.061	0.796	0.796	0.584	362.9	272.2	272.2	199.7
929002622101 CL200 EC RD 20W 27K W HV 06	2000.0	20.0	100.0	1.0	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929002514501 CANOPUS CL259 RD 20W 27K W HV IP44 06	2000.0	20.0	100.0	1.0	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929002059711 CL200 EC RD 20W 65K W WV 05	1900.0	20.0	95.0	1.0	1.228	0.921	0.921	0.675	420.0	315.0	315.0	230.9
915005676801 CAVANAL 27K SQ ceiling lamp white 1x18W	1500.0	18.0	83.3	0.9	1.4	1.05	1.05	0.77	478.8	359.1	359.1	263.3
915005676501 CAVANAL 40K ceiling lamp white 18W 230	1600.0	18.0	88.9	0.9	1.312	0.984	0.984	0.722	448.7	336.5	336.5	246.9
915005676601 CAVANAL 27K ceiling lamp white 1x18W 230	1500.0	18.0	83.3	0.9	1.4	1.05	1.05	0.77	478.8	359.1	359.1	263.3
915005774211 CL200 EC RD 20W 40K W HV 06	2300.0	20.0	115.0	1.0	1.014	0.76	0.76	0.558	346.8	259.9	259.9	190.8
929002622101 CL200 EC RD 20W 27K W HV 06	2000.0	20.0	100.0	1.0	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6

915005828907 CL254 EC RD 17W 65K W HV 02	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
915005829107 CL254 EC RD 20W 65K W HV 02	1900.0	20.0	95.0	1.0	1.228	0.921	0.921	0.675	420.0	315.0	315.0	230.9
915004571491 Ceiling CL254 17W 2700K white IP20 P	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929004644591 Ceiling CL254 17W 2700K black IP20 P	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915004571401 Twirly 2700K ceiling lamp white 1x17W	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915004571501 Twirly 2700K ceiling lamp grey 1x17W 240	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005109501 Twirly 4000K ceiling lamp white 1x17W	1900.0	17.0	111.8	0.85	1.044	0.783	0.783	0.574	357.0	267.8	267.8	196.3
915005828901 CL254 EC RD 17W 65K W HV 03	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
915005829001 CL254 EC RD 17W 65K S HV 03	1500.0	17.0	88.2	0.85	1.323	0.992	0.992	0.728	452.5	339.3	339.3	249.0
915005829101 CL254 EC RD 20W 65K W HV 03	1900.0	20.0	95.0	1.0	1.228	0.921	0.921	0.675	420.0	315.0	315.0	230.9
915005829201 CL254 EC RD 20W 65K S HV 03	1900.0	20.0	95.0	1.0	1.228	0.921	0.921	0.675	420.0	315.0	315.0	230.9
915004469101 Suede ceiling lamp white 40K 4x5W	2350.0	24.0	97.9	1.2	1.192	0.894	0.894	0.656	407.7	305.7	305.7	224.4
915005503701 Suede ceiling lamp white 27K 4x5W	2350.0	24.0	97.9	1.2	1.192	0.894	0.894	0.656	407.7	305.7	305.7	224.4
915005315604 WAWEL LED WHT17W TUNABLE ceiling lamp	1600.0	17.0	94.1	0.85	1.239	0.929	0.929	0.681	423.7	317.7	317.7	232.9
915005315604 WAWEL LED WHT17W TUNABLE ceiling lamp	1600.0	17.0	94.1	0.85	1.239	0.929	0.929	0.681	423.7	317.7	317.7	232.9
915005315707 WAWEL LED WHT20W TUNABLE ceiling lamp	2000.0	20.0	100.0	1.0	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915005315707 WAWEL LED WHT20W TUNABLE ceiling lamp	2000.0	20.0	100.0	1.0	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
929003296203 Nickel 5CCT CL 11in SVR 827-50 Dim 120V	1200.0	16.0	75.0	0.8	1.555	1.166	1.166	0.855	531.8	398.8	398.8	292.4
929003296303 Nickel 5CCT CL 13in SVR 827-50 Dim 120V	1500.0	20.0	75.0	1.0	1.556	1.167	1.167	0.856	532.2	399.1	399.1	292.8
929002562219 CL261 DS Oyster 15.5W 30-40-65K IP54 ANZ	1400.0	15.5	90.3	0.775	1.292	0.969	0.969	0.711	441.9	331.4	331.4	243.2
929002562319 CL261 DS Oyster 22W 30-40-65K IP54 ANZ	2100.0	22.0	95.5	1.1	1.222	0.916	0.916	0.672	417.9	313.3	313.3	229.8
929003175403 CL Slim Drum 20W 11"x2.4" 50K	1500.0	20.0	75.0	1.0	1.556	1.167	1.167	0.856	532.2	399.1	399.1	292.8
929003176403 CL Double Ring 16W 10"x3.4" 30K	1200.0	16.0	75.0	0.8	1.555	1.166	1.166	0.855	531.8	398.8	398.8	292.4
929004096607 CL210 EC RD 24W 65K sparkle HV 02	2400.0	24.0	100.0	1.2	1.166	0.874	0.874	0.641	398.8	298.9	298.9	219.2

929004096707 CL210 EC RD 36W 65K sparkle HV 02	4200.0	36.0	116.7	1.8	1.001	0.751	0.751	0.551	342.3	256.8	256.8	188.4
929004096907 CL610 SS RD 36W 27-40-65K sparkle HV 02	3800.0	36.0	105.6	1.8	1.105	0.829	0.829	0.608	377.9	283.5	283.5	207.9
929004097007 CL610 AIO 24W 27-40-65K sparkle HV RC 02	2550.0	24.0	106.2	1.2	1.098	0.824	0.824	0.604	375.5	281.8	281.8	206.6
929004097107 CL610 AIO 36W 27-40-65K sparkle HV RC 02	3800.0	36.0	105.6	1.8	1.105	0.829	0.829	0.608	377.9	283.5	283.5	207.9
929004096507 CL210 EC RD 36W 65K W HV 02	4200.0	36.0	116.7	1.8	1.001	0.751	0.751	0.551	342.3	256.8	256.8	188.4
929003175403 CL Slim Drum 20W 11"x2.4" 50K	1500.0	20.0	75.0	1.0	1.556	1.167	1.167	0.856	532.2	399.1	399.1	292.8
929002562219 CL261 DS Oyster 15.5W 30-40-65K IP54 ANZ	1400.0	15.5	90.3	0.775	1.292	0.969	0.969	0.711	441.9	331.4	331.4	243.2
929003176403 CL Double Ring 16W 10"x3.4" 30K	1200.0	16.0	75.0	0.8	1.555	1.166	1.166	0.855	531.8	398.8	398.8	292.4
929003313201 Mauve CL270 EC SQ 12W 27K W HV 06	1200.0	12.0	100.0	0.6	1.166	0.874	0.874	0.641	398.8	298.9	298.9	219.2
929003313301 Mauve CL270 EC SQ 12W 40K W HV 06	1300.0	12.0	108.3	0.6	1.077	0.808	0.808	0.592	368.3	276.3	276.3	202.5
915004575602 MAUVE 27K LED CEILING SQ 17W	1700.0	17.0	100.0	0.85	1.167	0.875	0.875	0.642	399.1	299.2	299.2	219.6
915004575603 MAUVE 40K LED CEILING SQ 17W	2000.0	17.0	117.6	0.85	0.992	0.744	0.744	0.546	339.3	254.4	254.4	186.7

*** Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.*

ANNEX

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

The table in this annex is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

This EPD was done according to a specific customer use location that can be read in the paragraph **PRODUCT USE AND MAINTENANCE (B1-B7)**.

If for example the EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	5,88E+00	2,61E-01	-1,25E-01	6,02E+00	3,02E-01	5,41E-01	MND	MND	MND	MND	MND	4,06E+02	MND	MNR	1,77E-02	2,62E-01	1,88E-01	-1,09E+01

Divide that value according to the EU value from the following table (EU = 3,96E-01) and then multiplying for the Finland value from the same table (FINLAND = 2,70E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = $(4,06E+02 / 3,96E-01) \times 2,70E-01 = 2,76 E+02$

Country	GWP tot (kg CO2 eq. per kwh)
AUSTRALIA	9,59E-01
AUSTRIA	3,37E-01
BELGIUM	2,63E-01
CHINA	1,14E+00
DENMARK	2,91E-01
EU	3,96E-01
FINLAND	2,70E-01
FRANCE	8,77E-02
GERMANY	5,32E-01
HUNGARY	4,67E-01
IRELAND	4,26E-01
ITALY	3,94E-01
LATAM	3,50E-01
NAM	4,83E-01
NETHERLANDS	5,88E-01
NORWAY	2,59E-02

POLAND	1,05E+00
PORTUGAL	4,22E-01
ROW	7,32E-01
SPAIN	3,34E-01
SWEDEN	4,95E-02
SWITZERLAND	5,38E-02
UK	3,17E-01

Source Ecoinvent 3.8