



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Meson downlight

Meson 5-8inch

Signify N.V.



Signify

The Signify logo consists of the word "Signify" in a green sans-serif font. A green circle containing a white lowercase letter "s" is positioned to the left of the "S".

EPD HUB

Publishing date 2024-07-15

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	Meson downlight
Additional labels	Meson 5-8inch
Product reference	929003287402
Place of production	China
Period for data	2024
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	0.13 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	2.63E+00
GWP-total, A1-A3 (kgCO ₂ e)	2.53E+00
Secondary material, inputs (%)	4.5
Secondary material, outputs (%)	20.6
Total energy use, A1-A3 (kWh)	10.2
Net fresh water use, A1-A3 (m ³ e)	-0.01

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT DESCRIPTION

Meson downlight is the value range downlight equipped with Eyecomfort feature, it delivers bright and even light, the design is very compact for ease of installation.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	23.17	APAC
Minerals	0	Not applicable
Fossil materials	76.83	APAC
Bio-based materials	0	Not applicable

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
--	---

Biogenic carbon content in packaging, kg C	0.024
--	-------

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	0.13 kg
Functional unit	1400 Lumens over 15000 hours
Reference service life	15000 hours

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage		Assembly stage		Use stage							End of life stage				Beyond the system boundaries			
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify's manufacturing facilities are included in this stage. The product is made of metals, plastics, and electronic components. All components are transported to Signify's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the

waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from APAC's electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY

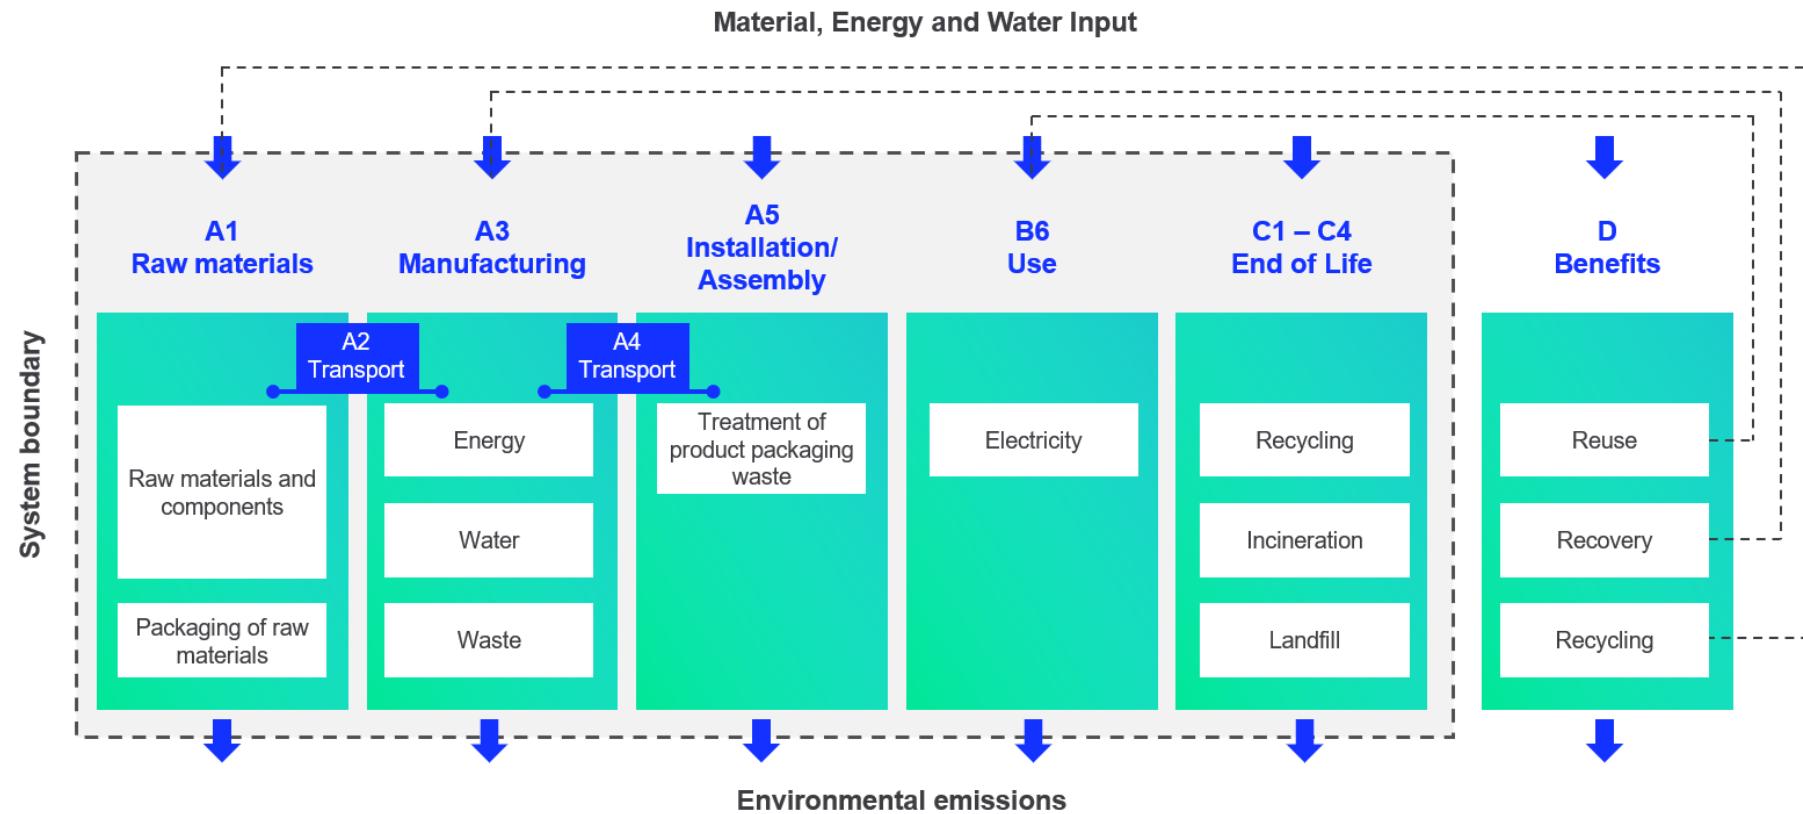

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	2.38E+00	3.53E-02	1.15E-01	2.53E+00	3.53E-02	8.80E-02	MNR	MNR	MNR	MNR	MNR	3.38E+02	MNR	MNR	7.67E-04	9.84E-02	6.57E-02	-3.69E-01
GWP – fossil	kg CO ₂ e	2.39E+00	3.53E-02	2.00E-01	2.63E+00	3.53E-02	2.23E-03	MNR	MNR	MNR	MNR	MNR	3.38E+02	MNR	MNR	7.67E-04	9.84E-02	5.19E-02	-3.69E-01
GWP – biogenic	kg CO ₂ e	-1.38E-02	0.00E+00	-8.57E-02	-9.95E-02	1.36E-05	8.57E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	1.38E-02	4.42E-04
GWP – LULUC	kg CO ₂ e	3.65E-03	1.30E-05	4.12E-04	4.08E-03	1.30E-05	7.65E-07	MNR	MNR	MNR	MNR	MNR	4.42E-02	MNR	MNR	2.83E-07	3.07E-06	1.23E-06	-9.67E-05
Ozone depletion pot.	kg CFC-11e	1.39E-07	8.12E-09	9.90E-09	1.57E-07	8.12E-09	2.25E-10	MNR	MNR	MNR	MNR	MNR	2.86E-06	MNR	MNR	1.76E-10	3.03E-10	2.32E-10	-8.33E-09
Acidification potential	mol H ⁺ e	1.94E-02	1.49E-04	1.07E-03	2.06E-02	1.49E-04	1.75E-05	MNR	MNR	MNR	MNR	MNR	1.71E+00	MNR	MNR	3.25E-06	3.18E-05	1.55E-05	-4.14E-03
EP-freshwater ²⁾	kg Pe	2.56E-04	2.89E-07	4.13E-05	2.98E-04	2.89E-07	2.35E-08	MNR	MNR	MNR	MNR	MNR	1.38E-02	MNR	MNR	6.28E-09	7.47E-08	2.62E-08	-2.05E-05
EP-marine	kg Ne	2.84E-03	4.44E-05	1.07E-03	3.96E-03	4.44E-05	7.41E-06	MNR	MNR	MNR	MNR	MNR	3.33E-01	MNR	MNR	9.65E-07	1.29E-05	7.93E-06	-3.91E-04
EP-terrestrial	mol Ne	3.17E-02	4.90E-04	2.78E-03	3.49E-02	4.90E-04	7.70E-05	MNR	MNR	MNR	MNR	MNR	3.72E+00	MNR	MNR	1.06E-05	1.33E-04	6.78E-05	-4.61E-03
POCP ("smog") ³⁾	kg NMVOCe	1.03E-02	1.57E-04	6.34E-04	1.11E-02	1.57E-04	1.92E-05	MNR	MNR	MNR	MNR	MNR	9.72E-01	MNR	MNR	3.41E-06	3.39E-05	1.79E-05	-1.38E-03
ADP-minerals & metals ⁴⁾	kg Sbe	4.58E-04	8.27E-08	6.47E-07	4.59E-04	8.27E-08	7.41E-09	MNR	MNR	MNR	MNR	MNR	1.11E-03	MNR	MNR	1.80E-09	7.07E-08	6.13E-09	-3.75E-05
ADP-fossil resources	MJ	3.37E+01	5.30E-01	2.19E+00	3.64E+01	5.30E-01	1.74E-02	MNR	MNR	MNR	MNR	MNR	3.38E+03	MNR	MNR	1.15E-02	3.01E-02	1.99E-02	-4.27E+00
Water use ⁵⁾	m ³ e depr.	8.84E-01	2.37E-03	2.11E-01	1.10E+00	2.37E-03	4.13E-03	MNR	MNR	MNR	MNR	MNR	3.93E+01	MNR	MNR	5.15E-05	4.17E-03	2.25E-03	-6.07E-02

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1.51E-07	4.07E-09	1.67E-08	1.71E-07	4.07E-09	1.63E-10	MNR	MNR	MNR	MNR	MNR	1.77E-05	MNR	MNR	8.84E-11	7.93E-10	1.42E-10	-2.86E-08
Ionizing radiation ⁶⁾	kBq U235e	2.22E-01	2.52E-03	5.31E-03	2.30E-01	2.52E-03	6.33E-05	MNR	MNR	MNR	MNR	MNR	1.22E+01	MNR	MNR	5.49E-05	1.27E-04	8.30E-05	-1.86E-02
Ecotoxicity (freshwater)	CTUe	2.12E+02	4.77E-01	2.10E+01	2.33E+02	4.77E-01	1.21E-01	MNR	MNR	MNR	MNR	MNR	8.37E+03	MNR	MNR	1.04E-02	2.81E-01	3.58E+00	-1.63E+01
Human toxicity, cancer	CTUh	3.98E-09	1.17E-11	2.12E-10	4.21E-09	1.17E-11	5.40E-12	MNR	MNR	MNR	MNR	MNR	9.23E-08	MNR	MNR	2.55E-13	1.55E-11	2.77E-11	-2.32E-10
Human tox. non-cancer	CTUh	9.58E-08	4.72E-10	5.65E-09	1.02E-07	4.72E-10	2.25E-10	MNR	MNR	MNR	MNR	MNR	3.95E-06	MNR	MNR	1.03E-11	3.95E-10	1.74E-09	-2.56E-08
SQP ⁷⁾	-	1.14E+01	6.11E-01	2.73E+00	1.48E+01	6.11E-01	9.47E-03	MNR	MNR	MNR	MNR	MNR	6.79E+02	MNR	MNR	1.33E-02	3.02E-02	2.46E-02	-1.39E+00

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	3.03E+00	5.97E-03	5.52E-01	3.59E+00	5.97E-03	5.78E-04	MNR	MNR	MNR	MNR	MNR	2.89E+02	MNR	MNR	1.30E-04	2.20E-03	7.01E-04	-1.95E-01
Renew. PER as material	MJ	3.29E-01	0.00E+00	7.50E-01	1.08E+00	0.00E+00	-7.50E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-7.06E-02	-2.59E-01	0.00E+00
Total use of renew. PER	MJ	3.36E+00	5.97E-03	1.30E+00	4.67E+00	5.97E-03	-7.50E-01	MNR	MNR	MNR	MNR	MNR	2.89E+02	MNR	MNR	1.30E-04	-6.84E-02	-2.58E-01	-1.95E-01
Non-re. PER as energy	MJ	3.04E+01	5.30E-01	2.15E+00	3.31E+01	5.30E-01	1.74E-02	MNR	MNR	MNR	MNR	MNR	3.38E+03	MNR	MNR	1.15E-02	3.01E-02	1.99E-02	-3.74E+00
Non-re. PER as material	MJ	3.42E+00	0.00E+00	6.09E-03	3.43E+00	0.00E+00	-6.09E-03	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-1.92E+00	-1.51E+00	1.01E+00
Total use of non-re. PER	MJ	3.38E+01	5.30E-01	2.16E+00	3.65E+01	5.30E-01	1.13E-02	MNR	MNR	MNR	MNR	MNR	3.38E+03	MNR	MNR	1.15E-02	-1.89E+00	-1.49E+00	-2.73E+00
Secondary materials	kg	2.37E-02	1.47E-04	5.94E-02	8.33E-02	1.47E-04	2.08E-05	MNR	MNR	MNR	MNR	MNR	3.29E-01	MNR	MNR	3.20E-06	6.78E-05	3.01E-05	3.16E-02
Renew. secondary fuels	MJ	2.01E-03	1.48E-06	4.16E-03	6.18E-03	1.48E-06	3.47E-07	MNR	MNR	MNR	MNR	MNR	2.70E-03	MNR	MNR	3.23E-08	1.23E-06	4.64E-07	-7.46E-05
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	2.20E-02	6.86E-05	-3.34E-02	-1.14E-02	6.86E-05	7.35E-05	MNR	MNR	MNR	MNR	MNR	9.35E-01	MNR	MNR	1.49E-06	1.50E-04	7.89E-05	-2.06E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	2.85E-01	7.03E-04	1.90E-02	3.05E-01	7.03E-04	5.49E-06	MNR	MNR	MNR	MNR	MNR	3.68E+01	MNR	MNR	1.53E-05	1.84E-04	1.01E-03	-4.37E-02
Non-hazardous waste	kg	4.85E+00	1.15E-02	1.71E-01	5.03E+00	1.15E-02	5.89E-02	MNR	MNR	MNR	MNR	MNR	5.63E+02	MNR	MNR	2.51E-04	4.30E-02	5.67E-02	-1.14E+00
Radioactive waste	kg	7.12E-05	3.55E-06	2.82E-06	7.76E-05	3.55E-06	2.77E-08	MNR	MNR	MNR	MNR	MNR	3.48E-03	MNR	MNR	7.71E-08	4.46E-08	0.00E+00	-6.88E-06

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.62E-02	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.06E-02	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	4.20E-02	4.20E-02	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	9.83E-01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	2.34E+00	3.49E-02	1.99E-01	2.58E+00	3.49E-02	2.14E-03	MNR	MNR	MNR	MNR	MNR	3.26E+02	MNR	MNR	7.59E-04	9.83E-02	5.12E-02	-3.59E-01
Ozone depletion Pot.	kg CFC-11e	1.29E-07	6.43E-09	8.33E-09	1.44E-07	6.43E-09	1.97E-10	MNR	MNR	MNR	MNR	MNR	2.47E-06	MNR	MNR	1.40E-10	2.67E-10	1.95E-10	-7.03E-09
Acidification	kg SO ₂ e	1.63E-02	1.16E-04	8.23E-04	1.72E-02	1.16E-04	1.28E-05	MNR	MNR	MNR	MNR	MNR	1.41E+00	MNR	MNR	2.52E-06	2.34E-05	1.13E-05	-3.59E-03
Eutrophication	kg PO ₄ ³⁻ e	7.94E-03	2.64E-05	7.89E-04	8.75E-03	2.64E-05	9.52E-06	MNR	MNR	MNR	MNR	MNR	4.96E-01	MNR	MNR	5.75E-07	2.98E-05	1.46E-04	-8.64E-04
POCP ("smog")	kg C ₂ H ₄ e	1.44E-03	4.53E-06	3.81E-05	1.49E-03	4.53E-06	4.02E-07	MNR	MNR	MNR	MNR	MNR	5.29E-02	MNR	MNR	9.85E-08	9.75E-07	7.74E-07	-1.66E-04
ADP-elements	kg Sbe	4.58E-04	8.01E-08	5.73E-07	4.58E-04	8.01E-08	5.81E-09	MNR	MNR	MNR	MNR	MNR	1.11E-03	MNR	MNR	1.74E-09	6.87E-08	5.09E-09	-3.74E-05
ADP-fossil	MJ	3.35E+01	5.30E-01	2.18E+00	3.62E+01	5.30E-01	1.74E-02	MNR	MNR	MNR	MNR	MNR	3.38E+03	MNR	MNR	1.15E-02	3.01E-02	1.99E-02	-4.26E+00

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in question P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according to the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
929003240807	980.0	13.0	75.4	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003269209	700.0	9.0	77.8	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003269309	750.0	9.0	83.3	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003269409	750.0	9.0	83.3	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003276749	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276507	900.0	13.0	69.2	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276707	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003282507	900.0	13.0	69.2	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003282707	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276549	900.0	13.0	69.2	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276328	700.0	9.0	77.8	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003276428	700.0	9.0	77.8	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003276228	650.0	9.0	72.2	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003276528	900.0	13.0	69.2	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276628	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276728	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276501	900.0	12.5	72.0	0.595	0.595	0.446	0.446	0.327	201.1	150.7	150.7	110.5

929003276601	960.0	12.5	76.8	0.595	0.595	0.446	0.446	0.327	201.1	150.7	150.7	110.5
929003276701	960.0	12.5	76.8	0.595	0.595	0.446	0.446	0.327	201.1	150.7	150.7	110.5
929003282601	960.0	12.5	76.8	0.595	0.595	0.446	0.446	0.327	201.1	150.7	150.7	110.5
929003282701	960.0	12.5	76.8	0.595	0.595	0.446	0.446	0.327	201.1	150.7	150.7	110.5
929003282501	900.0	12.5	72.0	0.595	0.595	0.446	0.446	0.327	201.1	150.7	150.7	110.5
929003286802	900.0	13.0	69.2	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003286902	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003287002	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003282508	900.0	13.0	69.2	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003282608	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003282708	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003240823	980.0	13.0	75.4	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276623	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003276638	960.0	13.0	73.8	0.619	0.619	0.464	0.464	0.34	209.2	156.8	156.8	114.9
929003240907	1280.0	17.0	75.3	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003282807	1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003283007	1280.0	17.0	75.3	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003276807	1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003277007	1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003276849	1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003277049	1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003276828	1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003276928	1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003277028	1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7

929003276801		1200.0	16.5	72.7	0.786	0.786	0.59	0.59	0.432	265.7	199.4	199.4	146.0
929003276901		1300.0	16.5	78.8	0.786	0.786	0.59	0.59	0.432	265.7	199.4	199.4	146.0
929003277001		1300.0	16.5	78.8	0.786	0.786	0.59	0.59	0.432	265.7	199.4	199.4	146.0
929003282801		1200.0	16.5	72.7	0.786	0.786	0.59	0.59	0.432	265.7	199.4	199.4	146.0
929003282901		1280.0	16.5	77.6	0.786	0.786	0.59	0.59	0.432	265.7	199.4	199.4	146.0
929003283001		1280.0	16.5	77.6	0.786	0.786	0.59	0.59	0.432	265.7	199.4	199.4	146.0
929003335922		1200.0	15.0	80.0	0.714	0.714	0.535	0.535	0.393	241.3	180.8	180.8	132.8
929003336022		1300.0	15.0	86.7	0.714	0.714	0.535	0.535	0.393	241.3	180.8	180.8	132.8
929003336122		1300.0	15.0	86.7	0.714	0.714	0.535	0.535	0.393	241.3	180.8	180.8	132.8
929003304708		1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003304808		1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003304908		1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003287102		1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003287202		1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003287302		1300.0	17.0	76.5	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003282808		1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003282908		1280.0	17.0	75.3	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003283008		1280.0	17.0	75.3	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003240923		1280.0	17.0	75.3	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003276823		1200.0	15.5	77.4	0.738	0.738	0.553	0.553	0.406	249.4	186.9	186.9	137.2
929003276838		1200.0	15.5	77.4	0.738	0.738	0.553	0.553	0.406	249.4	186.9	186.9	137.2
929003277023		1300.0	15.5	83.9	0.738	0.738	0.553	0.553	0.406	249.4	186.9	186.9	137.2
929003277038		1300.0	15.5	83.9	0.738	0.738	0.553	0.553	0.406	249.4	186.9	186.9	137.2
929003282823		1200.0	15.5	77.4	0.738	0.738	0.553	0.553	0.406	249.4	186.9	186.9	137.2

929003282807	1200.0	17.0	70.6	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003283023	1280.0	15.5	82.6	0.738	0.738	0.553	0.553	0.406	249.4	186.9	186.9	137.2
929003283007	1280.0	17.0	75.3	0.81	0.81	0.608	0.608	0.446	273.8	205.5	205.5	150.7
929003277107	1400.0	21.0	66.7	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003277307	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003277349	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003277128	1400.0	21.0	66.7	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003277228	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003277328	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003326601	1400.0	20.0	70.0	0.952	0.952	0.714	0.714	0.524	321.8	241.3	241.3	177.1
929003326701	1500.0	20.0	75.0	0.952	0.952	0.714	0.714	0.524	321.8	241.3	241.3	177.1
929003326801	1500.0	20.0	75.0	0.952	0.952	0.714	0.714	0.524	321.8	241.3	241.3	177.1
929003305008	1400.0	21.0	66.7	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003305108	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003305208	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003287402	1400.0	21.0	66.7	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003287502	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003287602	1500.0	21.0	71.4	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003277123	1400.0	19.0	73.7	0.905	0.905	0.679	0.679	0.498	305.9	229.5	229.5	168.3
929003277323	1500.0	19.0	78.9	0.905	0.905	0.679	0.679	0.498	305.9	229.5	229.5	168.3
929003277338	1500.0	19.0	78.9	0.905	0.905	0.679	0.679	0.498	305.9	229.5	229.5	168.3
929003277407	1750.0	24.0	72.9	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003277607	1900.0	24.0	79.2	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003277649	1900.0	24.0	79.2	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6

929003277428		1750.0	24.0	72.9	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003277528		1900.0	24.0	79.2	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003277628		1900.0	24.0	79.2	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003326901		1750.0	23.5	74.5	1.119	1.119	0.839	0.839	0.615	378.2	283.6	283.6	207.9
929003327001		1900.0	23.5	80.9	1.119	1.119	0.839	0.839	0.615	378.2	283.6	283.6	207.9
929003327101		1900.0	23.5	80.9	1.119	1.119	0.839	0.839	0.615	378.2	283.6	283.6	207.9
929003327031		1900.0	23.5	80.9	1.119	1.119	0.839	0.839	0.615	378.2	283.6	283.6	207.9
929003336222		1750.0	21.0	83.3	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003336322		1900.0	21.0	90.5	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003336422		1900.0	21.0	90.5	1.0	1.0	0.75	0.75	0.55	338.0	253.5	253.5	185.9
929003305308		1700.0	24.0	70.8	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003305408		1820.0	24.0	75.8	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003305508		1820.0	24.0	75.8	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003287702		1700.0	24.0	70.8	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003287802		1820.0	24.0	75.8	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003287902		1820.0	24.0	75.8	1.143	1.143	0.857	0.857	0.629	386.3	289.7	289.7	212.6
929003277423		1750.0	21.5	81.4	1.024	1.024	0.768	0.768	0.563	346.1	259.6	259.6	190.3
929003277623		1900.0	21.5	88.4	1.024	1.024	0.768	0.768	0.563	346.1	259.6	259.6	190.3
929003277638		1900.0	21.5	88.4	1.024	1.024	0.768	0.768	0.563	346.1	259.6	259.6	190.3
929003282207		600.0	9.0	66.7	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003282407		640.0	9.0	71.1	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003282208		600.0	9.0	66.7	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003282308		640.0	9.0	71.1	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003282408		640.0	9.0	71.1	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8

929003282207	600.0	9.0	66.7	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003282223	600.0	8.5	70.6	0.405	0.405	0.304	0.304	0.223	136.9	102.8	102.8	75.4
929003282423	640.0	8.5	75.3	0.405	0.405	0.304	0.304	0.223	136.9	102.8	102.8	75.4
929003282407	640.0	9.0	71.1	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003240707	630.0	9.0	70.0	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8
929003240723	630.0	9.0	70.0	0.429	0.429	0.322	0.322	0.236	145.0	108.8	108.8	79.8

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" are valid.

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in question P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminaire (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor (PGSF), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled GWP} = \text{GWP}_{\text{case}} * \text{TSF}$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
929003240807	980.0	13.0	75.4	0.619	1.474	1.105	1.105	0.811	498.2	373.5	373.5	274.1
929003269209	700.0	9.0	77.8	0.429	1.43	1.073	1.073	0.786	483.3	362.7	362.7	265.7
929003269309	750.0	9.0	83.3	0.429	1.335	1.001	1.001	0.734	451.2	338.3	338.3	248.1
929003269409	750.0	9.0	83.3	0.429	1.335	1.001	1.001	0.734	451.2	338.3	338.3	248.1
929003276749	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9

929003276507	900.0	13.0	69.2	0.619	1.605	1.204	1.204	0.883	542.5	407.0	407.0	298.5
929003276707	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003282507	900.0	13.0	69.2	0.619	1.605	1.204	1.204	0.883	542.5	407.0	407.0	298.5
929003282707	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003276549	900.0	13.0	69.2	0.619	1.605	1.204	1.204	0.883	542.5	407.0	407.0	298.5
929003276328	700.0	9.0	77.8	0.429	1.43	1.073	1.073	0.786	483.3	362.7	362.7	265.7
929003276428	700.0	9.0	77.8	0.429	1.43	1.073	1.073	0.786	483.3	362.7	362.7	265.7
929003276228	650.0	9.0	72.2	0.429	1.54	1.155	1.155	0.847	520.5	390.4	390.4	286.3
929003276528	900.0	13.0	69.2	0.619	1.605	1.204	1.204	0.883	542.5	407.0	407.0	298.5
929003276628	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003276728	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003276501	900.0	12.5	72.0	0.595	1.543	1.157	1.157	0.849	521.5	391.1	391.1	287.0
929003276601	960.0	12.5	76.8	0.595	1.446	1.085	1.085	0.795	488.7	366.7	366.7	268.7
929003276701	960.0	12.5	76.8	0.595	1.446	1.085	1.085	0.795	488.7	366.7	366.7	268.7
929003282601	960.0	12.5	76.8	0.595	1.446	1.085	1.085	0.795	488.7	366.7	366.7	268.7
929003282701	960.0	12.5	76.8	0.595	1.446	1.085	1.085	0.795	488.7	366.7	366.7	268.7
929003282501	900.0	12.5	72.0	0.595	1.543	1.157	1.157	0.849	521.5	391.1	391.1	287.0
929003286802	900.0	13.0	69.2	0.619	1.605	1.204	1.204	0.883	542.5	407.0	407.0	298.5
929003286902	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003287002	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003282508	900.0	13.0	69.2	0.619	1.605	1.204	1.204	0.883	542.5	407.0	407.0	298.5
929003282608	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003282708	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003240823	980.0	13.0	75.4	0.619	1.474	1.105	1.105	0.811	498.2	373.5	373.5	274.1

929003276623	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003276638	960.0	13.0	73.8	0.619	1.505	1.129	1.129	0.828	508.7	381.6	381.6	279.9
929003240907	1280.0	17.0	75.3	0.81	1.477	1.108	1.108	0.812	499.2	374.5	374.5	274.5
929003282807	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003283007	1280.0	17.0	75.3	0.81	1.477	1.108	1.108	0.812	499.2	374.5	374.5	274.5
929003276807	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003277007	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4
929003276849	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003277049	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4
929003276828	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003276928	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4
929003277028	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4
929003276801	1200.0	16.5	72.7	0.786	1.528	1.146	1.146	0.84	516.5	387.3	387.3	283.9
929003276901	1300.0	16.5	78.8	0.786	1.411	1.058	1.058	0.776	476.9	357.6	357.6	262.3
929003277001	1300.0	16.5	78.8	0.786	1.411	1.058	1.058	0.776	476.9	357.6	357.6	262.3
929003282801	1200.0	16.5	72.7	0.786	1.528	1.146	1.146	0.84	516.5	387.3	387.3	283.9
929003282901	1280.0	16.5	77.6	0.786	1.433	1.075	1.075	0.788	484.4	363.3	363.3	266.3
929003283001	1280.0	16.5	77.6	0.786	1.433	1.075	1.075	0.788	484.4	363.3	363.3	266.3
929003335922	1200.0	15.0	80.0	0.714	1.388	1.041	1.041	0.763	469.1	351.9	351.9	257.9
929003336022	1300.0	15.0	86.7	0.714	1.282	0.962	0.962	0.705	433.3	325.2	325.2	238.3
929003336122	1300.0	15.0	86.7	0.714	1.282	0.962	0.962	0.705	433.3	325.2	325.2	238.3
929003304708	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003304808	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4
929003304908	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4

929003287102	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003287202	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4
929003287302	1300.0	17.0	76.5	0.81	1.454	1.091	1.091	0.8	491.5	368.8	368.8	270.4
929003282808	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003282908	1280.0	17.0	75.3	0.81	1.477	1.108	1.108	0.812	499.2	374.5	374.5	274.5
929003283008	1280.0	17.0	75.3	0.81	1.477	1.108	1.108	0.812	499.2	374.5	374.5	274.5
929003240923	1280.0	17.0	75.3	0.81	1.477	1.108	1.108	0.812	499.2	374.5	374.5	274.5
929003276823	1200.0	15.5	77.4	0.738	1.435	1.076	1.076	0.789	485.0	363.7	363.7	266.7
929003276838	1200.0	15.5	77.4	0.738	1.435	1.076	1.076	0.789	485.0	363.7	363.7	266.7
929003277023	1300.0	15.5	83.9	0.738	1.325	0.994	0.994	0.729	447.8	336.0	336.0	246.4
929003277038	1300.0	15.5	83.9	0.738	1.325	0.994	0.994	0.729	447.8	336.0	336.0	246.4
929003282823	1200.0	15.5	77.4	0.738	1.435	1.076	1.076	0.789	485.0	363.7	363.7	266.7
929003282807	1200.0	17.0	70.6	0.81	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003283023	1280.0	15.5	82.6	0.738	1.345	1.009	1.009	0.74	454.6	341.0	341.0	250.1
929003283007	1280.0	17.0	75.3	0.81	1.477	1.108	1.108	0.812	499.2	374.5	374.5	274.5
929003277107	1400.0	21.0	66.7	1.0	1.667	1.25	1.25	0.917	563.4	422.5	422.5	309.9
929003277307	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003277349	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003277128	1400.0	21.0	66.7	1.0	1.667	1.25	1.25	0.917	563.4	422.5	422.5	309.9
929003277228	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003277328	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003326601	1400.0	20.0	70.0	0.952	1.587	1.19	1.19	0.873	536.4	402.2	402.2	295.1
929003326701	1500.0	20.0	75.0	0.952	1.481	1.111	1.111	0.815	500.6	375.5	375.5	275.5
929003326801	1500.0	20.0	75.0	0.952	1.481	1.111	1.111	0.815	500.6	375.5	375.5	275.5

929003305008	1400.0	21.0	66.7	1.0	1.667	1.25	1.25	0.917	563.4	422.5	422.5	309.9
929003305108	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003305208	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003287402	1400.0	21.0	66.7	1.0	1.667	1.25	1.25	0.917	563.4	422.5	422.5	309.9
929003287502	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003287602	1500.0	21.0	71.4	1.0	1.556	1.167	1.167	0.856	525.9	394.4	394.4	289.3
929003277123	1400.0	19.0	73.7	0.905	1.509	1.132	1.132	0.83	510.0	382.6	382.6	280.5
929003277323	1500.0	19.0	78.9	0.905	1.408	1.056	1.056	0.774	475.9	356.9	356.9	261.6
929003277338	1500.0	19.0	78.9	0.905	1.408	1.056	1.056	0.774	475.9	356.9	356.9	261.6
929003277407	1750.0	24.0	72.9	1.143	1.524	1.143	1.143	0.838	515.1	386.3	386.3	283.2
929003277607	1900.0	24.0	79.2	1.143	1.404	1.053	1.053	0.772	474.6	355.9	355.9	260.9
929003277649	1900.0	24.0	79.2	1.143	1.404	1.053	1.053	0.772	474.6	355.9	355.9	260.9
929003277428	1750.0	24.0	72.9	1.143	1.524	1.143	1.143	0.838	515.1	386.3	386.3	283.2
929003277528	1900.0	24.0	79.2	1.143	1.404	1.053	1.053	0.772	474.6	355.9	355.9	260.9
929003277628	1900.0	24.0	79.2	1.143	1.404	1.053	1.053	0.772	474.6	355.9	355.9	260.9
929003326901	1750.0	23.5	74.5	1.119	1.492	1.119	1.119	0.821	504.3	378.2	378.2	277.5
929003327001	1900.0	23.5	80.9	1.119	1.374	1.03	1.03	0.756	464.4	348.1	348.1	255.5
929003327101	1900.0	23.5	80.9	1.119	1.374	1.03	1.03	0.756	464.4	348.1	348.1	255.5
929003327031	1900.0	23.5	80.9	1.119	1.374	1.03	1.03	0.756	464.4	348.1	348.1	255.5
929003336222	1750.0	21.0	83.3	1.0	1.333	1.0	1.0	0.733	450.6	338.0	338.0	247.8
929003336322	1900.0	21.0	90.5	1.0	1.228	0.921	0.921	0.675	415.1	311.3	311.3	228.2
929003336422	1900.0	21.0	90.5	1.0	1.228	0.921	0.921	0.675	415.1	311.3	311.3	228.2
929003305308	1700.0	24.0	70.8	1.143	1.569	1.177	1.177	0.863	530.3	397.8	397.8	291.7
929003305408	1820.0	24.0	75.8	1.143	1.465	1.099	1.099	0.806	495.2	371.5	371.5	272.4

929003305508	1820.0	24.0	75.8	1.143	1.465	1.099	1.099	0.806	495.2	371.5	371.5	272.4
929003287702	1700.0	24.0	70.8	1.143	1.569	1.177	1.177	0.863	530.3	397.8	397.8	291.7
929003287802	1820.0	24.0	75.8	1.143	1.465	1.099	1.099	0.806	495.2	371.5	371.5	272.4
929003287902	1820.0	24.0	75.8	1.143	1.465	1.099	1.099	0.806	495.2	371.5	371.5	272.4
929003277423	1750.0	21.5	81.4	1.024	1.365	1.024	1.024	0.751	461.4	346.1	346.1	253.8
929003277623	1900.0	21.5	88.4	1.024	1.257	0.943	0.943	0.691	424.9	318.7	318.7	233.6
929003277638	1900.0	21.5	88.4	1.024	1.257	0.943	0.943	0.691	424.9	318.7	318.7	233.6
929003282207	600.0	9.0	66.7	0.429	1.668	1.251	1.251	0.917	563.8	422.8	422.8	309.9
929003282407	640.0	9.0	71.1	0.429	1.564	1.173	1.173	0.86	528.6	396.5	396.5	290.7
929003282208	600.0	9.0	66.7	0.429	1.668	1.251	1.251	0.917	563.8	422.8	422.8	309.9
929003282308	640.0	9.0	71.1	0.429	1.564	1.173	1.173	0.86	528.6	396.5	396.5	290.7
929003282408	640.0	9.0	71.1	0.429	1.564	1.173	1.173	0.86	528.6	396.5	396.5	290.7
929003282207	600.0	9.0	66.7	0.429	1.668	1.251	1.251	0.917	563.8	422.8	422.8	309.9
929003282223	600.0	8.5	70.6	0.405	1.575	1.181	1.181	0.866	532.4	399.2	399.2	292.7
929003282423	640.0	8.5	75.3	0.405	1.477	1.108	1.108	0.812	499.2	374.5	374.5	274.5
929003282407	640.0	9.0	71.1	0.429	1.564	1.173	1.173	0.86	528.6	396.5	396.5	290.7
929003240707	630.0	9.0	70.0	0.429	1.589	1.192	1.192	0.874	537.1	402.9	402.9	295.4
929003240723	630.0	9.0	70.0	0.429	1.589	1.192	1.192	0.874	537.1	402.9	402.9	295.4

** Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" are valid

ANNEX

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

The table in this annex is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

This EPD was done according to a specific customer use location that can be read in the paragraph **PRODUCT USE AND MAINTENANCE (B1-B7)**.

If for example the EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	5,88E+00	2,61E-01	-1,25E-01	6,02E+00	3,02E-01	5,41E-01	MND	MND	MND	MND	MND	4,06E+02	MND	MNR	1,77E-02	2,62E-01	1,88E-01	-1,09E+01

Divide that value according to the EU value from the following table (EU = 3,96E-01) and then multiplying for the Finland value from the same table (FINLAND = 2,70E-01).

Thus, the calculation of this example would be:

$$\text{New B6 GWP tot for Finland} = (4,06E+02 / 3,96E-01) \times 2,70E-01 = 2,76 \text{ E+02}$$

Country	GWP tot (kg CO2 eq. per kwh)
AUSTRALIA	9,59E-01
AUSTRIA	3,37E-01
BELGIUM	2,63E-01
CHINA	1,14E+00
DENMARK	2,91E-01
EU	3,96E-01
FINLAND	2,70E-01
FRANCE	8,77E-02
GERMANY	5,32E-01
HUNGARY	4,67E-01
IRELAND	4,26E-01
ITALY	3,94E-01
LATAM	3,50E-01
NAM	4,83E-01
NETHERLANDS	5,88E-01
NORWAY	2,59E-02

POLAND	1,05E+00
PORTUGAL	4,22E-01
ROW	7,32E-01
SPAIN	3,34E-01
SWEDEN	4,95E-02
SWITZERLAND	5,38E-02
UK	3,17E-01

Source Ecoinvent 3.8