
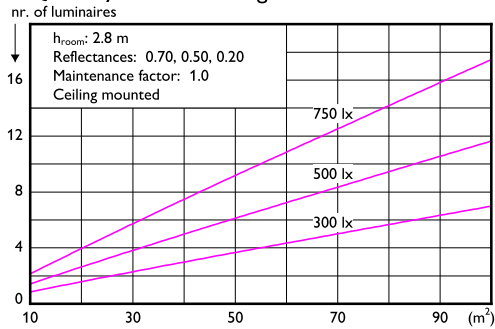
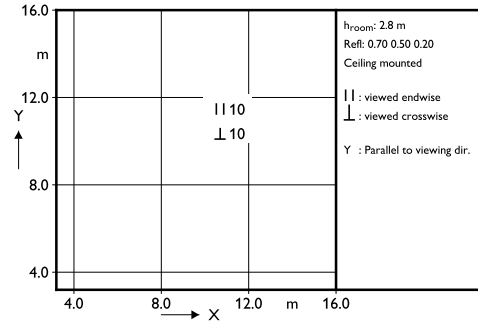


RS350 G2 RC Sq L100 2*23W 36D 1 x 9290041304 3000K

1 x 4000 lm

Polar intensity diagram**Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 100 100 100 100 100

UGRcen (4Hx8H, 0.25H) -1
EN12464-1 55 deg, 200 cd/m²
CIBSE: LG3 55 deg, 200 cd/m²
DIN 5035/7: BAP50

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.86	0.81	0.85	0.83	0.81	0.78	0.78	0.75	0.77	0.75	0.74	0.74
0.80	0.92	0.86	0.91	0.88	0.86	0.83	0.82	0.80	0.82	0.80	0.79	0.79
1.00	0.98	0.91	0.96	0.93	0.90	0.87	0.87	0.85	0.86	0.84	0.83	0.83
1.25	1.03	0.94	1.01	0.97	0.94	0.91	0.90	0.88	0.89	0.88	0.86	0.86
1.50	1.06	0.97	1.05	1.00	0.96	0.93	0.93	0.91	0.92	0.90	0.89	0.89
2.00	1.13	1.00	1.10	1.05	1.00	0.98	0.97	0.95	0.96	0.95	0.93	0.93
2.50	1.17	1.03	1.14	1.08	1.02	1.01	1.00	0.99	0.98	0.98	0.96	0.96
3.00	1.20	1.05	1.17	1.10	1.04	1.03	1.02	1.01	1.00	1.00	0.98	0.98
4.00	1.23	1.06	1.20	1.12	1.05	1.05	1.03	1.03	1.02	1.01	0.99	0.99
5.00	1.25	1.07	1.21	1.13	1.06	1.06	1.04	1.04	1.03	1.03	1.00	1.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	459	458	457	456	456	456	456
50.0	178	177	177	177	177	177	177
55.0	148	147	147	147	147	147	147
60.0	71	71	71	71	70	70	71
65.0	40	40	40	40	40	40	40
70.0	2	1	1	1	1	1	1
75.0	0	0	0	0	0	0	0
80.0	0	0	0	0	0	0	0
85.0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0

(cd/m²)

2024-05-20