



RS350 G2 RC Sq L100 2*23W 24D 1 x 9290041305 4000K

1 x 4300 lm


Polar intensity diagram



Quantity estimation diagram

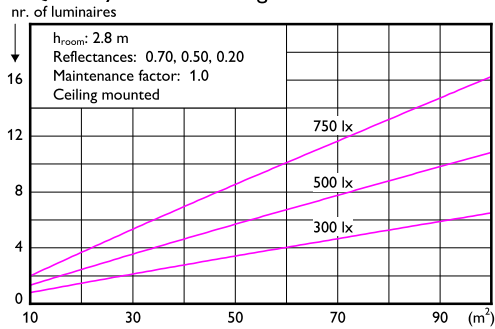

UGR diagram

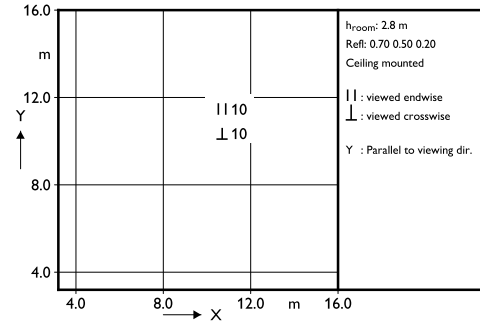

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 100 100 100 100 100

EN12464-1 55 deg, 200 cd/m²
CIBSE: LG3 55 deg, 200 cd/m²
DIN 5035/7: BAP50

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.86	0.81	0.85	0.83	0.81	0.78	0.78	0.75	0.77	0.75	0.74	0.74
0.80	0.92	0.86	0.91	0.88	0.86	0.83	0.82	0.80	0.82	0.80	0.79	0.79
1.00	0.98	0.91	0.96	0.93	0.90	0.87	0.87	0.85	0.86	0.84	0.83	0.83
1.25	1.03	0.94	1.01	0.97	0.94	0.91	0.90	0.88	0.89	0.88	0.86	0.86
1.50	1.06	0.97	1.05	1.00	0.96	0.93	0.93	0.91	0.92	0.90	0.89	0.89
2.00	1.13	1.00	1.10	1.05	1.00	0.98	0.97	0.95	0.96	0.95	0.93	0.93
2.50	1.17	1.03	1.14	1.08	1.02	1.01	1.00	0.99	0.98	0.98	0.96	0.96
3.00	1.20	1.05	1.17	1.10	1.04	1.03	1.02	1.01	1.00	1.00	0.98	0.98
4.00	1.23	1.06	1.20	1.12	1.05	1.05	1.03	1.03	1.02	1.01	0.99	0.99
5.00	1.25	1.07	1.21	1.13	1.06	1.06	1.04	1.04	1.03	1.03	1.00	1.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	391	390	389	388	388	388	389
50.0	170	169	169	169	169	169	169
55.0	121	120	120	120	119	120	120
60.0	54	54	54	54	54	54	54
65.0	31	31	31	31	31	31	31
70.0	1	1	1	1	1	1	1
75.0	0	0	0	0	0	0	0
80.0	0	0	0	0	0	0	0
85.0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0

(cd/m²)

2024-05-20