



Deep Recessed Spot 1 x 9290032210 4000K

1 x 1080 lm


Polar intensity diagram



Quantity estimation diagram

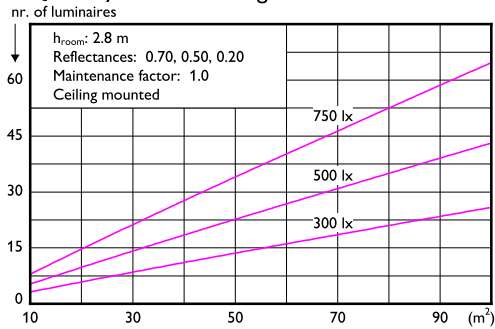

UGR diagram

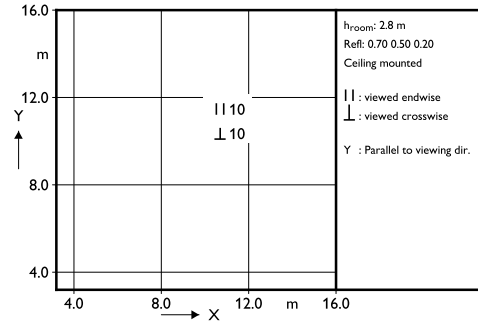

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.86	0.81	0.85	0.83	0.81	0.78	0.78	0.75	0.77	0.75	0.74	0.74
0.80	0.92	0.86	0.91	0.88	0.86	0.83	0.82	0.80	0.82	0.80	0.79	0.79
1.00	0.98	0.91	0.96	0.93	0.90	0.87	0.87	0.85	0.86	0.84	0.83	0.83
1.25	1.03	0.94	1.01	0.97	0.94	0.91	0.90	0.88	0.89	0.88	0.86	0.86
1.50	1.06	0.97	1.05	1.00	0.96	0.93	0.93	0.91	0.92	0.90	0.89	0.89
2.00	1.13	1.00	1.10	1.05	1.00	0.98	0.97	0.95	0.96	0.95	0.93	0.93
2.50	1.17	1.03	1.14	1.08	1.02	1.01	1.00	0.99	0.98	0.98	0.96	0.96
3.00	1.20	1.05	1.17	1.10	1.04	1.03	1.02	1.01	1.00	1.00	0.98	0.98
4.00	1.23	1.06	1.20	1.12	1.05	1.05	1.03	1.03	1.02	1.01	0.99	0.99
5.00	1.25	1.07	1.21	1.13	1.06	1.06	1.04	1.04	1.03	1.03	1.00	1.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	602	602	602	602	602	602	602
50.0	352	352	352	352	352	352	352
55.0	306	306	306	306	306	306	306
60.0	138	138	138	138	138	138	138
65.0	5	5	5	5	5	5	5
70.0	0	0	0	0	0	0	0
75.0	0	0	0	0	0	0	0
80.0	0	0	0	0	0	0	0
85.0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0

(cd/m²)

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 100 100 100 100 100

UGRcen (4Hx8H, 0.25H) 5
EN12464-1 65 deg, 200 cd/m²
CIBSE: LG3 65 deg, 200 cd/m²
DIN 5035/7: BAP60

2022-12-30