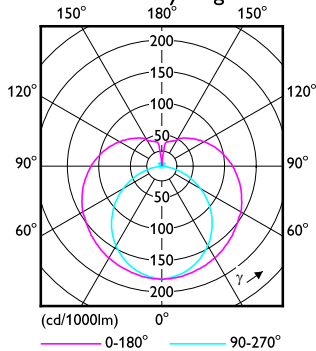
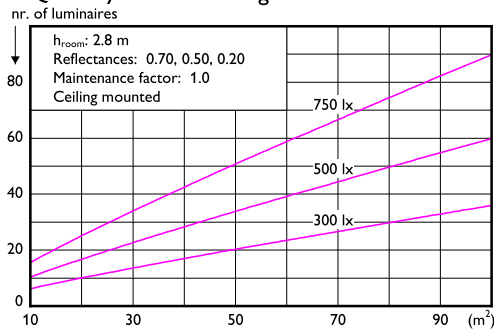


1 x TLED 7.5W 4000K 9290037945**1 x 1100 lm****Polar intensity diagram**

Light output ratio 1.00
Service upward 0.29
Service downward 0.71


CIE flux code 35 62 84 71 100

UGRcen (4Hx8H, 0.25H) 25

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
0.80	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.25	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.50	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
2.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
2.50	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
3.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
4.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00
5.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.00

Ceiling mounted

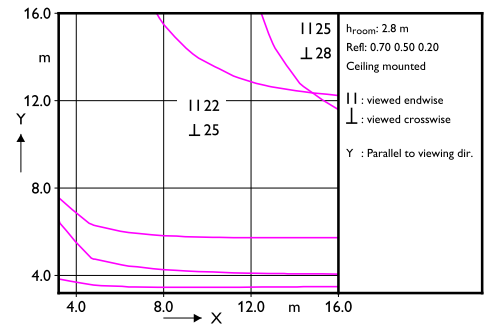UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	8147	7910	7939	7991	8317	9371	11110
50.0	7941	7684	7707	7660	7881	8909	10719
55.0	7805	7508	7505	7355	7461	8411	10225
60.0	7779	7405	7339	7086	7072	7905	9664
65.0	7712	7303	7219	6851	6697	7351	8938
70.0	7702	7255	7154	6678	6389	6769	7954
75.0	7730	7261	7165	6582	6157	6180	6648
80.0	7830	7321	7216	6571	6070	5650	4807
85.0	7968	7444	7367	6673	6126	5328	2318
90.0	8224	7666	7612	6915	6409	5773	407

(cd/m²)

s23120007a

2024-03-04