



Reliable and flexible

GreenPerform Batten G3 BN398C

GreenPerform batten BN398C is a cost competitive linear solution with good performance and multiple lumen output for retail and industry applications. It offers surface mount and suspension installations to cater for different mounting options. Its multiple optic designs accommodate different applications as well.

Benefits

- High system efficacy with better energy saving
- Multiple optics for different applications
- Connected for future proof

Features

- System efficiency up to 140lm/W
- Wide and batwing beams available to fit different lighting applications
- DALI and Interact are available for easy control

Application

- Food & large retail
- Warehouse
- Factory
- Indoor public area

Specifications

Mounting type	Suspended Ceiling
Light Source	LED
Mains Voltage	220-240V / 50-60Hz
Dimming	PSU PSD POE WIA







Material	Housing: SPCC Cover: PMMA
Main color of the luminaire	WH: RAL 9003
Lumen maintenance at median useful life 50.000h	L70B50
Luminous flux	2000lm~8700lm
Luminaire efficacy	Up to 150lm/W

GreenPerform Batten G3 BN398C

Correlated color temperature - CCT	4000K/6500K
Color Rendering index - CRI	80
Beam angle	WB
Protection Class	Safety class I; Safety class III - POE
IEC61140	


Mechanical impact protection	IK03
Ingress protection	IP20
Overall length	600mm 1200mm 1500mm

Dimensional drawing

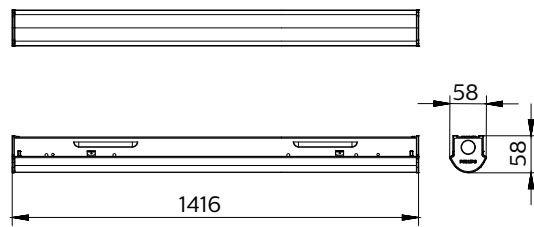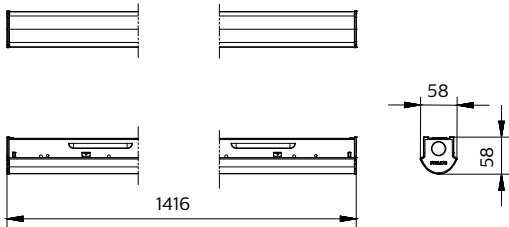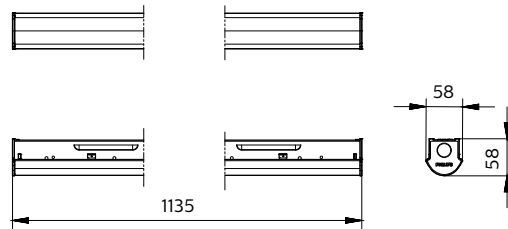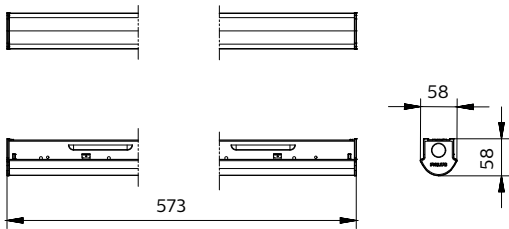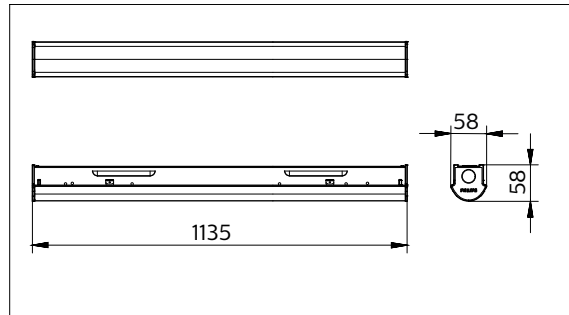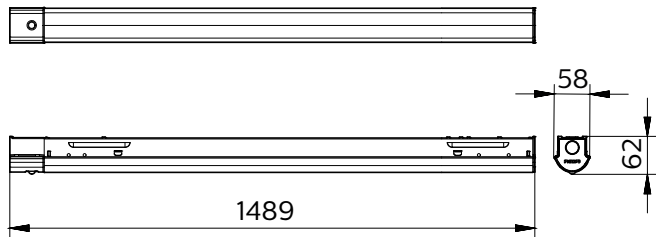

GreenPerform Batten G3 BN398C

Dimensional drawing

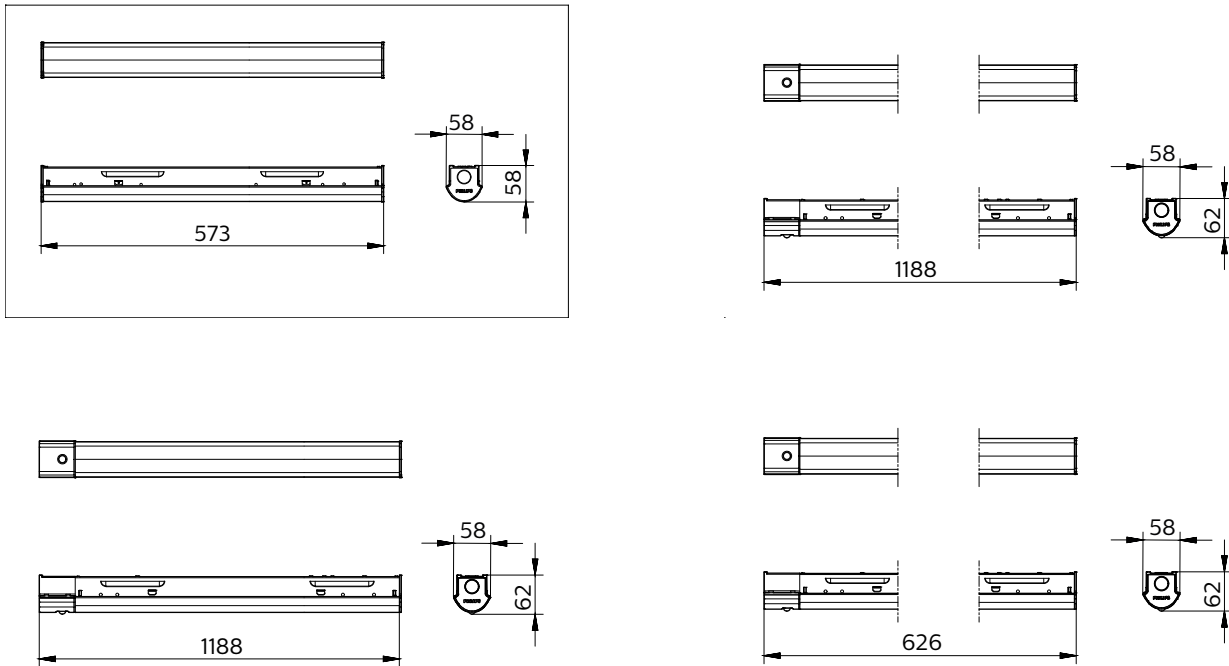

General Information

CE mark	CE mark
ENEC mark	-
Gear	-

Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 or 60 Hz

Approval and Application

Protection class IEC	Safety class I
Mech. impact protection code	IK03
Ingress protection code	IP20

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
-------------------------	--------

General Information

Order Code	Full Product Name	Driver included	Flammability mark	Glow-wire test	Number of gear units
911401549002	BN398X LED69/840 L1200 L1 S OP	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549102	BN398X LED69/865 L1200 L1 S OP	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549202	BN398X LED70/840 L1500 L1 S OP	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549302	BN398X LED70/865 L1500 L1 S OP	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549402	BN398X LED69/840 L1200 L1 S WB	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549502	BN398X LED69/865 L1200 L1 S WB	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549602	BN398X LED70/840 L1500 L1 S WB	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549702	BN398X LED70/865 L1500 L1 S WB	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549802	BN398X LED20/840 L600 L1 W OP	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401549902	BN398X LED20/865 L600 L1 W OP	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401550002	BN398X LED20/840 L600 L1 W WB	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1
911401550102	BN398X LED20/865 L600 L1 W WB	Yes	-	Temperature 650 °C, 1 unit duration 30 s	1

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Driver		Glow-wire test	Number of gear units
		included	Flammability mark		
911401550202	BN398X LED40/840 L1200 L1 W OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401550302	BN398X LED40/865 L1200 L1 W OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401550402	BN398X LED40/840 L1200 L1 W WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401550502	BN398X LED40/865 L1200 L1 W WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401550602	BN398X LED69/840 L1200 L1 W OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401550702	BN398X LED69/865 L1200 L1 W OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401550802	BN398X LED70/840 L1500 L1 W OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401550902	BN398X LED70/865 L1500 L1 W OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401551002	BN398X LED69/840 L1200 L1 W WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401551102	BN398X LED69/865 L1200 L1 W WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401551202	BN398X LED70/840 L1500 L1 W WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401551302	BN398X LED70/865 L1500 L1 W WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401564591	BN398X LED20/840 L600 L1 S OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401564691	BN398X LED20/865 L600 L1 S OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401564791	BN398X LED20/840 L600 L1 S WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401564891	BN398X LED20/865 L600 L1 S WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401564991	BN398X LED40/840 L1200 L1 S OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401565091	BN398X LED40/865 L1200 L1 S OP	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401565191	BN398X LED40/840 L1200 L1 S WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401565291	BN398X LED40/865 L1200 L1 S WB	Yes	-	Temperature 650 °C, duration 30 s	1 unit
911401501571	BN398C LED20/CW L1200 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401501671	BN398C LED20/NW L1200 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401582781	BN398X LED69/840 L1200 WIA OP	-	For mounting on normally flammable surfaces	-	-

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Driver included	Flammability mark	Glow-wire test	Number of gear units
911401583251	BN398C LED20/NW L600 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401583351	BN398C LED20/CW L600 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401583451	BN398C LED40/NW L1200 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401583551	BN398C LED40/CW L1200 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401583651	BN398C LED69/NW L1200 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401583751	BN398C LED69/CW L1200 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401583851	BN398C LED87/NW L1500 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401583951	BN398C LED87/CW L1500 PSU OP	-	For mounting on normally flammable surfaces	-	-
911401584051	BN398C LED20/NW L600 PSD OP	-	For mounting on normally flammable surfaces	-	-
911401584251	BN398C LED40/NW L1200 PSD OP	-	For mounting on normally flammable surfaces	-	-
911401584351	BN398C LED40/CW L1200 PSD OP	-	For mounting on normally flammable surfaces	-	-
911401584451	BN398C LED69/NW L1200 PSD OP	-	For mounting on normally flammable surfaces	-	-
911401584551	BN398C LED69/CW L1200 PSD OP	-	For mounting on normally flammable surfaces	-	-
911401584651	BN398C LED87/NW L1500 PSD OP	-	For mounting on normally flammable surfaces	-	-
911401584751	BN398C LED87/CW L1500 PSD OP	-	For mounting on normally flammable surfaces	-	-
911401584951	BN398C LED20/CW L600 PSU DA	-	For mounting on normally flammable surfaces	-	-
911401585151	BN398C LED40/CW L1200 PSU DA	-	For mounting on normally flammable surfaces	-	-

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Driver			Number of gear units
		included	Flammability mark	Glow-wire test	
911401585251	BN398C LED69/NW L1200 PSU DA	-	For mounting on normally flammable surfaces	-	-
911401585351	BN398C LED69/CW L1200 PSU DA	-	For mounting on normally flammable surfaces	-	-
911401585551	BN398C LED87/CW L1500 PSU DA	-	For mounting on normally flammable surfaces	-	-
911401585651	BN398C LED20/NW L600 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401585751	BN398C LED20/CW L600 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401585851	BN398C LED40/NW L1200 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401585951	BN398C LED40/CW L1200 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401586051	BN398C LED69/NW L1200 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401586151	BN398C LED69/CW L1200 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401586251	BN398C LED87/NW L1500 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401586351	BN398C LED87/CW L1500 PSU WB	-	For mounting on normally flammable surfaces	-	-
911401587851	BN398C LED40/NW L1200 PSU OP TC	-	For mounting on normally flammable surfaces	-	-

Light Technical (1/2)

Order Code	Full Product Name	Beam angle of light source	Correlated Color		Color rendering index (CRI)	Order Code	Full Product Name	Beam angle of light source	Correlated Color		Color rendering index (CRI)
			Temperature (Nom)	Optical cover type					Temperature (Nom)	Optical cover type	
911401549002	BN398X LED69/840 L1200 L1 S OP	- degree(s)	4000 K	Without lens	≥80	911401549202	BN398X LED70/840 L1500 L1 S OP	- degree(s)	4000 K	Without lens	≥80
911401549102	BN398X LED69/865 L1200 L1 S OP	- degree(s)	6500 K	Without lens	≥80	911401549302	BN398X LED70/865 L1500 L1 S OP	- degree(s)	6500 K	Without lens	≥80

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Beam angle of light source	Correlated Color Temperature (Nom)	Optical cover type	Color rendering index (CRI)
911401549402	BN398X LED69/840 L1200 L1 S WB	- degree(s)	4000 K	Without lens	≥80
911401549502	BN398X LED69/865 L1200 L1 S WB	- degree(s)	6500 K	Without lens	≥80
911401549602	BN398X LED70/840 L1500 L1 S WB	- degree(s)	4000 K	Without lens	≥80
911401549702	BN398X LED70/865 L1500 L1 S WB	- degree(s)	6500 K	Without lens	≥80
911401549802	BN398X LED20/840 L600 L1 W OP	- degree(s)	4000 K	Without lens	≥80
911401549902	BN398X LED20/865 L600 L1 W OP	- degree(s)	6500 K	Without lens	≥80
911401550002	BN398X LED20/840 L600 L1 W WB	- degree(s)	4000 K	Without lens	≥80
911401550102	BN398X LED20/865 L600 L1 W WB	- degree(s)	6500 K	Without lens	≥80
911401550202	BN398X LED40/840 L1200 L1 W OP	- degree(s)	4000 K	Without lens	≥80
911401550302	BN398X LED40/865 L1200 L1 W OP	- degree(s)	6500 K	Without lens	≥80
911401550402	BN398X LED40/840 L1200 L1 W WB	- degree(s)	4000 K	Without lens	≥80
911401550502	BN398X LED40/865 L1200 L1 W WB	- degree(s)	6500 K	Without lens	≥80
911401550602	BN398X LED69/840 L1200 L1 W OP	- degree(s)	4000 K	Without lens	≥80
911401550702	BN398X LED69/865 L1200 L1 W OP	- degree(s)	6500 K	Without lens	≥80
911401550802	BN398X LED70/840 L1500 L1 W OP	- degree(s)	4000 K	Without lens	≥80
911401550902	BN398X LED70/865 L1500 L1 W OP	- degree(s)	6500 K	Without lens	≥80

Order Code	Full Product Name	Beam angle of light source	Correlated Color Temperature (Nom)	Optical cover type	Color rendering index (CRI)
911401551002	BN398X LED69/840 L1200 L1 W WB	- degree(s)	4000 K	Without lens	≥80
911401551102	BN398X LED69/865 L1200 L1 W WB	- degree(s)	6500 K	Without lens	≥80
911401551202	BN398X LED70/840 L1500 L1 W WB	- degree(s)	4000 K	Without lens	≥80
911401551302	BN398X LED70/865 L1500 L1 W WB	- degree(s)	6500 K	Without lens	≥80
911401564591	BN398X LED20/840 L600 L1 S OP	- degree(s)	4000 K	Without lens	≥80
911401564691	BN398X LED20/865 L600 L1 S OP	- degree(s)	6500 K	Without lens	≥80
911401564791	BN398X LED20/840 L600 L1 S WB	- degree(s)	4000 K	Without lens	≥80
911401564891	BN398X LED20/865 L600 L1 S WB	- degree(s)	6500 K	Without lens	≥80
911401564991	BN398X LED40/840 L1200 L1 S OP	- degree(s)	4000 K	Without lens	≥80
911401565091	BN398X LED40/865 L1200 L1 S OP	- degree(s)	6500 K	Without lens	≥80
911401565191	BN398X LED40/840 L1200 L1 S WB	- degree(s)	4000 K	Without lens	≥80
911401565291	BN398X LED40/865 L1200 L1 S WB	- degree(s)	6500 K	Without lens	≥80
911401501571	BN398C LED20/CW L1200 PSU OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401501671	BN398C LED20/NW L1200 PSU OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401582781	BN398X LED69/840 L1200 WIA OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401583251	BN398C LED20/NW L600 PSU OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Beam angle of light source	Correlated Color Temperature (Nom)	Optical cover type	Color rendering index (CRI)
911401583351	BN398C LED20/CW L600 PSU OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401583451	BN398C LED40/NW L1200 PSU OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401583551	BN398C LED40/CW L1200 PSU OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401583651	BN398C LED69/NW L1200 PSU OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401583751	BN398C LED69/CW L1200 PSU OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401583851	BN398C LED87/NW L1500 PSU OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401583951	BN398C LED87/CW L1500 PSU OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401584051	BN398C LED20/NW L600 PSD OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401584251	BN398C LED40/NW L1200 PSD OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401584351	BN398C LED40/CW L1200 PSD OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401584451	BN398C LED69/NW L1200 PSD OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401584551	BN398C LED69/CW L1200 PSD OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401584651	BN398C LED87/NW L1500 PSD OP	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401584751	BN398C LED87/CW L1500 PSD OP	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401584951	BN398C LED20/CW L600 PSU DA	-	6500 K	Polymethyl methacrylate bowl/cover	>80

Order Code	Full Product Name	Beam angle of light source	Correlated Color Temperature (Nom)	Optical cover type	Color rendering index (CRI)
911401585151	BN398C LED40/CW L1200 PSU DA	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401585251	BN398C LED69/NW L1200 PSU DA	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401585351	BN398C LED69/CW L1200 PSU DA	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401585551	BN398C LED87/CW L1500 PSU DA	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401585651	BN398C LED20/NW L600 PSU WB	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401585751	BN398C LED20/CW L600 PSU WB	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401585851	BN398C LED40/NW L1200 PSU WB	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401585951	BN398C LED40/CW L1200 PSU WB	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401586051	BN398C LED69/NW L1200 PSU WB	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401586151	BN398C LED69/CW L1200 PSU WB	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401586251	BN398C LED87/NW L1500 PSU WB	-	4000 K	Polymethyl methacrylate bowl/cover	>80
911401586351	BN398C LED87/CW L1500 PSU WB	-	6500 K	Polymethyl methacrylate bowl/cover	>80
911401587851	BN398C LED40/NW L1200 PSU OP TC	-	4000 K	Polymethyl methacrylate bowl/cover	>80

Light Technical (2/2)

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Number of light sources	Optic type
911401549002	BN398X LED69/840 L1200 L1 S OP	138.77551020408163 lm/W	6,800 lm	4	Opal
911401549102	BN398X LED69/865 L1200 L1 S OP	138.77551020408163 lm/W	6,800 lm	4	Opal
911401549202	BN398X LED70/840 L1500 L1 S OP	145.09803921568627 lm/W	7,400 lm	5	Opal
911401549302	BN398X LED70/865 L1500 L1 S OP	145.09803921568627 lm/W	7,400 lm	5	Opal
911401549402	BN398X LED69/840 L1200 L1 S WB	140.81632653061226 lm/W	6,900 lm	4	Opal
911401549502	BN398X LED69/865 L1200 L1 S WB	140.81632653061226 lm/W	6,900 lm	4	Opal
911401549602	BN398X LED70/840 L1500 L1 S WB	136.53846153846155 lm/W	7,100 lm	5	Opal
911401549702	BN398X LED70/865 L1500 L1 S WB	136.53846153846155 lm/W	7,100 lm	5	Opal
911401549802	BN398X LED20/840 L600 L1 W OP	146.66666666666666 lm/W	2,200 lm	2	Opal
911401549902	BN398X LED20/865 L600 L1 W OP	146.66666666666666 lm/W	2,200 lm	2	Opal
911401550002	BN398X LED20/840 L600 L1 W WB	148.14814814814815 lm/W	2,000 lm	2	Opal
911401550102	BN398X LED20/865 L600 L1 W WB	148.14814814814815 lm/W	2,000 lm	2	Opal
911401550202	BN398X LED40/840 L1200 L1 W OP	142.30769230769232 lm/W	3,700 lm	4	Opal
911401550302	BN398X LED40/865 L1200 L1 W OP	142.30769230769232 lm/W	3,700 lm	4	Opal
911401550402	BN398X LED40/840 L1200 L1 W WB	146.15384615384616 lm/W	3,800 lm	4	Opal
911401550502	BN398X LED40/865 L1200 L1 W WB	146.15384615384616 lm/W	3,800 lm	4	Opal

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Number of light sources	Optic type
911401550602	BN398X LED69/840 L1200 L1 W OP	138.77551020408163 lm/W	6,800 lm	4	Opal
911401550702	BN398X LED69/865 L1200 L1 W OP	138.77551020408163 lm/W	6,800 lm	4	Opal
911401550802	BN398X LED70/840 L1500 L1 W OP	145.09803921568627 lm/W	7,400 lm	5	Opal
911401550902	BN398X LED70/865 L1500 L1 W OP	145.09803921568627 lm/W	7,400 lm	5	Opal
911401551002	BN398X LED69/840 L1200 L1 W WB	140.81632653061226 lm/W	6,900 lm	4	Opal
911401551102	BN398X LED69/865 L1200 L1 W WB	140.81632653061226 lm/W	6,900 lm	4	Opal
911401551202	BN398X LED70/840 L1500 L1 W WB	136.53846153846155 lm/W	7,100 lm	5	Opal
911401551302	BN398X LED70/865 L1500 L1 W WB	136.53846153846155 lm/W	7,100 lm	5	Opal
911401564591	BN398X LED20/840 L600 L1 S OP	146.66666666666666 lm/W	2,200 lm	2	Opal
911401564691	BN398X LED20/865 L600 L1 S OP	146.66666666666666 lm/W	2,200 lm	2	Opal
911401564791	BN398X LED20/840 L600 L1 S WB	148.14814814814815 lm/W	2,000 lm	2	Opal
911401564891	BN398X LED20/865 L600 L1 S WB	148.14814814814815 lm/W	2,000 lm	2	Opal
911401564991	BN398X LED40/840 L1200 L1 S OP	142.30769230769232 lm/W	3,700 lm	4	Opal
911401565091	BN398X LED40/865 L1200 L1 S OP	142.30769230769232 lm/W	3,700 lm	4	Opal
911401565191	BN398X LED40/840 L1200 L1 S WB	146.15384615384616 lm/W	3,800 lm	4	Opal
911401565291	BN398X LED40/865 L1200 L1 S WB	146.15384615384616 lm/W	3,800 lm	4	Opal

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Number of light sources	Optic type
911401501571	BN398C LED20/CW L1200 PSU OP	151 lm/W	2,400 lm	-	-
911401501671	BN398C LED20/NW L1200 PSU OP	151 lm/W	2,400 lm	-	-
911401582781	BN398X LED69/840 L1200 WIA OP	142 lm/W	6,900 lm	-	-
911401583251	BN398C LED20/NW L600 PSU OP	147 lm/W	2,100 lm	-	-
911401583351	BN398C LED20/CW L600 PSU OP	147 lm/W	2,100 lm	-	-
911401583451	BN398C LED40/NW L1200 PSU OP	141 lm/W	4,100 lm	-	-
911401583551	BN398C LED40/CW L1200 PSU OP	141 lm/W	4,100 lm	-	-
911401583651	BN398C LED69/NW L1200 PSU OP	140 lm/W	6,900 lm	-	-
911401583751	BN398C LED69/CW L1200 PSU OP	140 lm/W	6,900 lm	-	-
911401583851	BN398C LED87/NW L1500 PSU OP	140 lm/W	8,600 lm	-	-
911401583951	BN398C LED87/CW L1500 PSU OP	140 lm/W	8,600 lm	-	-
911401584051	BN398C LED20/NW L600 PSD OP	144 lm/W	2,100 lm	-	-
911401584251	BN398C LED40/NW L1200 PSD OP	136 lm/W	4,100 lm	-	-
911401584351	BN398C LED40/CW L1200 PSD OP	136 lm/W	4,100 lm	-	-
911401584451	BN398C LED69/NW L1200 PSD OP	138 lm/W	6,800 lm	-	-
911401584551	BN398C LED69/CW L1200 PSD OP	138 lm/W	6,800 lm	-	-
911401584651	BN398C LED87/NW L1500 PSD OP	139 lm/W	8,500 lm	-	-

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Number of light sources	Optic type
911401584751	BN398C LED87/CW L1500 PSD OP	139 lm/W	8,500 lm	-	-
911401584951	BN398C LED20/CW L600 PSU DA	129 lm/W	2,000 lm	-	-
911401585151	BN398C LED40/CW L1200 PSU DA	141 lm/W	4,100 lm	-	-
911401585251	BN398C LED69/NW L1200 PSU DA	123 lm/W	6,800 lm	-	-
911401585351	BN398C LED69/CW L1200 PSU DA	123 lm/W	6,800 lm	-	-
911401585551	BN398C LED87/CW L1500 PSU DA	125 lm/W	8,500 lm	-	-
911401585651	BN398C LED20/NW L600 PSU WB	129 lm/W	2,000 lm	-	-
911401585751	BN398C LED20/CW L600 PSU WB	129 lm/W	2,000 lm	-	-
911401585851	BN398C LED40/NW L1200 PSU WB	141 lm/W	4,100 lm	-	-
911401585951	BN398C LED40/CW L1200 PSU WB	141 lm/W	4,100 lm	-	-
911401586051	BN398C LED69/NW L1200 PSU WB	127 lm/W	7,000 lm	-	-
911401586151	BN398C LED69/CW L1200 PSU WB	127 lm/W	7,000 lm	-	-
911401586251	BN398C LED87/NW L1500 PSU WB	127 lm/W	8,700 lm	-	-
911401586351	BN398C LED87/CW L1500 PSU WB	127 lm/W	8,700 lm	-	-
911401587851	BN398C LED40/NW L1200 PSU OP TC	141 lm/W	4,100 lm	-	-

GreenPerform Batten G3 BN398C

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Order Code	Full Product Name	Power Consumption
911401549002	BN398X LED69/840 L1200 L1 S OP	49 W	911401501571	BN398C LED20/CW L1200 PSU OP	15.8 W
911401549102	BN398X LED69/865 L1200 L1 S OP	49 W	911401501671	BN398C LED20/NW L1200 PSU OP	15.8 W
911401549202	BN398X LED70/840 L1500 L1 S OP	51 W	911401582781	BN398X LED69/840 L1200 WIA OP	48.5 W
911401549302	BN398X LED70/865 L1500 L1 S OP	51 W	911401583251	BN398C LED20/NW L600 PSU OP	14.2 W
911401549402	BN398X LED69/840 L1200 L1 S WB	49 W	911401583351	BN398C LED20/CW L600 PSU OP	14.2 W
911401549502	BN398X LED69/865 L1200 L1 S WB	49 W	911401583451	BN398C LED40/NW L1200 PSU OP	29 W
911401549602	BN398X LED70/840 L1500 L1 S WB	52 W	911401583551	BN398C LED40/CW L1200 PSU OP	29 W
911401549702	BN398X LED70/865 L1500 L1 S WB	52 W	911401583651	BN398C LED69/NW L1200 PSU OP	49 W
911401549802	BN398X LED20/840 L600 L1 W OP	15 W	911401583751	BN398C LED69/CW L1200 PSU OP	49 W
911401549902	BN398X LED20/865 L600 L1 W OP	15 W	911401583851	BN398C LED87/NW L1500 PSU OP	61 W
911401550002	BN398X LED20/840 L600 L1 W WB	13.5 W	911401583951	BN398C LED87/CW L1500 PSU OP	61 W
911401550102	BN398X LED20/865 L600 L1 W WB	13.5 W	911401584051	BN398C LED20/NW L600 PSD OP	14.5 W
911401550202	BN398X LED40/840 L1200 L1 W OP	26 W	911401584251	BN398C LED40/NW L1200 PSD OP	30 W
911401550302	BN398X LED40/865 L1200 L1 W OP	26 W	911401584351	BN398C LED40/CW L1200 PSD OP	30 W
911401550402	BN398X LED40/840 L1200 L1 W WB	26 W	911401584451	BN398C LED69/NW L1200 PSD OP	49 W
911401550502	BN398X LED40/865 L1200 L1 W WB	26 W	911401584551	BN398C LED69/CW L1200 PSD OP	49 W
911401550602	BN398X LED69/840 L1200 L1 W OP	49 W	911401584651	BN398C LED87/NW L1500 PSD OP	61 W
911401550702	BN398X LED69/865 L1200 L1 W OP	49 W	911401584751	BN398C LED87/CW L1500 PSD OP	61 W
911401550802	BN398X LED70/840 L1500 L1 W OP	51 W	911401584951	BN398C LED20/CW L600 PSU DA	15.5 W
911401550902	BN398X LED70/865 L1500 L1 W OP	51 W	911401585151	BN398C LED40/CW L1200 PSU DA	29 W
911401551002	BN398X LED69/840 L1200 L1 W WB	49 W	911401585251	BN398C LED69/NW L1200 PSU DA	55 W
911401551102	BN398X LED69/865 L1200 L1 W WB	49 W	911401585351	BN398C LED69/CW L1200 PSU DA	55 W
911401551202	BN398X LED70/840 L1500 L1 W WB	52 W	911401585551	BN398C LED87/CW L1500 PSU DA	68 W
911401551302	BN398X LED70/865 L1500 L1 W WB	52 W	911401585651	BN398C LED20/NW L600 PSU WB	15.5 W
911401564591	BN398X LED20/840 L600 L1 S OP	16.5 W	911401585751	BN398C LED20/CW L600 PSU WB	15.5 W
911401564691	BN398X LED20/865 L600 L1 S OP	16.5 W	911401585851	BN398C LED40/NW L1200 PSU WB	29 W
911401564791	BN398X LED20/840 L600 L1 S WB	14.85 W	911401585951	BN398C LED40/CW L1200 PSU WB	29 W
911401564891	BN398X LED20/865 L600 L1 S WB	14.85 W	911401586051	BN398C LED69/NW L1200 PSU WB	55 W
911401564991	BN398X LED40/840 L1200 L1 S OP	28.6 W	911401586151	BN398C LED69/CW L1200 PSU WB	55 W
911401565091	BN398X LED40/865 L1200 L1 S OP	28.6 W	911401586251	BN398C LED87/NW L1500 PSU WB	68 W
911401565191	BN398X LED40/840 L1200 L1 S WB	26 W	911401586351	BN398C LED87/CW L1500 PSU WB	68 W
911401565291	BN398X LED40/865 L1200 L1 S WB	26 W	911401587851	BN398C LED40/NW L1200 PSU OP TC	29 W

Temperature

Order Code	Full Product Name	Ambient temperature range	Order Code	Full Product Name	Ambient temperature range
911401549002	BN398X LED69/840 L1200 L1 S OP	0 to +30 °C	911401550402	BN398X LED40/840 L1200 L1 W WB	-20 °C to 40 °C
911401549102	BN398X LED69/865 L1200 L1 S OP	0 to +30 °C	911401550502	BN398X LED40/865 L1200 L1 W WB	-20 °C to 40 °C
911401549202	BN398X LED70/840 L1500 L1 S OP	0 to +30 °C	911401550602	BN398X LED69/840 L1200 L1 W OP	-20 °C to 40 °C
911401549302	BN398X LED70/865 L1500 L1 S OP	0 to +30 °C	911401550702	BN398X LED69/865 L1200 L1 W OP	-20 °C to 40 °C
911401549402	BN398X LED69/840 L1200 L1 S WB	0 to +30 °C	911401550802	BN398X LED70/840 L1500 L1 W OP	-20 °C to 40 °C
911401549502	BN398X LED69/865 L1200 L1 S WB	0 to +30 °C	911401550902	BN398X LED70/865 L1500 L1 W OP	-20 °C to 40 °C
911401549602	BN398X LED70/840 L1500 L1 S WB	0 to +30 °C	911401551002	BN398X LED69/840 L1200 L1 W WB	-20 °C to 40 °C
911401549702	BN398X LED70/865 L1500 L1 S WB	0 to +30 °C	911401551102	BN398X LED69/865 L1200 L1 W WB	-20 °C to 40 °C
911401549802	BN398X LED20/840 L600 L1 W OP	-20 °C to 40 °C	911401551202	BN398X LED70/840 L1500 L1 W WB	-20 °C to 40 °C
911401549902	BN398X LED20/865 L600 L1 W OP	-20 °C to 40 °C	911401551302	BN398X LED70/865 L1500 L1 W WB	-20 °C to 40 °C
911401550002	BN398X LED20/840 L600 L1 W WB	-20 °C to 40 °C	911401564591	BN398X LED20/840 L600 L1 S OP	0 to +30 °C
911401550102	BN398X LED20/865 L600 L1 W WB	-20 °C to 40 °C	911401564691	BN398X LED20/865 L600 L1 S OP	0 to +30 °C
911401550202	BN398X LED40/840 L1200 L1 W OP	-20 °C to 40 °C	911401564791	BN398X LED20/840 L600 L1 S WB	0 to +30 °C
911401550302	BN398X LED40/865 L1200 L1 W OP	-20 °C to 40 °C	911401564891	BN398X LED20/865 L600 L1 S WB	0 to +30 °C

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Ambient temperature range
911401564991	BN398X LED40/840 L1200 L1 S OP	0 to +30 °C
911401565091	BN398X LED40/865 L1200 L1 S OP	0 to +30 °C
911401565191	BN398X LED40/840 L1200 L1 S WB	0 to +30 °C
911401565291	BN398X LED40/865 L1200 L1 S WB	0 to +30 °C
911401501571	BN398C LED20/CW L1200 PSU OP	-20 to +40 °C
911401501671	BN398C LED20/NW L1200 PSU OP	-20 to +40 °C
911401582781	BN398X LED69/840 L1200 WIA OP	-20 to +40 °C
911401583251	BN398C LED20/NW L600 PSU OP	-20 to +40 °C
911401583351	BN398C LED20/CW L600 PSU OP	-20 to +40 °C
911401583451	BN398C LED40/NW L1200 PSU OP	-20 to +40 °C
911401583551	BN398C LED40/CW L1200 PSU OP	-20 to +40 °C
911401583651	BN398C LED69/NW L1200 PSU OP	-20 to +40 °C
911401583751	BN398C LED69/CW L1200 PSU OP	-20 to +40 °C
911401583851	BN398C LED87/NW L1500 PSU OP	-20 to +40 °C
911401583951	BN398C LED87/CW L1500 PSU OP	-20 to +40 °C
911401584051	BN398C LED20/NW L600 PSD OP	-20 to +40 °C
911401584251	BN398C LED40/NW L1200 PSD OP	-20 to +40 °C
911401584351	BN398C LED40/CW L1200 PSD OP	-20 to +40 °C

Order Code	Full Product Name	Ambient temperature range
911401584451	BN398C LED69/NW L1200 PSD OP	-20 to +40 °C
911401584551	BN398C LED69/CW L1200 PSD OP	-20 to +40 °C
911401584651	BN398C LED87/NW L1500 PSD OP	-20 to +40 °C
911401584751	BN398C LED87/CW L1500 PSD OP	-20 to +40 °C
911401584951	BN398C LED20/CW L600 PSU DA	-20 to +40 °C
911401585151	BN398C LED40/CW L1200 PSU DA	-20 to +40 °C
911401585251	BN398C LED69/NW L1200 PSU DA	-20 to +40 °C
911401585351	BN398C LED69/CW L1200 PSU DA	-20 to +40 °C
911401585551	BN398C LED87/CW L1500 PSU DA	-20 to +40 °C
911401585651	BN398C LED20/NW L600 PSU WB	-20 to +40 °C
911401585751	BN398C LED20/CW L600 PSU WB	-20 to +40 °C
911401585851	BN398C LED40/NW L1200 PSU WB	-20 to +40 °C
911401585951	BN398C LED40/CW L1200 PSU WB	-20 to +40 °C
911401586051	BN398C LED69/NW L1200 PSU WB	-20 to +40 °C
911401586151	BN398C LED69/CW L1200 PSU WB	-20 to +40 °C
911401586251	BN398C LED87/NW L1500 PSU WB	-20 to +40 °C
911401586351	BN398C LED87/CW L1500 PSU WB	-20 to +40 °C
911401587851	BN398C LED40/NW L1200 PSU OP TC	-20 to +40 °C

Controls and Dimming

Order Code	Full Product Name	Dimmable
911401549002	BN398X LED69/840 L1200 L1 S OP	No
911401549102	BN398X LED69/865 L1200 L1 S OP	No
911401549202	BN398X LED70/840 L1500 L1 S OP	No
911401549302	BN398X LED70/865 L1500 L1 S OP	No
911401549402	BN398X LED69/840 L1200 L1 S WB	No
911401549502	BN398X LED69/865 L1200 L1 S WB	No
911401549602	BN398X LED70/840 L1500 L1 S WB	No
911401549702	BN398X LED70/865 L1500 L1 S WB	No
911401549802	BN398X LED20/840 L600 L1 W OP	Wireless Dim
911401549902	BN398X LED20/865 L600 L1 W OP	Wireless Dim
911401550002	BN398X LED20/840 L600 L1 W WB	Wireless Dim
911401550102	BN398X LED20/865 L600 L1 W WB	Wireless Dim
911401550202	BN398X LED40/840 L1200 L1 W OP	Wireless Dim
911401550302	BN398X LED40/865 L1200 L1 W OP	Wireless Dim
911401550402	BN398X LED40/840 L1200 L1 W WB	Wireless Dim
911401550502	BN398X LED40/865 L1200 L1 W WB	Wireless Dim
911401550602	BN398X LED69/840 L1200 L1 W OP	Wireless Dim
911401550702	BN398X LED69/865 L1200 L1 W OP	Wireless Dim
911401550802	BN398X LED70/840 L1500 L1 W OP	Wireless Dim
911401550902	BN398X LED70/865 L1500 L1 W OP	Wireless Dim
911401551002	BN398X LED69/840 L1200 L1 W WB	Wireless Dim
911401551102	BN398X LED69/865 L1200 L1 W WB	Wireless Dim
911401551202	BN398X LED70/840 L1500 L1 W WB	Wireless Dim
911401551302	BN398X LED70/865 L1500 L1 W WB	Wireless Dim
911401564591	BN398X LED20/840 L600 L1 S OP	No
911401564691	BN398X LED20/865 L600 L1 S OP	No
911401564791	BN398X LED20/840 L600 L1 S WB	No
911401564891	BN398X LED20/865 L600 L1 S WB	No
911401564991	BN398X LED40/840 L1200 L1 S OP	No
911401565091	BN398X LED40/865 L1200 L1 S OP	No

Order Code	Full Product Name	Dimmable
911401565191	BN398X LED40/840 L1200 L1 S WB	No
911401565291	BN398X LED40/865 L1200 L1 S WB	No
911401501571	BN398C LED20/CW L1200 PSU OP	No
911401501671	BN398C LED20/NW L1200 PSU OP	No
911401582781	BN398X LED69/840 L1200 WIA OP	No
911401583251	BN398C LED20/NW L600 PSU OP	No
911401583351	BN398C LED20/CW L600 PSU OP	No
911401583451	BN398C LED40/NW L1200 PSU OP	No
911401583551	BN398C LED40/CW L1200 PSU OP	No
911401583651	BN398C LED69/NW L1200 PSU OP	No
911401583751	BN398C LED69/CW L1200 PSU OP	No
911401583851	BN398C LED87/NW L1500 PSU OP	No
911401583951	BN398C LED87/CW L1500 PSU OP	No
911401584051	BN398C LED20/NW L600 PSD OP	Yes
911401584251	BN398C LED40/NW L1200 PSD OP	Yes
911401584351	BN398C LED40/CW L1200 PSD OP	Yes
911401584451	BN398C LED69/NW L1200 PSD OP	Yes
911401584551	BN398C LED69/CW L1200 PSD OP	Yes
911401584651	BN398C LED87/NW L1500 PSD OP	Yes
911401584751	BN398C LED87/CW L1500 PSD OP	Yes
911401584951	BN398C LED20/CW L600 PSU DA	No
911401585151	BN398C LED40/CW L1200 PSU DA	No
911401585251	BN398C LED69/NW L1200 PSU DA	No
911401585351	BN398C LED69/CW L1200 PSU DA	No
911401585551	BN398C LED87/CW L1500 PSU DA	No
911401585651	BN398C LED20/NW L600 PSU WB	No
911401585751	BN398C LED20/CW L600 PSU WB	No
911401585851	BN398C LED40/NW L1200 PSU WB	No
911401585951	BN398C LED40/CW L1200 PSU WB	No
911401586051	BN398C LED69/NW L1200 PSU WB	No

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Dimmable
911401586151	BN398C LED69/CW L1200 PSU WB	No
911401586251	BN398C LED87/NW L1500 PSU WB	No

Order Code	Full Product Name	Dimmable
911401586351	BN398C LED87/CW L1500 PSU WB	No
911401587851	BN398C LED40/NW L1200 PSU OP TC	No

Mechanical and Housing

Order Code	Full Product Name	Housing Color
911401549002	BN398X LED69/840 L1200 L1 S OP	White
911401549102	BN398X LED69/865 L1200 L1 S OP	White
911401549202	BN398X LED70/840 L1500 L1 S OP	White
911401549302	BN398X LED70/865 L1500 L1 S OP	White
911401549402	BN398X LED69/840 L1200 L1 S WB	White
911401549502	BN398X LED69/865 L1200 L1 S WB	White
911401549602	BN398X LED70/840 L1500 L1 S WB	White
911401549702	BN398X LED70/865 L1500 L1 S WB	White
911401549802	BN398X LED20/840 L600 L1 W OP	White
911401549902	BN398X LED20/865 L600 L1 W OP	White
911401550002	BN398X LED20/840 L600 L1 W WB	White
911401550102	BN398X LED20/865 L600 L1 W WB	White
911401550202	BN398X LED40/840 L1200 L1 W OP	White
911401550302	BN398X LED40/865 L1200 L1 W OP	White
911401550402	BN398X LED40/840 L1200 L1 W WB	White
911401550502	BN398X LED40/865 L1200 L1 W WB	White
911401550602	BN398X LED69/840 L1200 L1 W OP	White
911401550702	BN398X LED69/865 L1200 L1 W OP	White
911401550802	BN398X LED70/840 L1500 L1 W OP	White
911401550902	BN398X LED70/865 L1500 L1 W OP	White
911401551002	BN398X LED69/840 L1200 L1 W WB	White
911401551102	BN398X LED69/865 L1200 L1 W WB	White
911401551202	BN398X LED70/840 L1500 L1 W WB	White
911401551302	BN398X LED70/865 L1500 L1 W WB	White
911401564591	BN398X LED20/840 L600 L1 S OP	White
911401564691	BN398X LED20/865 L600 L1 S OP	White
911401564791	BN398X LED20/840 L600 L1 S WB	White
911401564891	BN398X LED20/865 L600 L1 S WB	White
911401564991	BN398X LED40/840 L1200 L1 S OP	White
911401565091	BN398X LED40/865 L1200 L1 S OP	White
911401565191	BN398X LED40/840 L1200 L1 S WB	White
911401565291	BN398X LED40/865 L1200 L1 S WB	White

Order Code	Full Product Name	Housing Color
911401501571	BN398C LED20/CW L1200 PSU OP	White RAL 9003
911401501671	BN398C LED20/NW L1200 PSU OP	White RAL 9003
911401582781	BN398X LED69/840 L1200 WIA OP	White RAL 9003
911401583251	BN398C LED20/NW L600 PSU OP	White RAL 9003
911401583351	BN398C LED20/CW L600 PSU OP	White RAL 9003
911401583451	BN398C LED40/NW L1200 PSU OP	White RAL 9003
911401583551	BN398C LED40/CW L1200 PSU OP	White RAL 9003
911401583651	BN398C LED69/NW L1200 PSU OP	White RAL 9003
911401583751	BN398C LED69/CW L1200 PSU OP	White RAL 9003
911401583851	BN398C LED87/NW L1500 PSU OP	White RAL 9003
911401583951	BN398C LED87/CW L1500 PSU OP	White RAL 9003
911401584051	BN398C LED20/NW L600 PSD OP	White RAL 9003
911401584251	BN398C LED40/NW L1200 PSD OP	White RAL 9003
911401584351	BN398C LED40/CW L1200 PSD OP	White RAL 9003
911401584451	BN398C LED69/NW L1200 PSD OP	White RAL 9003
911401584551	BN398C LED69/CW L1200 PSD OP	White RAL 9003
911401584651	BN398C LED87/NW L1500 PSD OP	White RAL 9003
911401584751	BN398C LED87/CW L1500 PSD OP	White RAL 9003
911401584951	BN398C LED20/CW L600 PSU DA	White RAL 9003
911401585151	BN398C LED40/CW L1200 PSU DA	White RAL 9003
911401585251	BN398C LED69/NW L1200 PSU DA	White RAL 9003
911401585351	BN398C LED69/CW L1200 PSU DA	White RAL 9003
911401585551	BN398C LED87/CW L1500 PSU DA	White RAL 9003
911401585651	BN398C LED20/NW L600 PSU WB	White RAL 9003
911401585751	BN398C LED20/CW L600 PSU WB	White RAL 9003
911401585851	BN398C LED40/NW L1200 PSU WB	White RAL 9003
911401585951	BN398C LED40/CW L1200 PSU WB	White RAL 9003
911401586051	BN398C LED69/NW L1200 PSU WB	White RAL 9003
911401586151	BN398C LED69/CW L1200 PSU WB	White RAL 9003
911401586251	BN398C LED87/NW L1500 PSU WB	White RAL 9003
911401586351	BN398C LED87/CW L1500 PSU WB	White RAL 9003
911401587851	BN398C LED40/NW L1200 PSU OP TC	White RAL 9003

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial chromaticity
911401549002	BN398X LED69/840 L1200 L1 S OP	SDCM<21
911401549102	BN398X LED69/865 L1200 L1 S OP	SDCM<25
911401549202	BN398X LED70/840 L1500 L1 S OP	SDCM<29
911401549302	BN398X LED70/865 L1500 L1 S OP	SDCM<33
911401549402	BN398X LED69/840 L1200 L1 S WB	SDCM<22
911401549502	BN398X LED69/865 L1200 L1 S WB	SDCM<26
911401549602	BN398X LED70/840 L1500 L1 S WB	SDCM<30
911401549702	BN398X LED70/865 L1500 L1 S WB	SDCM<34
911401549802	BN398X LED20/840 L600 L1 W OP	SDCM<7

Order Code	Full Product Name	Initial chromaticity
911401549902	BN398X LED20/865 L600 L1 W OP	SDCM<11
911401550002	BN398X LED20/840 L600 L1 W WB	SDCM<8
911401550102	BN398X LED20/865 L600 L1 W WB	SDCM<12
911401550202	BN398X LED40/840 L1200 L1 W OP	SDCM<15
911401550302	BN398X LED40/865 L1200 L1 W OP	SDCM<19
911401550402	BN398X LED40/840 L1200 L1 W WB	SDCM<16
911401550502	BN398X LED40/865 L1200 L1 W WB	SDCM<20
911401550602	BN398X LED69/840 L1200 L1 W OP	SDCM<23
911401550702	BN398X LED69/865 L1200 L1 W OP	SDCM<27

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Initial chromaticity
911401550802	BN398X LED70/840 L1500 L1 W OP	SDCM<31
911401550902	BN398X LED70/865 L1500 L1 W OP	SDCM<35
911401551002	BN398X LED69/840 L1200 L1 W WB	SDCM<24
911401551102	BN398X LED69/865 L1200 L1 W WB	SDCM<28
911401551202	BN398X LED70/840 L1500 L1 W WB	SDCM<32
911401551302	BN398X LED70/865 L1500 L1 W WB	SDCM<36
911401564591	BN398X LED20/840 L600 L1 S OP	SDCM<5
911401564691	BN398X LED20/865 L600 L1 S OP	SDCM<9
911401564791	BN398X LED20/840 L600 L1 S WB	SDCM<6
911401564891	BN398X LED20/865 L600 L1 S WB	SDCM<10
911401564991	BN398X LED40/840 L1200 L1 S OP	SDCM<13
911401565091	BN398X LED40/865 L1200 L1 S OP	SDCM<17
911401565191	BN398X LED40/840 L1200 L1 S WB	SDCM<14
911401565291	BN398X LED40/865 L1200 L1 S WB	SDCM<18
911401501571	BN398C LED20/CW L1200 PSU OP	SDCM<5
911401501671	BN398C LED20/NW L1200 PSU OP	SDCM<5
911401582781	BN398X LED69/840 L1200 WIA OP	SDCM<5
911401583251	BN398C LED20/NW L600 PSU OP	SDCM<5
911401583351	BN398C LED20/CW L600 PSU OP	SDCM<5
911401583451	BN398C LED40/NW L1200 PSU OP	SDCM<5
911401583551	BN398C LED40/CW L1200 PSU OP	SDCM<5
911401583651	BN398C LED69/NW L1200 PSU OP	SDCM<5
911401583751	BN398C LED69/CW L1200 PSU OP	SDCM<5

Order Code	Full Product Name	Initial chromaticity
911401583851	BN398C LED87/NW L1500 PSU OP	SDCM<5
911401583951	BN398C LED87/CW L1500 PSU OP	SDCM<5
911401584051	BN398C LED20/NW L600 PSD OP	SDCM<5
911401584251	BN398C LED40/NW L1200 PSD OP	SDCM<5
911401584351	BN398C LED40/CW L1200 PSD OP	SDCM<5
911401584451	BN398C LED69/NW L1200 PSD OP	SDCM<5
911401584551	BN398C LED69/CW L1200 PSD OP	SDCM<5
911401584651	BN398C LED87/NW L1500 PSD OP	SDCM<5
911401584751	BN398C LED87/CW L1500 PSD OP	SDCM<5
911401584951	BN398C LED20/CW L600 PSU DA	SDCM<5
911401585151	BN398C LED40/CW L1200 PSU DA	SDCM<5
911401585251	BN398C LED69/NW L1200 PSU DA	SDCM<5
911401585351	BN398C LED69/CW L1200 PSU DA	SDCM<5
911401585551	BN398C LED87/CW L1500 PSU DA	SDCM<5
911401585651	BN398C LED20/NW L600 PSU WB	SDCM<5
911401585751	BN398C LED20/CW L600 PSU WB	SDCM<5
911401585851	BN398C LED40/NW L1200 PSU WB	SDCM<5
911401585951	BN398C LED40/CW L1200 PSU WB	SDCM<5
911401586051	BN398C LED69/NW L1200 PSU WB	SDCM<5
911401586151	BN398C LED69/CW L1200 PSU WB	SDCM<5
911401586251	BN398C LED87/NW L1500 PSU WB	SDCM<5
911401586351	BN398C LED87/CW L1500 PSU WB	SDCM<5
911401587851	BN398C LED40/NW L1200 PSU OP TC	SDCM<5

Application Conditions

Order Code	Full Product Name	Suitable for	
		Maximum dim level	random switching
911401549002	BN398X LED69/840 L1200 L1 S OP	20%	Not applicable
911401549102	BN398X LED69/865 L1200 L1 S OP	20%	Not applicable
911401549202	BN398X LED70/840 L1500 L1 S OP	20%	Not applicable
911401549302	BN398X LED70/865 L1500 L1 S OP	20%	Not applicable
911401549402	BN398X LED69/840 L1200 L1 S WB	20%	Not applicable
911401549502	BN398X LED69/865 L1200 L1 S WB	20%	Not applicable
911401549602	BN398X LED70/840 L1500 L1 S WB	20%	Not applicable
911401549702	BN398X LED70/865 L1500 L1 S WB	20%	Not applicable
911401549802	BN398X LED20/840 L600 L1 W OP	20%	Not applicable
911401549902	BN398X LED20/865 L600 L1 W OP	20%	Not applicable
911401550002	BN398X LED20/840 L600 L1 W WB	20%	Not applicable
911401550102	BN398X LED20/865 L600 L1 W WB	20%	Not applicable
911401550202	BN398X LED40/840 L1200 L1 W OP	20%	Not applicable
911401550302	BN398X LED40/865 L1200 L1 W OP	20%	Not applicable
911401550402	BN398X LED40/840 L1200 L1 W WB	20%	Not applicable
911401550502	BN398X LED40/865 L1200 L1 W WB	20%	Not applicable
911401550602	BN398X LED69/840 L1200 L1 W OP	20%	Not applicable
911401550702	BN398X LED69/865 L1200 L1 W OP	20%	Not applicable
911401550802	BN398X LED70/840 L1500 L1 W OP	20%	Not applicable
911401550902	BN398X LED70/865 L1500 L1 W OP	20%	Not applicable
911401551002	BN398X LED69/840 L1200 L1 W WB	20%	Not applicable
911401551102	BN398X LED69/865 L1200 L1 W WB	20%	Not applicable
911401551202	BN398X LED70/840 L1500 L1 W WB	20%	Not applicable

Order Code	Full Product Name	Suitable for	
		Maximum dim level	random switching
911401551302	BN398X LED70/865 L1500 L1 W WB	20%	Not applicable
911401564591	BN398X LED20/840 L600 L1 S OP	20%	Not applicable
911401564691	BN398X LED20/865 L600 L1 S OP	20%	Not applicable
911401564791	BN398X LED20/840 L600 L1 S WB	20%	Not applicable
911401564891	BN398X LED20/865 L600 L1 S WB	20%	Not applicable
911401564991	BN398X LED40/840 L1200 L1 S OP	20%	Not applicable
911401565091	BN398X LED40/865 L1200 L1 S OP	20%	Not applicable
911401565191	BN398X LED40/840 L1200 L1 S WB	20%	Not applicable
911401565291	BN398X LED40/865 L1200 L1 S WB	20%	Not applicable
911401501571	BN398C LED20/CW L1200 PSU OP	-	-
911401501671	BN398C LED20/NW L1200 PSU OP	-	-
911401582781	BN398X LED69/840 L1200 WIA OP	-	-
911401583251	BN398C LED20/NW L600 PSU OP	-	-
911401583351	BN398C LED20/CW L600 PSU OP	-	-
911401583451	BN398C LED40/NW L1200 PSU OP	-	-
911401583551	BN398C LED40/CW L1200 PSU OP	-	-
911401583651	BN398C LED69/NW L1200 PSU OP	-	-
911401583751	BN398C LED69/CW L1200 PSU OP	-	-
911401583851	BN398C LED87/NW L1500 PSU OP	-	-
911401583951	BN398C LED87/CW L1500 PSU OP	-	-
911401584051	BN398C LED20/NW L600 PSD OP	-	-
911401584251	BN398C LED40/NW L1200 PSD OP	-	-
911401584351	BN398C LED40/CW L1200 PSD OP	-	-

GreenPerform Batten G3 BN398C

Order Code	Full Product Name	Maximum dim level	Suitable for random switching
911401584451	BN398C LED69/NW L1200 PSD OP	-	-
911401584551	BN398C LED69/CW L1200 PSD OP	-	-
911401584651	BN398C LED87/NW L1500 PSD OP	-	-
911401584751	BN398C LED87/CW L1500 PSD OP	-	-
911401584951	BN398C LED20/CW L600 PSU DA	-	-
911401585151	BN398C LED40/CW L1200 PSU DA	-	-
911401585251	BN398C LED69/NW L1200 PSU DA	-	-
911401585351	BN398C LED69/CW L1200 PSU DA	-	-
911401585551	BN398C LED87/CW L1500 PSU DA	-	-
911401585651	BN398C LED20/NW L600 PSU WB	-	-

Order Code	Full Product Name	Maximum dim level	Suitable for random switching
911401585751	BN398C LED20/CW L600 PSU WB	-	-
911401585851	BN398C LED40/NW L1200 PSU WB	-	-
911401585951	BN398C LED40/CW L1200 PSU WB	-	-
911401586051	BN398C LED69/NW L1200 PSU WB	-	-
911401586151	BN398C LED69/CW L1200 PSU WB	-	-
911401586251	BN398C LED87/NW L1500 PSU WB	-	-
911401586351	BN398C LED87/CW L1500 PSU WB	-	-
911401587851	BN398C LED40/NW L1200 PSU OP	-	-
	TC		

