


Project		Catalog #		Type	
Prepared by		Notes		Date	

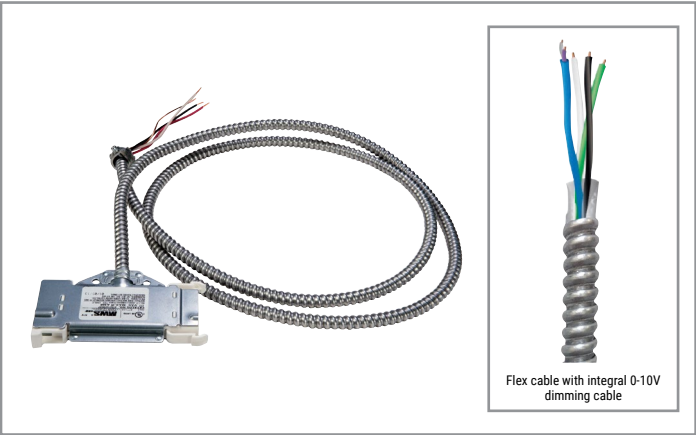

MWS

TC-010V

T Cable with 0-10V Dimming
Modular Wiring System

Typical Applications

Office • Education • Hospitality • Retail • Industrial • Manufacturing • Sports Venues

Interactive Menu

- Order Information page 2
- Product Specifications page 2
- System View page 2
- Product Warranty




Product Certification



Top Product Features

- UL Listed under Standard 183 for make or break under load
- Meets requirements of Article 604 of the National Electrical Code
- Rated at 20 amperes with full-size ground wire
- Copper conductors with THHN insulation rated at 90°C
- Galvanized steel exterior with integral keying for voltage

Dimensional and Mounting Details

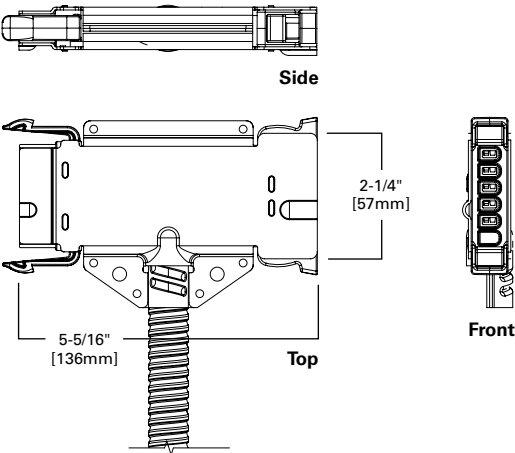

additional product diagrams

Order Information


SAMPLE ORDER NUMBER: **27TC12/4G11-010V**

Voltage	Component	Conductors and Size	Cable Length (Feet)	Dimming
12=120V 20=208V 24=240V 27=277V 34=347V 48=480V	TC=T Cable	10/2G=#10, 2 Conductors Plus Ground 12/2G=#12, 2 Conductors Plus Ground	1=1' 07=7' 09=9' 11=11'	010V=0-10V Dimming

Product Specifications

- UL Listed under Standard 183 for make or break under load
- MWS components assembled with 12 AWG/10 AWG conductors rated at 20 amperes with full size ground wire
- 0-10V Dimming wires 16AWG
- Copper conductors are THHN insulated wire rated 90°C
- Galvanized steel exterior with integral keying for voltage and amperage
- Allows downstream feeding of circuits to another electrical component or fixture
- Cable end supplied with 1/2" connector with locknut and 6" pre-stripped leads
- All unused outlets require a MWS dust cover. MWS ST, SP, SD, CT and TC are shipped with one dust cover attached
- Copper power and control/signal conductors
- Meets the NEC and UL listing requirements for combining power/lighting circuits and class 2 or class 3 signal/control circuits in the same cable

System View (not to scale)

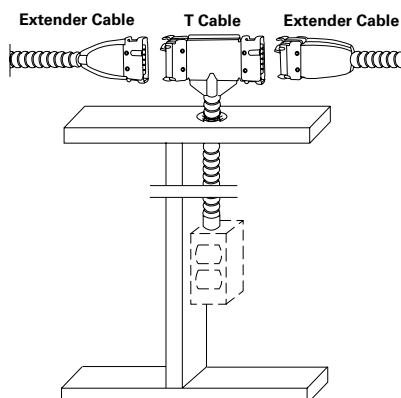

Shipping Data

Cable Lengths	Unit Wt.	Standard Qty./Carton
1'	1.0 lbs.	12
7'	2.5 lbs.	10
9'	3.5 lbs.	8
11'	4.0 lbs.	7

MWS Autocad Drafting

Please reach out to your local representative for MWS layout design assistance.

All electrical boxes, conduit, connections and switches by others.
Install dust covers on unused open ends.
Scale is exaggerated on fixtures and MWS system applications.