



Lumece **Ancestra** LED post top luminaires present a new twist on a classic design. By combining the best aspects of past and present forms with the best that modern technology has to offer, the **Ancestra** luminaires epitomizes Lumece's design philosophy beautifully: to combine the best technology with elegant design.

Project: _____

Location: _____

Cat.No: _____

Type: _____

Lamps: _____ Qty: _____

Notes: _____

Ordering guide

example: AT10-C-140L650NW-G1-3-UNV-DMG-BKTX

| Series | LED module | Gen. | Optical system | Ballast | Driver options ³ | Luminaire options | Poles /Brackets | Finish | |
|--------------------------------------|--|------------|---|---|---|--|---|---|---|
| | | G1 | | | | | | | |
| AT10-C AT20-C AT30-C AT40-C | 3000K 140L450WW ⁵ 140L650WW ⁵ 140L1150WW 140L1675WW 140L2100WW 4000K 140L450NW ⁵ 140L650NW ⁵ 140L1150NW 140L1675NW 140L2100NW | G1 Gen1 | 1 Type I (ASYM) 2 Type II (ASYM) 3 Type III (ASYM) 4 Type IV (ASYM) 5 Type V (SYMM) | UNV 120-277VAC 347 347VAC 480 480VAC | CDMGE25 ¹ Economy 8 hrs. 25% reduction CDMGE50 ¹ Economy 8 hrs. 50% reduction CDMGE75 ¹¹ Economy 8 hrs. 75% reduction CDMGM25 ¹ Median 6 hrs. 25% reduction CDMGM50 ¹ Median 6 hrs. 50% reduction CDMGM75 ¹ Median 6 hrs. 75% reduction CDMGS25 ¹ Safety 4 hrs. 25% reduction CDMGS50 ¹ Safety 4 hrs. 50% reduction CDMGS75 ¹ Safety 4 hrs. 75% reduction DMG 0-10V SRD ¹ Sensor ready driver, standard configuration SRD1 ¹ Sensor ready driver, alternate configuration | DA Decorative arches DC ⁷ Decorative cap DFN10 ⁷ Decorative Coupola DFN20 ⁷ Decorative Coupola FN1 ⁷ Decorative finial FN10 ⁷ Decorative finial FN2 ⁷ Decorative finial FN3 ⁷ Decorative finial FN5 ⁷ Decorative finial FN6 ⁷ Decorative finial FN8 ⁷ Decorative finial FN9 ⁷ Decorative finial WC ⁶ Without cupola | FNC ⁷ Decorative finial painted copper PH8 ^{4,7} Twist-lock Photoelectric Cell PHXL ^{1,7} Twist-lock Photoelectric Cell, extended life, UNV (120-277VAC) PH9 ^{4,7} Shorting cap RC ^{1,7} Receptacle for twist-lock photocell or shorting cap, 3-pin RCD7 ⁶ Receptacle 7 pin SP2 20kV/10kA Surge Protector (optional) TN2.87 2 7/8” dia. Tenon adaptor TN3 3” dia. Tenon adaptor TN3.5 3” 1/2 dia. Tenon adaptor | Consult with Signify.com/ luminaires for details and the complete line of poles and brackets. | Textured BE2TX Midnight Blue BE6TX Ocean Blue BE8TX Royal Blue BG2TX Sandstone BKTX Black BRTX Bronze GN4TX Blue Green GN6TX Forest Green GN8TX Dark Forest Green GNTX Green GY3TX Medium Grey RD2TX Burgundy RD4TX Scarlet WHTX White Other GR Gray Sandtex NP Natural Aluminum TG Hammertone Gold |

1. Not available with **347V** and **480V**.

2. Use of photoelectric cell or shorting cap is required to ensure proper illumination.

3. Select either **CDMG** or **DMG** mandatory option.

4. RC must be selected for this option.

5. For 240 or 277 volt with **CDMG** options consult factory.

6. If **RCD7** is required you need to select **WC** without cupola.
The **RCD7** is located on top of the roof in place of the cupola for use with a control node.

7. Not available with **WC** option


1. Not available with **347V** and **480V**.
 2. Use of photoelectric cell or shorting cap is required to ensure proper illumination.
 3. Select either **CDMG** or **DMG** mandatory option.
 4. RC must be selected for this option.
 5. For 240 or 277 volt with **CDMG** options consult factory.
 6. If **RCD7** is required you need to select **WC** without cupola.
 The **RCD7** is located on top of the roof in place of the cupola for use with a control node.
 7. Not available with **WC** option

AT10-C/AT20-C/AT30-C/AT40-C

Ancestra LED Pendant Post Top

Urban Luminaire

Dimensions

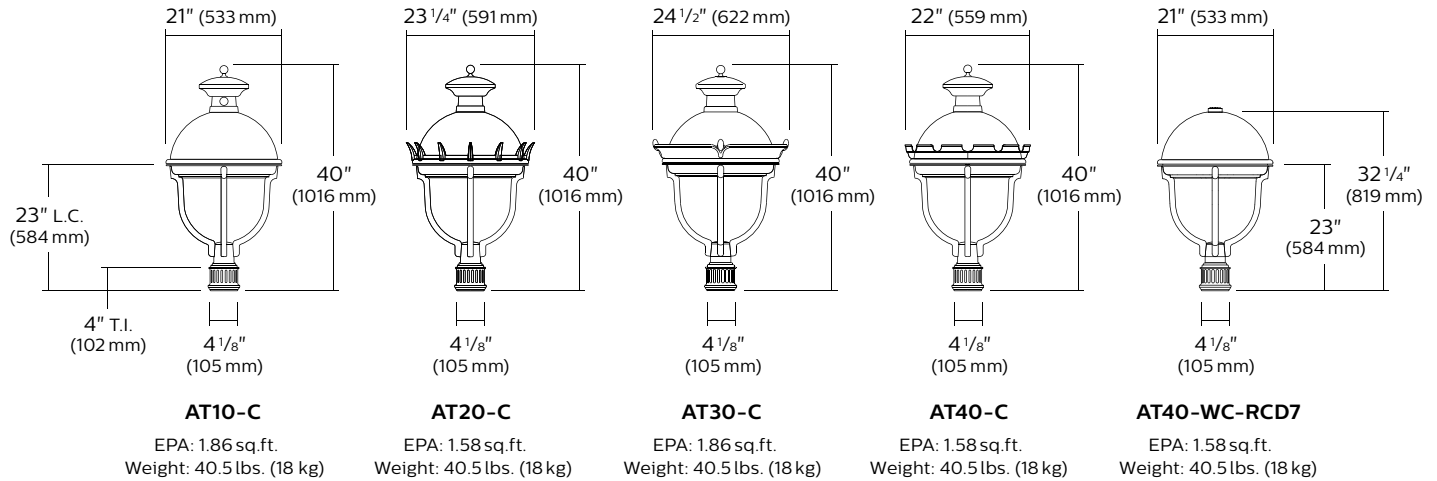

LED Wattage and Lumen Values: for AT10-C/AT20-C/AT30-C/AT40-C

3000K

| Ordering Code: Flat lens (3000K) | Total LEDs | LED current (mA) | Average System Wattage (W) | Type 1 | | | Type 2 | | | Type 3 | | |
|-------------------------------------|---------------|------------------------|-------------------------------------|-----------------|-------------------|------------|-----------------|-------------------|------------|-----------------|-------------------|------------|
| | | | | Lumen Output | Efficacy (LPW) | BUG Rating | Lumen Output | Efficacy (LPW) | BUG Rating | Lumen Output | Efficacy (LPW) | BUG Rating |
| 140L450WW-G1 | 140 | 450 | 21 | 1916 | 91 | B1-U0-G1 | 1930 | 92 | B1-U0-G1 | 2029 | 97 | B1-U0-G1 |
| 140L650WW-G1 | 140 | 650 | 30 | 2680 | 89 | B2-U0-G2 | 2520 | 84 | B1-U0-G1 | 2649 | 88 | B1-U0-G1 |
| 140L1150WW-G1 | 140 | 1150 | 52 | 4562 | 88 | B2-U0-G2 | 4288 | 82 | B2-U0-G2 | 4508 | 87 | B2-U0-G2 |
| 140L1675WW-G1 | 140 | 1675 | 75 | 6265 | 84 | B3-U0-G3 | 5889 | 79 | B3-U0-G3 | 6191 | 83 | B2-U0-G2 |
| 140L2100WW-G1 | 140 | 2100 | 94 | 7602 | 81 | B3-U0-G3 | 7146 | 76 | B3-U0-G3 | 7512 | 80 | B3-U0-G3 |

| Ordering Code: Flat lens (4000K) | Total LEDs | LED current (mA) | Average System Wattage (W) | Type 4 | | | Type 5 | | |
|-------------------------------------|---------------|---------------------|----------------------------------|-----------------|-------------------|------------|-----------------|-------------------|------------|
| | | | | Lumen Output | Efficacy (LPW) | BUG Rating | Lumen Output | Efficacy (LPW) | BUG Rating |
| 140L450WW-G1 | 140 | 450 | 21 | 2110 | 100 | B1-U0-G1 | 1976 | 94 | B1-U0-G1 |
| 140L650WW-G1 | 140 | 650 | 30 | 2755 | 92 | B1-U0-G1 | 2764 | 92 | B2-U0-G1 |
| 140L1150WW-G1 | 140 | 1150 | 52 | 4688 | 90 | B2-U0-G2 | 4705 | 90 | B3-U0-G2 |
| 140L1675WW-G1 | 140 | 1675 | 75 | 6438 | 86 | B2-U0-G2 | 6461 | 86 | B3-U0-G2 |
| 140L2100WW-G1 | 140 | 2100 | 94 | 7812 | 83 | B3-U0-G3 | 7840 | 83 | B3-U0-G2 |

Actual performance may vary due to installation variables including optics, mounting/ceiling height, dirt depreciation, light loss factor, etc.; highly recommended to confirm performance with a layout - contact Applications at signify.com/outdoorluminaires.

Note: Some data may be scaled based on tests of similar. But not identical luminaires.

AT10-C/AT20-C/AT30-C/AT40-C

Ancestra LED Pendant Post Top

Urban Luminaire

LED Wattage and Lumen Values: for AT10-C/AT20-C/AT30-C/AT40-C

4000K

| Ordering Code: Flat lens (3000K) | Total LEDs | LED current (mA) | Average System Wattage (W) | Type 1 | | | Type 2 | | | Type 3 | | |
|-------------------------------------|---------------|------------------------|-------------------------------------|-----------------|-------------------|------------|-----------------|-------------------|------------|-----------------|-------------------|------------|
| | | | | Lumen Output | Efficacy (LPW) | BUG Rating | Lumen Output | Efficacy (LPW) | BUG Rating | Lumen Output | Efficacy (LPW) | BUG Rating |
| 140L450WW-G1 | 140 | 450 | 21 | 1916 | 91 | B1-U0-G1 | 1930 | 92 | B1-U0-G1 | 2029 | 97 | B1-U0-G1 |
| 140L650WW-G1 | 140 | 650 | 30 | 2680 | 89 | B2-U0-G2 | 2520 | 84 | B1-U0-G1 | 2649 | 88 | B1-U0-G1 |
| 140L1150WW-G1 | 140 | 1150 | 52 | 4562 | 88 | B2-U0-G2 | 4288 | 82 | B2-U0-G2 | 4508 | 87 | B2-U0-G2 |
| 140L1675WW-G1 | 140 | 1675 | 75 | 6265 | 84 | B3-U0-G3 | 5889 | 79 | B3-U0-G3 | 6191 | 83 | B2-U0-G2 |
| 140L2100WW-G1 | 140 | 2100 | 94 | 7602 | 81 | B3-U0-G3 | 7146 | 76 | B3-U0-G3 | 7512 | 80 | B3-U0-G3 |

| Ordering Code: Flat lens (4000K) | Total LEDs | LED current (mA) | Average System Wattage (W) | Type 4 | | | Type 5 | | |
|-------------------------------------|---------------|---------------------|----------------------------------|-----------------|-------------------|------------|-----------------|-------------------|------------|
| | | | | Lumen Output | Efficacy (LPW) | BUG Rating | Lumen Output | Efficacy (LPW) | BUG Rating |
| 140L450WW-G1 | 140 | 450 | 21 | 2110 | 100 | B1-U0-G1 | 1976 | 94 | B1-U0-G1 |
| 140L650WW-G1 | 140 | 650 | 30 | 2755 | 92 | B1-U0-G1 | 2764 | 92 | B2-U0-G1 |
| 140L1150WW-G1 | 140 | 1150 | 52 | 4688 | 90 | B2-U0-G2 | 4705 | 90 | B3-U0-G2 |
| 140L1675WW-G1 | 140 | 1675 | 75 | 6438 | 86 | B2-U0-G2 | 6461 | 86 | B3-U0-G2 |
| 140L2100WW-G1 | 140 | 2100 | 94 | 7812 | 83 | B3-U0-G3 | 7840 | 83 | B3-U0-G2 |

Actual performance may vary due to installation variables including optics, mounting/ceiling height, dirt depreciation, light loss factor, etc.; highly recommended to confirm performance with a layout - contact Applications at signify.com/outdoorluminaires.

Note: Some data may be scaled based on tests of similar. But not identical luminaires.

AT10-C/AT20-C/AT30-C/AT40-C

Ancestra LED Pendant Post Top

Urban Luminaire

Specifications

Housing

Hood: Spun aluminum 1100 0 dome, mechanically assembled on the luminaire.

Housing: In a round shape, this housing is made of cast 356 aluminum, c/w a watertight grommet, mechanically assembled to the bracket with four bolts 3/8 16 UNC. This suspension system permits for a full rotation of the luminaire in 90° increments.

Access-mechanism

A die cast A360 aluminum technical ring with latch, hinge and a cast in decorative skirt. The mechanism shall offer tool free access to the inside of the luminaire. An embedded memory retentive gasket shall ensure weatherproofing.

Light engine

Light guide technology provides low-glare, uniform illumination. Composed of 140 LEDs strategically positioned on the edge of the optical plate. Light engine luminous opening size optimized to best achieve a balance between lumen output and optical performance with the need to provide visual comfort. Light engine frame ensures contact with housing to provide heat conduction and sealing against the elements. Light engine is RoHS compliant. Maximum ambient operating temperature up to 40°C(104°F). Standard color temperatures: 3000K +/- 130K, 4000K +/- 130K, Minimum CRI of 70. Also available in 2700K, 3500K, 5000K and Amber (>590nm) with extended lead times. Contact factory for details.

LED Performance

| Predicted lumen depreciation data ¹ | | | | |
|--|---------------|---|--|------------------------------------|
| Ambient Temperature (°C) | Driver mA | Calculated L ₇₀ hours ^{1,2} | L ₇₀ per TM-21 ^{2,3} | Lumen Maintenance % @ 60,000 hours |
| 25°C | up to 2100 mA | >100,000 | >60,000 | 83% |

1. Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions.
2. L₇₀ is the predicted time when LED performance depreciates to 70% of initial lumen output.
3. Calculated per IESNA TM21-11. Published L₇₀ hours limited to 6 times actual LED test hours.

Optical System

The advanced LED comfort optical system provides Types 1, 2, 3, 4 and 5. Composed of high performance UV-stabilized optical grade lens with molded micro-optics to achieve desired distribution optimized to get a exceptional lighting uniformity. Performance tested per LM-79 and TM-15 (IESNA) certifying its photometric performance. Street side indicated luminaire designed with 0% uplight (U0 per IESNA TM-15).

Driver

High power factor of 95%. Electronic driver, operating range 50/60 Hz. Auto adjusting universal voltage input from 120 to 277 and 347 to 480 VAC rated or both application line to line or line to neutral, Class 2, THD of 20% max. Maximum ambient operating temperature from 40°F (40°C) to 130°F (50°C). Certified in compliance to UL1310 cULus requirement. Dry and damp location. Assembled on a unitized removable tray with Tyco quick disconnect plug resisting to 221°F (105°C). Dimmable driver 0-10V. The current supplying the LEDs will be reduced by the driver if the driver experiences internal overheating as a protection to the LEDs and the electrical components. Output is protected from short circuits, voltage overload and current overload. Automatic recovery after correction. Standard built in driver surge protection of 2.5kV (min) with CDMG, driver is class 1.

Surge Protection

Surge protector tested in accordance with ANSI/IEEE C62.45 per ANSI/IEEE C62.41.2 Scenario I Category C High Exposure 0kV/10kA waveforms for Line Ground, Line Neutral and Neutral Ground, and in accordance with U.S. DOE (Department of Energy) MSSLC (Municipal Solid State Street Lighting Consortium) model specification for LED roadway luminaires electrical immunity requirements for High Test Level 10kV / 10kA. SP2 20kV/10kA optional.

Driver options

DMG: Dimmable driver 0-10V.

CDMG: Dynadimmer standard dimming functionalities including pre-programmed scenarios to suit many applications and needs from safety to maximum energy savings.

| Order Code | Dimming | | |
|------------|----------|----------|-------|
| | Scenario | Duration | Level |
| CDMG525 | Safety | 4 hours | 25% |
| CDMG550 | Safety | 4 hours | 50% |
| CDMG575 | Safety | 4 hours | 75% |
| CDMG25 | Median | 6 hours | 25% |
| CDMG50 | Median | 6 hours | 50% |
| CDMG75 | Median | 6 hours | 75% |
| CDMG25 | Economy | 8 hours | 25% |
| CDMG50 | Economy | 8 hours | 50% |
| CDMG75 | Economy | 8 hours | 75% |

SRD: Sensor Ready Driver including SR communication (used for dimming and other functionalities), 24V auxiliary supply and a logical signal input (LSI) connected to the top NEMA twist lock receptacle.

SRD1: Sensor Ready Driver including SR communication (used for dimming and other functionalities) but with 24V auxiliary supply and a logical signal input (LSI) not connected to the top NEMA twist lock.

AT10-C/AT20-C/AT30-C/AT40-C

Ancestra LED Pendant Post Top

Urban Luminaire

Specifications (continued)

Luminaire options

CPT Copper cupola

CPTC Varnished copper cupola



DA
Decorative
arches



DC
Decorative
cap



FN1 Decorative finial



FN2 Decorative finial



FN3 Decorative finial



FN5 Decorative finial



FN6 Decorative finial



FN8 Decorative finial



FN9 Decorative finial



FN10 Decorative finial




FN10 Decorative finial


FNC Decorative finial painted copper



PH8
Photoelectric cell,
twist-lock type.
Allows 90° rotation



PH9
Shorting cap,
twist-lock type



PHXL
Extended life Photoelectric
cell, twist-lock type
Allows 90° rotation




RC
Receptacle
3-pins




RCD7
Receptacle
7-pins

SP2 20kV/10kA integral surge protector (optional)


WC Without Cupola



TN2.875C
2-7/8" dia.
tenon adaptor



TN3
3" dia.
tenon adaptor



TN3.5
3-1/2" dia.
tenon adaptor

Fitter

Cast 356 aluminum c/w 4 set screws 3/8 16 UNC. This fitter holds 2 arms made of cast aluminum 356 mechanically assembled. Slip fits on a 4" (102mm) outside diameter X 4" (102mm) long tenon.

Finish

In accordance with the AAMA 2603 standard. Application of polyester powder coat paint (4 mils/100 microns) with +/- 1 mils/24 microns of tolerance. The Thermosetting resins provides a discoloration resistant finish in accordance with the ASTM D2244 standard, as well as luster retention in keeping with the ASTM D523 standard and humidity proof in accordance with the ASTM D2247 standard. The surface treatment achieves a minimum of 2000 hours for salt spray resistant finish in accordance with testing performed and per ASTM B117 standard.

Textured Finish Options:

BE2TX: Textured Midnight Blue
BE6TX: Textured Ocean Blue
BE8TX: Textured Royal Blue
BG2TX: Textured Sandstone
BKTX: Textured Black
BRTX: Textured Bronze
GN4TX: Textured Blue Green
GN6TX: Textured Forest Green
GN8TX: Textured Dark Forest Green
GNTX: Textured Green
GY3TX: Textured Medium Grey
RD2TX: Textured Burgundy
RD4TX: Textured Scarlet
WHTX: Textured White

Non-Textured Finish Options:

GR: Gray Sandtex
NP: Natural Aluminum
TG: Hammer-tone Gold

Wiring

Gauge (#14) TEW/AWM 1015 or 1230 wires, 6" (152mm) minimum exceeding from luminaire.

Hardware

All exposed screws shall be complete with Ceramic primer-seal base coat to reduce seizing of the parts and offers a high resistance to corrosion. All seals and sealing devices are made and/or lined with EPDM and/or silicone and/or rubber.

Quality control

Manufactured to ISO 9001 2008 standards and ISO 14001-2004 International Quality Standards Certification.

LED products (manufacturing standard)

The electronic components sensitive to electrostatic discharge (ESD) such as light emitting diodes (LEDs) are assembled in compliance with IEC61340 5 1 and ANSI/ESD S20.20 standards so as to eliminate ESD events that could decrease the useful life of the product.

Quality control

Manufactured to ISO 9001 2008 standards and ISO 14001-2004 International Quality Standards Certification.

Certifications and Compliance

CSA, cULus Listed for Canada and USA. Luminaires are DesignLights Consortium qualified.

AT10-C/AT20-C/AT30-C/AT40-C Ancestra LED Pendant Post Top

Urban Luminaire

Poles

