



LED MR16

8MR16/LED/840/F35/DIM 12V 10/1FB

Philips LED MR-16 lamps with single optic technology provide the look and color quality of traditional halogens while using a fraction of the energy. A perfect fit for spot lighting, they are compatible with most existing fixtures with MR16 GU5.3 holders and are designed as a retrofit replacement for halogen or incandescent spots.

Product data

General Information	
Cap-Base	GU5.3
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	35 degree(s)
Luminous Flux	660 lm
Luminous Intensity (Nom)	1,800 cd
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	82.00 lm/W
Color Consistency	<4
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz

Power Consumption	8 W	
Lamp Current (Nom)	720 mA	
Wattage Equivalent	75 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.7	
Voltage (Nom)	ac electronic 12 V	
Temperature		
T-Case Maximum (Nom)	93 °C	
Controls and Dimming		
Dimmable	Only with specific dimmers	
Mechanical and Housing		
Bulb Finish	Clear	
Bulb Material	Aluminum	
Bulb Shape	MR16	
UL Wet/ damp/ dry location	Damp location	
Approval and Application		
Suitable For Accent Lighting	Yes	


Datasheet, 2024, January 5 data subject to change

LED MR16

Energy Certifications	Energy Star	
T20 compliant	No	
Application Conditions		
can it be used in closed luminaires	Yes	
Product Data		
Order product name	8MR16/LED/840/F35/DIM 12V 10/1FB	
Full product name	8MR16/LED/840/F35/DIM 12V 10/1FB	


Order code	929003072904
Material Nr. (12NC)	929003072904
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677573959
Numerator - Packs per outer box	10
EAN/UPC - Case	50046677573954


Dimensional drawing




Product	D	С
8MR16/LED/840/F35/DIM 12V 10/1FB	50 mm	46.5 mm

Photometric data



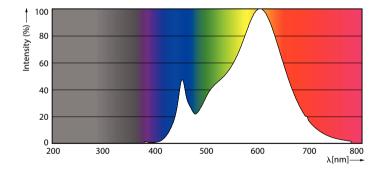

Accent Lighting Spots - 8MR16/LED/840/F35/DIM 12V 10/1FB





Light Distribution Diagram - 8MR16/LED/840/F35/DIM 12V 10/1FB

Spectral Power Distribution Colour - 8MR16/LED/840/F35/DIM 12V 10/1FB

LED MR16

Lifetime

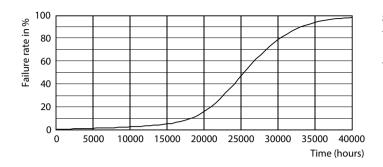

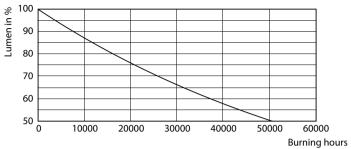

Life Expectancy Diagram - 8MR16/LED/840/F35/DIM 12V 10/1FB

Lumen Maintenance Diagram - 8MR16/LED/840/F35/DIM 12V 10/1FB

