

Professional LEDlamps catalog

Content

LEDlamps portfolio	4
Why choose Philips for LEDlamps	6
EU regulations for LEDlamps	8
Corporate social responsibility	10
Spots segmentation	12
Professional LEDlamps	
LEDspot	14
LEDcapsule	32
LEDbulb	36
LEDcandle	42
LEDluster	48
LEDtube	54
LEDtube - The right LEDtube every time	62
CRI90 - Spot on for color enhancement	63
Value range - Quality, Value and lifetime	63
DimTone - Unique dimming	64
AirFlux technology - innovation in the air	65
Classic LED - Style has nothing to hide	65
High Performance Dimming	66
TransforMax	66
Photometric diagrams	67

LEDspot

MASTER LEDspot



CorePro **LEDcapsule**

LEDcapsule



4 5-50 W





4-35 W MASTER LEDspot MV

MASTER LEDspot MV

MASTER LEDspot MV

CorePro LEDcapsule G9









MASTER LEDspot LV MR16 GU5.3 - P 20-21

MASTER LEDspot LV MR16 GU5.3 - P 20-21

CorePro LEDcapsule G4









MASTER LEDspot LV MR11 GU4 - P 26

MASTER LEDspot LV AR111 G53 - P 27

CorePro LEDcapsule G4



PAR20 / 5.5-50 W PAR30S / 9.5-75 W PAR38 / 13-100 W

MASTER LEDspot MV PAR E27 - P 28-29

MASTER LEDspot Value



MASTER LEDspot Value MV GU10 - P18

MASTER LEDspot Value LV MR16 GU5.3 - P 22

CorePro LEDspot







CorePro LEDspot MV GU10 - P 19

CorePro LEDspot LV GU5.3 - P 24

CorePro LEDspot

LEDbulb

MASTER LEDbulb



MASTER LEDbulb E27/B22 - P 38



MASTER LEDbulb E27/B22 - P 38-39



MASTER LEDbulb E27/B22 - P 39

LEDcandle

MASTER LEDcandle DimTone





MASTER LEDcandle DimTone E14 - P 44-45



MASTER LEDcandle DiamondSpark B22 - P 45

CorePro LEDcandle

LEDluster

MASTER LEDluster DimTone



MASTER LEDluster DimTone E14 - P 50-51



MASTER LEDluster DimTone E27 - P 50-51



MASTER LEDtube

LEDtube

MASTER

LEDtube



MASTER LEDtube -P 58



MASTER LEDtube -P 59

CorePro

LEDtube

CorePro LEDbulb



CorePro LEDbulb E27 - P 40









CorePro LEDbulb E27 - P 41



CorePro LEDcandle E14 - P 46

CorePro LEDluster



MASTER LEDluster E14 - P 52



CorePro LEDtube - P 60



MASTER LEDluster E27 - P 52





BEST product

Our LEDlamps provide you with:

- High quality of light:
 consistency in color of light ...
 and no upleasant surprises in
 the application
- A uniform, directional beam of light ... and no waste of light in places where you don't want light
- Maximum transformer compatibility ... we designed a unique intelligent driver concept for low voltage LEDlamps, which enables broad compatibility with existing transformers
- High performance dimming ... enjoy smooth, flicker-free dimming with our MASTER LEDlamps. Compatible with all the major dimmer brands in the market.

BEST partner

Close cooperation with Philips before, during, and after projects:

"They really managed to satisfy our needs well. They really have cared a lot and showed a lot of commitment ..."

Technical consulting and intense customer support:

"Quick and competent responses to questions"

Close cooperation with local wholesalers was a key element of assuring on-time product availability:

"Philips is flexible to offer different delivery options"


BEST portfolio

- Extensive portfolio ... we have a lamp for every socket and our offer entails an entry range - CorePro ... and a high end range - MASTER
- Philips offers products for all fields in all different segments/ applications, from carpark to supermarket and from office to hotel lobby.

A world leader in LED Lighting

Note: For the full dimmer and transformer compatibility list please visit: www.philips.com/masterledlamps.



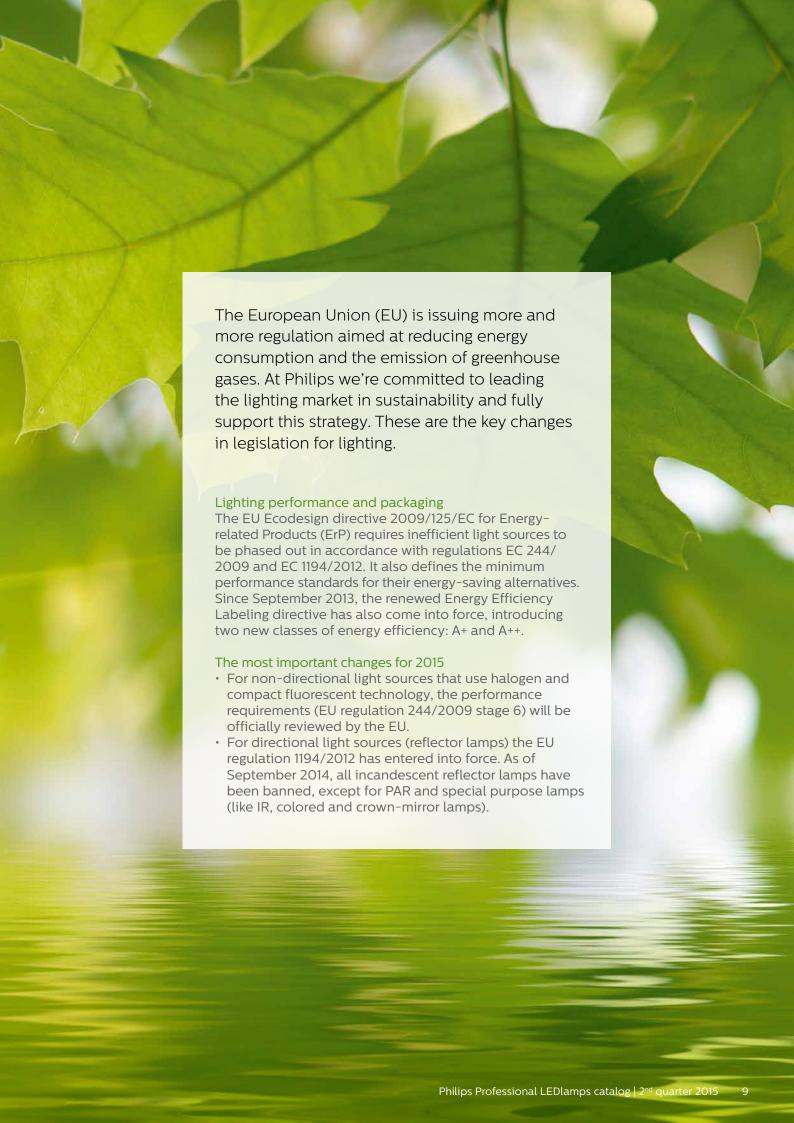



Protecting the environment is something that we're passionate about and an integral part of the way we do business. To reduce the amount of energy our products use, and their CO2 footprint, we invest in the most innovative, energy-efficient technologies.

In fact, we were recognized as one of the top 50 greenest brands in the world by Interbrand (Best Global Green brands 2012).

We care about the things that go into our products too. Since July 1st 2006, the EU Directive on the Restriction of Hazardous Substances (RoHS) has regulated the use of certain materials in electrical and electronic equipment.

Choosing Philips guarantees compliance with all applicable laws. It also offers a wide range of possibilities with lamps that comply with the highest environmental standards.













CorePro LEDspot Range MV & LV

Price fighter

- 15,000 hours lifetime
- · 2 years warranty
- · Non-dimmable
- ·827 & 830 CCT

MASTER LEDspot Value

Range MV & LV

Value for money

- · 35,000 hours lifetime
- · 3 years warranty
- Dimmable
- · 827, 830 & 840 CCT

MASTER LEDspot

Range MV & LV

Ultimate performance

- · 50,000 hours lifetime
- 5 years warranty
- DimTone (for 4.5-35W)
- · CRI90
- · 827, 830 & 840 CCT



MASTER LEDspot



MV GU10 / 4-35 W Page 16



MV GU10 / 4-35 W Page 17

MASTER LEDspot Value



MV GU10 / 3.5-35 W Page 18



CorePro LEDspot

MV GU10 / 3.5-35 W Page 19



MV GU10 / 4.5-50 W Page 16



MV GU10 / 5.4-50 W Page 17



MV GU10 / 4.3-50 W Page 18



MV GU10 / 4.5-50 W Page 19



LV MR16 GU5.3 /6.5-35 W Page 20



LV MR16 GU5.3 / 7-35W Page 21



LV MR16 GU5.3 / 7-40 W Page 21



LV MR16 GU5.3 / 3.4-20 W Page 22



LV GU5.3 / 5.5-35 W Page 24



LV MR11 GU4 / 3.5 W Page 26



LV AR111 G53 / 10-50 W Page 27



LV AR111 G53 / 15-75 W Page 27



LV MR16 GU5.3 / 6.5-35 W Page 22



MV PAR20 E27/5.5-50 W Page 28



MV PAR30S E27/9.5-75 W Page 28



MV R50 E14 / 4.5-40 W Page 30



MV PAR38 E27 / 13-100 W Page 29



MASTER LEDspot MV

With our LEDspots Mains Voltage you can enjoy bright, energizing light, at the same time as saving energy and money. Perfect for accent and general lighting. With DimTone the light gets warmer when dimmed. CRI90 gives you the best color presentation (for retail applications).

- CRI90 see page 63
- DimTone: the more you dim the warmer the light - see page 64
- High Performance Dimming see page 66
- Longest lifetime
- Superior light quality
- Maximum energy savings
- Delivers commited lifetime in application



MASTER LEDspot MV DimTone / 4-35 W





2700 - 2200

















Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV	w	w	lm	lm/W	cd	۰		К	8718696
DimTone 4-35W GU10 25D	4	35	280	70	1000	25	80	2700-2200	43828200
DimTone 4-35W GU10 40D	4	35	280	70	600	40	80	2700-2200	43830500



MASTER LEDspot MV DimTone / 4.5-50 W













FFI



10 PACK









Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV	w	w	lm	lm/W	cd	۰		К	8718696
DimTone 4.5-50W GU10 25D	4.5	50	355	79	1400	25	80	2700-2200	43840400
DimTone 4.5-50W GU10 40D	4.5	50	355	79	800	40	80	2700-2200	43842800







MASTER LEDspot MV / 4-35 W / CRI 90























Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV	w	w	lm	lm/W	cd	٠		К	8718696
D 4-35W GU10 927 25D	4	35	250	63	925	25	90	2700	45727600
D 4-35W GU10 930 25D	4	35	260	65	962	25	90	3000	45731300
D 4-35W GU10 940 25D	4	35	282	71	1040	25	90	4000	45735100
D 4-35W GU10 927 40D	4	35	262	66	560	40	90	2700	45729000
D 4-35W GU10 930 40D	4	35	272	68	582	40	90	3000	45733700



D 4-35W GU10 940 40D



MASTER LEDspot MV / 5.4-50 W / CRI 90









285





624







4000



45739900



Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV	w	w	lm	lm/W	cd	٠		К	8718696
D 5.4-50W GU10 927 25D	4.5	50	360	80	1350	25	90	2700	45715300
D 5.4-50W GU10 930 25D	4.5	50	360	80	1350	25	90	3000	45719100
D 5.4-50W GU10 927 40D	4.5	50	378	84	800	40	90	2700	45717700
D 5.4-50W GU10 930 40D	4.5	50	378	84	800	40	90	3000	45721400
D 5.4-50W GU10 940 40D	4.5	50	392	87	830	40	90	4000	45725200



 $Please\ refer\ to\ the\ site\ www.philips.com/masterled lamps\ for\ the\ latest\ information\ about\ dimming\ MASTER\ LED lamps\ and\ about\ transformer\ compatibility.$



MASTER LEDspot MV Value

Quality, VALUE and lifetime

You've got it in one with the new range of MASTER LEDspot Value lamps. Designed with a 25D and 36D beam angle for general lighting applications in retail and hospitality, they offer high quality at an affordable price. With a choice of three color temperatures, dimmable options, and a reliable lifetime, it's everything you value in LED.

- New MASTER Value range see page 63
- High Performance Dimming see page 66
- Long lifetime
- Superior light quality
- Maximum energy savings



MASTER LEDspot MV Value / 3.5-35 W





GU10





35,000 H



10 PACK





BEAM ANGLE





Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV Value	w	w	lm	lm/W	cd	٠		К	8718696
D 3.5-35W GU10 827 25D	3.5	35	260	74	1000	25	80	2700	43832900
D 3.5-35W GU10 830 25D	3.5	35	270	77	1000	25	80	3000	43834300
D 3.5-35W GU10 840 25D	3.5	35	290	83	1000	25	80	4000	43836700
D 3.5-35W GU10 827 40D	3.5	35	260	74	600	40	80	2700	45703000
D 3.5-35W GU10 830 40D	3.5	35	270	77	600	40	80	3000	45705400
D 3.5-35W GU10 840 40D	3.5	35	290	83	600	40	80	4000	45707800



MASTER LEDspot MV Value / 4.3-50 W









35,000 H











Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV Value	w	w	lm	lm/W	cd	٠		К	8718696
D 4.3-50W GU10 827 25D	4.3	50	355	83	1400	25	80	2700	43838100
D 4.3-50W GU10 830 25D	4.3	50	365	85	1400	25	80	3000	43844200
D 4.3-50W GU10 840 25D	4.3	50	390	91	1400	25	80	4000	43846600
D 4.3-50W GU10 827 40D	4.3	50	355	83	800	40	80	2700	45709200
D 4.3-50W GU10 830 40D	4.3	50	365	85	800	40	80	3000	45711500
D 4 3-50W GUIO 840 40D	43	50	390	91	800	40	80	4000	45713900



CorePro LEDspot MV

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light.

- Easy retrofit
- · Long lifetime
- · Huge energy saving
- · Low heat generation



CorePro LEDspot MV / 3.5-35 W









15,000 H







BEAM ANGLE





Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
CorePro LEDspot MV	w	w	lm	lm/W	cd			К	87182917
3.5-35W 2700K 36D	3.5	35	270	77	680	36	80	2700	9916000
3.5-35W 3000K 36D	3.5	35	270	77	680	36	80	3000	9918400



CorePro LEDspot MV / 4.5-50 W





















Pro	oduct type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
Co	rePro LEDspot MV	w	w	lm	lm/W	cd	٠		К	8718291
4.5-	50W 2700K 36D	4.5	50	380	84	950	36	80	2700	9920700
4.5-	50W 3000K 36D	4.5	50	380	84	950	36	80	3000	9922100





MASTER LEDspot LV MR16

The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.)

- AirFlux see page 65
- TransforMax (excluding 20 W) see page 66
- DimTone: the more you dim the warmer the light - see page 64
- Dimmable
- Long lifetime
- Compatible with most commonly available halogen transformers. Exclusively suited for electronic transformers



MASTER LEDspot LV MR16 / 6.5-35 W DimTone



















BEAM ANGLE





Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot LV	w	w	lm	lm/W	cd	۰		К	8718969
6.5-35W 2700K MR16 24D	6.5	35	370	57	1800	24	80	2700-2200	44213500
6.5-35W 2700K MR16 36D	6.5	35	370	57	900	36	80	2700-2200	44215900



MASTER LEDspot LV MR16 / 7-35 W















BEAM ANGLE







*† IUX HNOLOGY	11	2700 / 3000

/ 4000











Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot LV	w	w	lm	lm/W	cd	•		K	8718291
D 7-35W 2700K MR16 24D	7	35	350	50	1950	24	80	2700	65447600
D 7-35W 2700K MR16 36D	7	35	350	50	1050	36	80	2700	65538100
D 7-35W 2700K MR16 60D	7	35	420	60	460	60	80	2700	65544200
D 7-35W 3000K MR16 24D	7	35	350	50	1950	24	80	3000	65449000
D 7-35W 3000K MR16 36D	7	35	350	50	1050	36	80	3000	65540400
D 7-35W 3000K MR16 60D	7	35	350	50	360	60	80	3000	65546600
D 7-35W 4000K MR16 24D	7	35	380	54	2050	24	80	4000	65536700
D 7-35W 4000K MR16 36D	7	35	380	54	1100	36	80	4000	65542800



MASTER LEDspot LV MR16 / 7-40 W





















2700 / 3000 / 4000

GU5.3

DIMMABLE

40,000 H

EEL

10 PACK BEAM ANGLE

DIMENSIONS

82%

Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot LV	w	w	lm	lm/W	cd	٠		К	8718291
D 7-40W 2700K MR16 24D	7	40	470	67	2400	24	80	2700	74135000
D 7-40W 2700K MR16 36D	7	40	455	65	1300	36	80	2700	74139800
D 7-40W 3000K MR16 24D	7	40	485	69	2500	24	80	3000	74137400
D 7-40W 3000K MR16 36D	7	40	485	69	2500	36	80	3000	74141100
D 7-40W 4000K MR16 36D	7	40	520	74	1450	36	80	4000	79541400



MASTER LEDspot LV Value MR16

Quality, VALUE and lifetime

You've got it in one with the new range of MASTER LEDspot Value lamps. Designed with a 36D beam angle for general lighting applications in retail and hospitality, they offer high quality at an affordable price. With a choice of three color temperatures, dimmable options, and a reliable lifetime, it's everything you value in LED.

- AirFlux see page 65
- TransforMax (excluding 20 W) see page 66
- · Dimmable
- · Long lifetime
- Compatible with most commonly available halogen transformers. Exclusively suited for electronic transformers



MASTER LEDspot LV Value MR16 / 3.4-20 W



















П	2700 / 3000	GU5.3	NON-DIMMABLE	25,000 H	EEL	10 PACK		BEAM ANGLE	DIMENSIONS	83%
Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC	
MASTER LEDspot LV Value	w	w	lm	lm/W	cd	•		К	8718696	
3.4-20W 827 MR16 24D	3.4	20	220	65	1000	24	80	2700	47570600	
3.4-20W 830 MR16 24D	3.4	20	225	66	1000	24	80	3000	47576800	
3.4-20W 827 MR16 36D	3.4	20	220	65	550	36	80	2700	47572000	
3.4-20W 830 MR16 36D	3.4	20	225	66	600	36	80	3000	47574400	



MASTER LEDspot LV Value MR16 / 6.5-35 W





















2700 / 3000 / 4000

GU5.3

DIMMABLE

25.000 H

EEL EEL 2700 / 3000 4000


10 PACK

BEAM ANGLE DIMENSIONS

					2,00,000	.000				
Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC	
MASTER LEDspot LV Value	w	w	lm	lm/W	cd	•		К	8718696	8718291
D 6.5-35W 2700K MR16 24D	6.5	35	420	65	1800	24	80	2700	44217300	
D 6.5-35W 3000K MR16 24D	6.5	35	440	68	1900	24	80	3000	44219700	
D 6.5-35W 4000K MR16 24D	6.5	35	480	74	1900	24	80	4000	44221000	
D 6.5-35W 2700K MR16 36D	6.5	35	390	60	900	36	80	2700		77533100
D 6.5-35W 3000K MR16 36D	6.5	35	420	60	960	36	80	3000		78543900
D 6.5-35W 4000K MR16 36D	6.5	35	460	71	990	36	80	4000		17854300



Please refer to the site www.philips.com/masterledlamps for the latest information about dimming MASTER LEDlamps and about transformer compatibility.

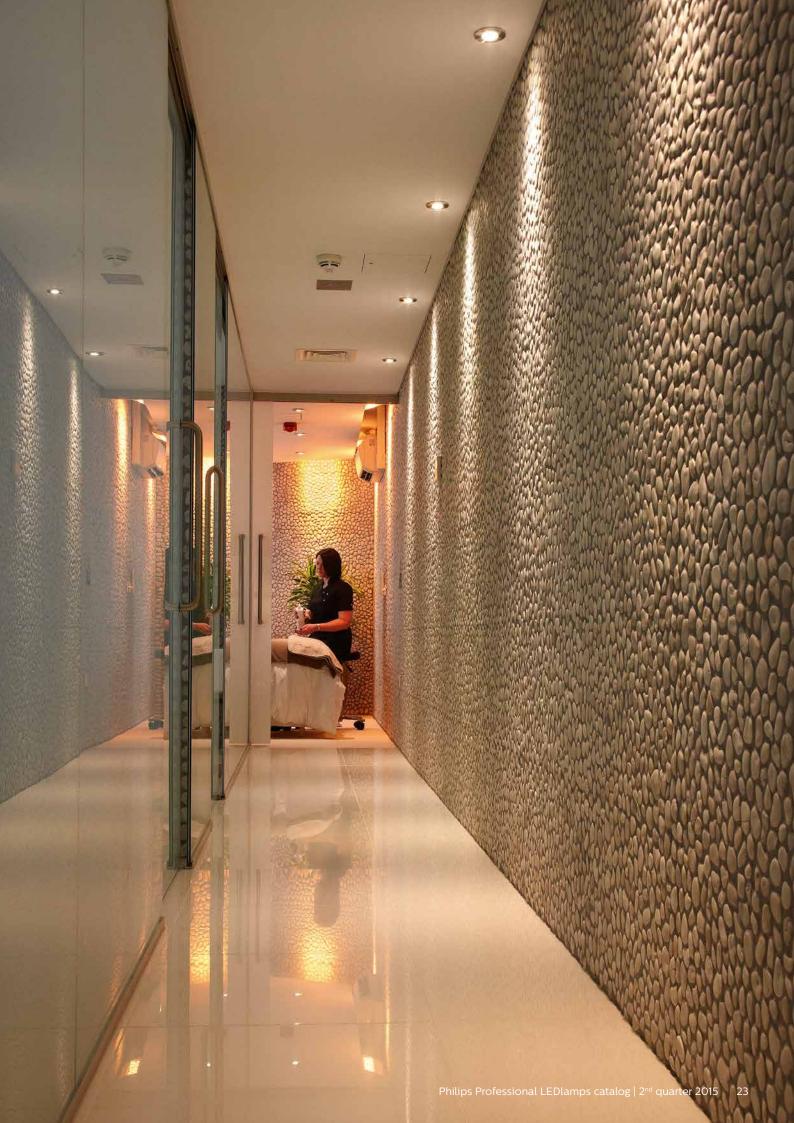




CorePro LEDspot LV MR16

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. These are compatible with most existing fixtures with MR16 GU5.3 holders and are designed as a retrofit replacement for halogen or incandescent spots.

- Easy retrofit
- · Long lifetime
- Huge energy saving
- Low heat generation
- · Improved lens cap design
- · Reliable Philips quality for competitive price

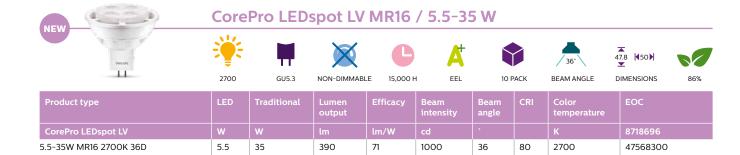



 $Please\ refer\ to\ the\ site\ www.philips.com/masterled lamps\ for\ the\ latest\ information\ about\ transformer\ compatibility.$





MASTER LEDspot LV MR11

The MR11 spot truly enhances the presentation of silver jewelry, adding sparkle to the items on display.

- TransforMax see page 66
- Long lifetime
- · Clearly defined beam spread
- Compatible with most commonly available halogen transformers. Exclusively suited for electronic transformers



MASTER LEDspot LV MR11 / 3.5-20 W







NON-DIMMABLE







BEAM ANGLE

40 **(**35**)**



Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot LV	W	w	lm	lm/W	cd	•		K	8718696
3 5-20W GH4 2700K 24D	3.5	20	200	57	1000	2/	80	2700	41019600





These spots are dimmable and ideal for accent and general lighting.

- TransforMax see page 66
- Dimmable
- · Long lifetime



MASTER LEDspot LV AR111 / 10-50 W













BEAM ANGLE







Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot LV	w	W	lm	lm/W	cd	•		К	8718291
AR111 2700K 24D 10 W	10	50	610	61	3620	24	80	2700	71846800
AR111 2700K 40D 10 W	10	50	580	58	1250	40	80	2700	71850500
AR111 3000K 24D 10 W	10	50	645	65	3820	24	80	3000	71848200
AR111 3000K 40D 10 W	10	50	610	61	1300	40	80	3000	71852900



MASTER LEDspot LV AR111 / 15-75 W



2700 / 3000















BEAM ANGLE







Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot LV	w	w	lm	lm/W	cd	•		К	8718291
AR111 2700K 24D 15 W	15	75	800	53	4750	24	80	2700	71854300
AR111 2700K 40D 15 W	15	75	760	51	1660	40	80	2700	71858100
AR111 3000K 24D 15 W	15	75	840	56	4950	24	80	3000	71856700
AR111 3000K 40D 15 W	15	75	800	53	1700	40	80	3000	71860400



Please refer to the site www.philips.com/masterledlamps for the latest information about dimming MASTER LEDlamps and about transformer compatibility.



MASTER LEDspot MV PAR

With our LEDspots Mains Voltage you can enjoy bright, energizing light, at the same time as saving energy and money. Perfect for task lighting.

- AirFlux see page 65
- Longest lifetime
- · For accent and general lighting
- Superior light quality
- Maximum energy savings
- New and improved design
- PAR38 OD: outdoor IP65



MASTER LEDspot MV PAR / 5.5-50 W PAR20















BEAM ANGLE





4000 K / 25D												
Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC			
MASTER LEDspot MV	w	w	lm	lm/W	cd	٠		К	8718696			
D 5.5-50W 2700K PAR20 25D	5.5	50	480	87	2000	25	80	2700	46063400			
D 5.5-50W 3000K PAR20 25D	5.5	50	490	89	2050	25	80	3000	46065800			
D 5.5-50W 4000K PAR20 25D	5.5	50	520	94	2150	25	80	4000	46067200			
D 5.5-50W 2700K PAR20 40D	5.5	50	480	87	950	40	80	2700	46069600			
D 5.5-50W 3000K PAR20 40D	5.5	50	490	89	970	40	80	3000	46071900			
D 5.5-50W 4000K PAR20 40D	5.5	50	520	94	1000	40	80	4000	46073300			



MASTER LEDspot MV PAR / 9.5-75 W PAR30S















BEAM ANGLE

DIMENSIONS



Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV	w	w	lm	lm/W	cd	۰		К	8718291
D 9.5-50W 2700K PAR30S 25D	9.5	75	650	68	3500	25	80	2700	71434700
D 9.5-50W 4000K PAR30S 25D	9.5	75	750	79	3850	25	80	4000	71436100



Please refer to the site www.philips.com/masterledlamps for the latest information about dimming MASTER LEDlamps.





MASTER LEDspot MV PAR / 13-100 W PAR38



















DIMMABLE 40,000 H (indoor) 20,000 H (outdoor)

BEAM ANGLE

DIMENSIONS

Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
MASTER LEDspot MV	w	W	lm	lm/W	cd	•		К	8718696
D 13-100W 2700K PAR38 25D	13	100	1000	62	5000	25	80	2700	46043600



CorePro LEDspot MV R50

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light.

- Easy retrofit
- Long lifetime
- · Huge energy saving
- Low heat generation



CorePro LEDspot MV R50 / 4.5-40 W

















,	89%	

Product type	LED	Traditional	Lumen output	Efficacy	Beam intensity	Beam angle	CRI	Color temperature	EOC
CorePro LEDspot R50	w		lm	lm/W	cd	•		К	8718291
4.5-40W E14 2700K 36D	4.5	40	255	57	650	36	80	2700	77017600



 $Please\ refer\ to\ the\ site\ www.philips.com/masterledlamps\ for\ the\ latest\ information\ about\ dimming\ MASTER\ LEDlamps.$









CorePro LEDcapsule LV

Our LEDcapsule provides crisp, sparkling halogen like light. It is especially suitable for task lighting and decorative applications.

- · Long lifetime
- UV- and IR-free light for less heat and protection
- For heat-sensitive objects
- Unique sparkling effect










CorePro LEDcapsule MV





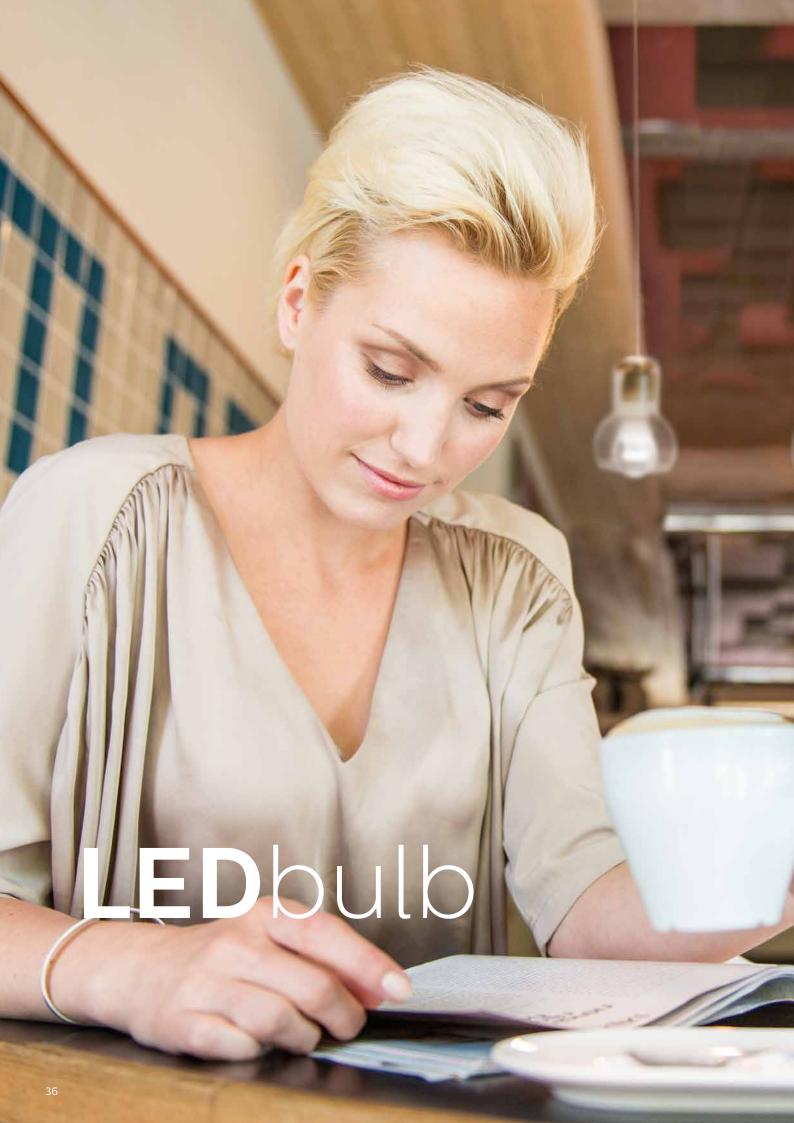







MASTER LEDbulb

The MASTER LEDbulb range delivers a dimmable warm light effect for a welcoming, warm atmosphere, making it ideal for general lighting applications. With DimTone the light gets warmer when dimmed which is especially suited for hospitality applications.

- · Clear bulb. Style has nothing to hide see page 65
- · High Performance Dimming see page 66
- Longest lifetime
- Superior light quality
- Maximum energy savings

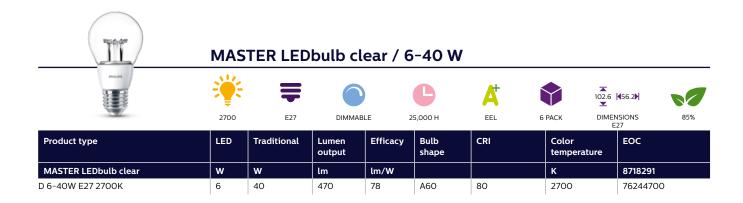


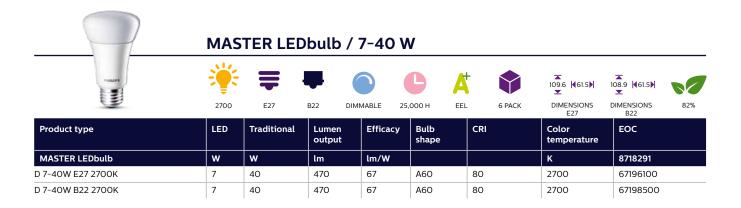





MASTER LEDbulb / 10-60 W



	2700	E27	B22 DIMM	MABLE 25,	000 H EEI	6 PACK	DIMENSIONS E27	DIMENSIONS 83% B22
Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDbulb	w	w	lm	lm/W			К	8718291
10-60W E27 2700K	10	60	806	81	A60	80	2700	76568400
10-60W B22 2700K	10	60	806	81	A60	80	2700	76570700



MASTER LEDbulb / 13-75 W



2700



















108.9 | 61.5



		1	1	ı	ı	I	E27	B22
Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDbulb	w	w	lm	lm/W			К	8718291
D 13-75W E27 2700K	13	75	1055	81	A67	80	2700	75852500
D 13-75W B22 2700K	13	75	1055	81	A67	80	2700	75854900



MASTER LEDbulb / 18-100 W

B22



E27















				E27 B22				
Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDbulb	w	w	lm	lm/W			К	8718291
18-100W E27 2700K	18	100	1521	85	A67	80	2700	75856300
18-100W B22 2700K	18	100	1521	85	A67	80	2700	75858700



 $Please\ refer\ to\ the\ site\ www.philips.com/masterledlamps\ for\ the\ latest\ information\ about\ dimming\ MASTER\ LEDlamps.$





CorePro LEDbulb

CorePro LEDbulbs are designed for retrofit replacements of incandescent bulbs, and are compatible with existing fixtures with E27 or B22 holders.

- Easy retrofit
- Long lifetime
- Huge energy saving
- Low heat generation



CorePro LEDbulb / 4-32 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	w	w	lm	lm/W			K	8718696
4-32W E27 3000K	4	32	350	88	A60	80	3000	41478100



CorePro LEDbulb / 5.5-40 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	w	w	lm	lm/W			К	8718696
5.5-40W E27 2700K	5.5	40	470	86	A60	80	2700	76395600



CorePro LEDbulb / 7-48 W





E27



B22



NON-DIMMABLE







6 PACK







Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	w	w	lm	lm/W			K	8718696
5.5-48W E27 3000K	7	48	600	92	A60	80	3000	79306900
6.5-48W B22 3000K	7	48	600	92	A60	80	3000	41480400



CorePro LEDbulb / 9-60 W











15,000 H





6 PACK







Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	w	w	lm	lm/W			K	8718291
9-60W E27 2700K	9	60	806	90	A60	80	2700	69583700
9-60W E27 3000K	9	60	806	90	A60	80	2700	75458900
9-60W B22 3000K	9	60	806	90	A60	80	3000	75460200



CorePro LEDbulb / 9.5-60 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	w	w	lm	lm/W			K	8718291
9.5-60W E27 2700K	9.5	60	806	85	A60	80	2700	74741300



CorePro LEDbulb / 10.5-75 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	w	w	lm	lm/W			K	8718696
10.5-75W E27 3000K	10.5	75	1055	101	A60	80	3000	41486600



CorePro LEDbulb / 11.5-75 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	W	w	lm	lm/W			K	8718696
11.5-75W E27 2700K	11.5	75	1055	92	A67	80	2700	41472900



CorePro LEDbulb / 15-100 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDbulb	w	w	lm	lm/W			К	8718696
15-100W E27 2700K	15	100	1521	101	A67	80	2700	41464400







MASTER LEDcandle DimTone

Thanks to a revolutionay new lens design, these candles now produce the most beautiful sparkling light. The ivory-colored design is a perfect match with existing luminaires.

- DimTone: the more you dim the warmer the light - see page 64
- Unique, eye-catching lens design
- · Also available in a classic candle design
- Huge energy savings



MASTER LEDcandle DimTone / 4-25 W



















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDcandle	w	w	lm	lm/W			K	8718696
DT 4-25W E14 827 B38 CL	4	25	250	63	B38	80	2700-2200	45368100



MASTER LEDcandle DimTone / 4-25 W




















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDcandle	w	w	lm	lm/W			К	8718696
DT 4-25W E14 827 BA38 CL	4	25	250	63	BA38	80	2700-2200	45376600



Please refer to the site www.philips.com/masterledlamps for the latest information about dimming MASTER LEDlamps.

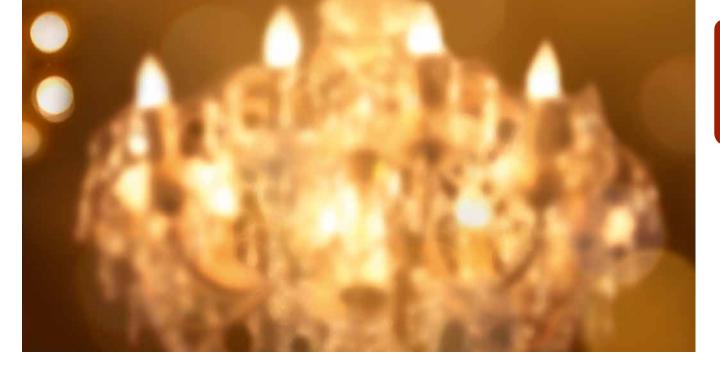



MASTER LEDcandle DimTone / 6-40 W



















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDcandle	w	w	lm	lm/W			К	8718696
DT 6-40W E14 827 B38 CL	6	40	470	78	B38	80	2700-2200	45350600



MASTER LEDcandle DimTone / 6-40 W























Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDcandle	w	w	lm	lm/W			К	8718696
DT 6-40W E14 827 BA38 CL	6	40	470	78	BA38	80	2700-2200	45354400



MASTER LEDcandle DimTone / 6-40 W



















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDcandle	W	w	lm	lm/W			К	8718696
DT 6-40W B22 827 B38 CI	6	40	470	78	B38	80	2700	45362900



CorePro LEDcandle

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps.

- · Non-Dimmable
- Frosted
- Huge energy savings



CorePro LEDcandle / 3-25 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDcandle	W	w	lm	lm/W			К	8718291
3-25W E14 2700K	3	25	250	83	B39	80	2700	78701300



CorePro LEDcandle / 6-40 W









15,000 H









Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDcandle	W	w	lm	lm/W			К	8718291
6-40W E14 2700K	6	40	470	78	B39	80	2700	76238600





_EDluster **MASTER LEDluster DimTone CorePro LEDluster** E14 / 4-25 W E14 / 6-40 W E14 / 3-25 W E14 / 6-40 W Page 52 Page 52 Page 50 Page 51 E27 / 6-40 W Page 50 Page 51 Page 52 Philips Professional LEDlamps catalog | 2nd quarter 2015



MASTER LEDluster DimTone

Thanks to a revolutionay new lens design, these candles now produce the most beautiful sparkling light. The ivory-colored design is a perfect match with existing luminaires.

- DimTone: the more you dim the warmer the light - see page 64
- · Unique, eye-catching lens design
- Huge energy savings



MASTER LEDluster DimTone / 4-25 W



















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDluster	w	w	lm	lm/W			К	8718696
DT 4-25W E14 827 P48 CL	4	25	250	63	P48	80	2700-2200	45378000



MASTER LEDluster DimTone / 4-25 W



















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDluster	W	w	lm	lm/W			К	8718696
DT 4-25W E27 827 P48 CL	4	25	250	63	P48	80	2700-2200	45380300



Please refer to the site www.philips.com/masterledlamps for the latest information about dimming MASTER LEDlamps.





MASTER LEDluster DimTone / 6-40 W



















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDluster	w	w	lm	lm/W			К	8718696
DT 6-40W E14 827 P48 CL	6	40	470	78	P48	80	2700-2200	45358200



MASTER LEDluster DimTone / 6-40 W





















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
MASTER LEDluster	w	w	lm	lm/W			К	8718696
DT 6-40W E27 827 P48 CL	6	40	470	78	P48	80	2700-2200	45360500



CorePro LEDluster

The frosted CorePro LEDluster is designed for retrofit replacement of incandescent lamps.

- · Non-Dimmable
- Huge energy savings
- Frosted



CorePro LEDluster / 3-25 W

















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDluster	W	w	lm	lm/W			К	8718291
3-25W E14 2700K	3	25	250	83	P48	80	2700	78703700



CorePro LEDluster / 3-25 W









15,000 H









Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDluster	w	w	lm	lm/W			К	8718291
3-25W E27 2700K	3	25	250	83	P48	80	2700	78705100



CorePro LEDluster / 6-40 W


















Product type	LED	Traditional	Lumen output	Efficacy	Bulb shape	CRI	Color temperature	EOC
CorePro LEDluster	W	w	lm	lm/W			К	8718291
6-40W E14 2700K	6	40	470	78	P48	80	2700	76240900









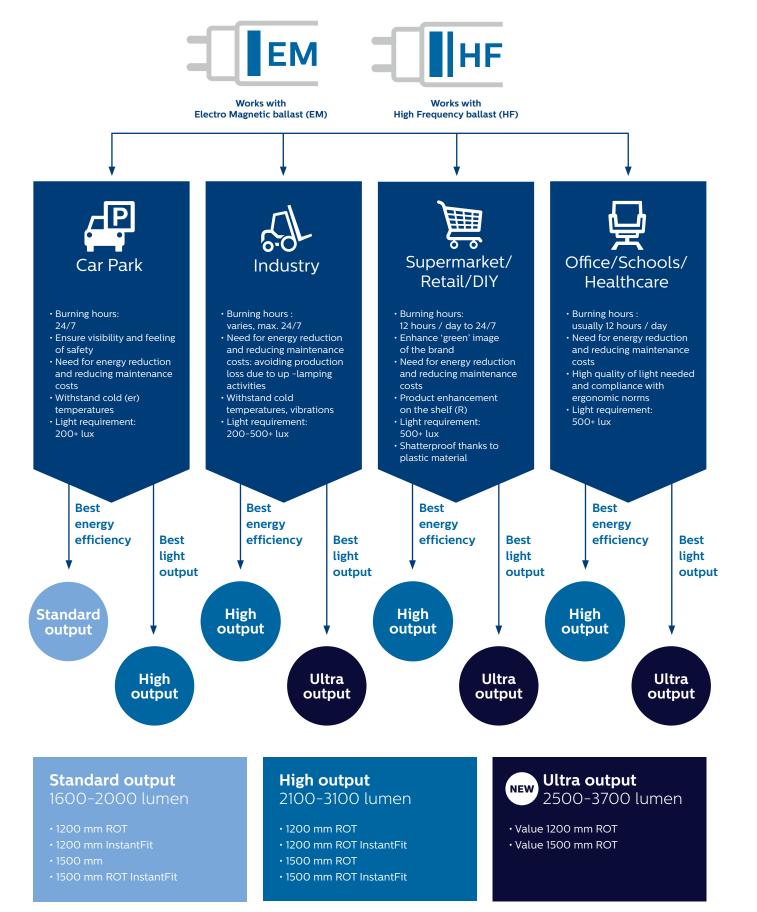



Rotating end-caps


To ensure maximum compatibility with existing luminaires, directional LEDtubes often need to be adjusted towards where light is needed most. That's why all new Philips MASTER products have this feature as standard. It allows the LEDtube to be easily rotated up to 90 degrees, giving you the freedom to direct the light to best effect.

G13

MASTER LEDtube

Whatever you need, the Philips MASTER LEDtubes portfolio has it all. We've repositioned the way that our lamps are labelled into three new categories of light output – Standard, High and Ultra output. A simple change that will make it even easier to choose the right lamp, for the right application. From best energy efficiency to the best light output. A simple switch, our LEDtubes come in a choice of lengths and color temperatures, with the option of rotating. So with Philips, you always have the right LEDtube every time.

InstantFit HF compatibility. No wires to replace, no hassle changing drivers; our InstantFit solution works with High Frequency electronic ballast, making it easy and safe for all installation methods. All you have to do is slot the tube into your existing fitting.

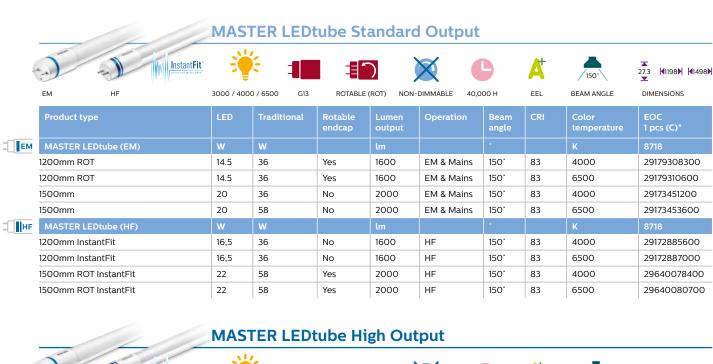

4	InstantFit*		=			× (A ⁺	150°	27.3 (1198) (1498)
	EM HF	3000 / 4000) / 6500 G13	ROTABLE (ROT) NON-I	DIMMABLE 40,0	000 H	EEL	BEAM ANGLE	DIMENSIONS
	Product type	LED	Traditional	Rotable endcap	Lumen output	Operation	Beam angle	CRI	Color temperature	EOC 1 pcs (C)*
EM	MASTER LEDtube (EM)	w	W		lm		٠		К	8718
	1200mm ROT	20	36	Yes	1900 lm	EM & Mains	150°	83	3000	29219870000
	1200mm ROT	20	36	Yes	2100 lm	EM & Mains	150°	83	4000	29642200700
	1200mm ROT	20	36	Yes	2100 lm	EM & Mains	150°	83	6500	29642202100
	1500mm ROT	23	58	Yes	2900 lm	EM & Mains	150°	83	3000	29178956700
	1500mm ROT	23	58	Yes	3100 lm	EM & Mains	150°	83	4000	29178958100
	1500mm ROT	23	58	Yes	3100 lm	EM & Mains	150°	83	6500	29178960400
HF	MASTER LEDtube (HF)	w	w		lm		٠		K	8718
NEW	1200 ROT InstantFit	18	36	Yes	2100 lm	HF	150°	83	4000	69647125800
	1200 ROT InstantFit	18	36	Yes	2100 lm	HF	150°	83	6500	69647127200
	1500mm ROT InstantFit	25	58	Yes	3100 lm	HF	150°	83	4000	29640886500
	1500mm ROT InstantFit	25	58	Yes	3100 lm	HF	150°	83	6500	29640888900

MASTER LEDtube Ultra Output



















	Product type	LED	Traditional	Rotable endcap	Lumen output	Operation	Beam angle	CRI	Color temperature	EOC 1 pcs (C)*
М	MASTER LEDtube (EM)	w	w		lm		٠		К	8718
	1200mm UO	20	36	Yes	2300	EM & Mains	150	83	3000	69646149500
	1200mm UO	20	36	Yes	2500	EM & Mains	150	83	4000	69646151800
	1200mm UO	20	36	Yes	2500	EM & Mains	150	83	6500	69646155600
	1500mm UO	25	58	Yes	3400	EM & Mains	150	83	3000	69646157000
	1500mm UO	25	58	Yes	3700	EM & Mains	150	83	4000	69646159400
	1500mm UO	25	58	Yes	3700	EM & Mains	150	83	6500	69646163100



MASTER LEDtube



3000 / 4000 / 6500







ROTABLE (ROT) NON-DIMMABLE



40.000 H



EEL





EM

Product type	LED	Traditional	Rotable endcap	Lumen output	Operation	Beam angle	CRI	Color temperature	EOC 1 pcs (C)*
MASTER LEDtube (EM)	w	w		lm		٠		К	8718
600mm series ROT	10	18	Yes	1000 lm	EM & Mains	150°	83	3000	69646143300
600mm series ROT	10	18	Yes	1050 lm	EM & Mains	150°	83	4000	69646141900
600mm series ROT	10	18	Yes	1050 lm	EM & Mains	150°	83	6500	69646145700
GA110 900mm	15	30	No	1250 lm	EM & Mains	140°	85	4000	29123880500
GA110 900mm	15	30	No	1250 lm	EM & Mains	140°	85	6500	29123882900
1800mm ROT	25	58	Yes	3700 lm	EM & Mains	150°	83	4000	69648037300





CorePro LEDtube

CorePro LEDtube is an affordable LED tube that is suitable for replacing T8 fluorescent lamps. This product is very suitable for cold rooms, back of house areas and carparks.



^{*)} incl. EMP







The right LEDtube every time









Whatever you need, the Philips MASTER LEDtube portfolio has it all. We've repositioned the way that our lamps are labelled into three new categories of light output — Standard, High and Ultra output. A simple change that will make it even easier to choose the right lamp, for the right application. From best energy efficiency to the best light output. A simple switch, our LEDtubes come in a choice of lengths and color temperatures, with the option of rotating end-caps. So with Philips, you always have the right LEDtube every time.

Spot on for **color enhancement**







With a high color rendering index of 90, the MASTER LEDspot MV is the perfect halogen replacement for retail applications. The single optics outshine other lamps with high intensity, high quality light that brings out the true colors in merchandise for an extra-long lifetime of 50,000 hours. Choose 4-35 W or 5.4-50 W in three color temperatures, all with high performance dimming and low energy consumption. So you can light up merchandise with LED.

Philips MASTER LEDspot

www.philips.com/masterledlamps

Quality, Value and lifetime





You've got it in one with the new range of MASTER LEDspot Value lamps. They offer high quality at an affordable price with a 25, 36 and 40 degree beam angle for general lighting applications. As a 20 W, 35 W or 50 W equivalent, with a choice of three color temperatures, dimmable options and a 25,000 and 35,000 hour lifetime, these lamps are everything you value in LED.

Philips MASTER LEDspot Value

www.philips.com/masterledlamps



DimTone – The more you dim, the warmer the light





DimTone takes LEDlamp dimming to an exciting next level with a beautiful, sunset-like effect. As the light is dimmed, DimTone reduces the color temperature from 2700 K down to 2200 K. This creates a warm, intimate ambience at lower light levels, with the same effect as dimmed halogens or incandescent lamps. So hotel, bar and restaurant owners can take advantage of energy-saving LED lighting and still create a natural, cozy ambience.

There's **innovation** in the air!




Airflux technology enables constant, passive cooling of the LEDs ensuring the highest light quality and color. Since the ventilator is taken out, Airflux allows more space for the best optical lenses and prevents distracting noises common to traditional active cooling products. Furthermore, Airflux prevent shadowing effects and guarntees a smooth, inclusion-free beam that high-end applications need.

- · High Performance Dimming
- Longest lifetime
- Superior light quality
- · Maximum energy savings
- No-noise cooling



Style has nothing to hide

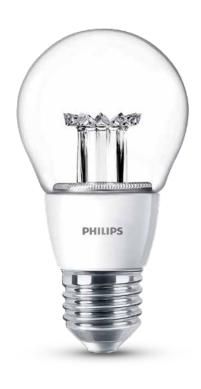

The clear classic goes LED

The incandescent bulb may be a thing of the past, but its sparkling warmth and beautiful shape has never gone out of style. Now you can recreate that look and feel with MASTER LEDbulb Clear 6-40 W, the first LED bulb to produce a magical, nostalgic ambience. The unique lens design creates a sparkling clear white light with smooth dimming and incredible scene setting. For 25,000 hours of elegant atmosphere that looks like incandescent, but lasts like LED.

High Performance Dimming

Thanks to High Performance Dimming you will enjoy smooth, flicker-free dimming. MASTER LEDlamps have been tested with all the major dimmer brands in the market.

- Broad dimmer compatibility supporting a wide range of normal phase-cut dimmers: wall box dimmers, panels, plug-in unit phase-cut dimming
- · High dimming performance: smooth dimming curve, deeper dimming level, one to multiple lamps

Note: To ensure high dimming performance with the MASTER LEDspot MV GU10 8 W these lamps should not be connected with other lamp types on the same dimmer ('mixed load').

TransforMax (patented)

First class halogen transformer compatibility thanks to intelligent electronics within low voltage LEDlamps.


Philips designed a unique (patent protected) intelligent driver concept for low voltage (12 V) LEDlamps, which enables broad compatibility with existing electronic and electromagnetic Halogen transformers. Therefore, Philips low voltage (12 V) LEDlamps universally replace 12 V Halogen spot lamps with unique first class transformer compatible electronics. This technology is called TransforMax which enables the lamp to work on most sockets — a simple 'plug & play' retrofit solution.

Without dimmer

With dimmer

In case dimmable low voltage LEDlamps have to be connected to a dimmer, the following approach has to be followed:

- 1) Determine the max loading of both your transformer(s) and your dimmer: in Watts (W).
- 2) Use the ratios below to determine a 'System Max' and 'Branch Max'
- 3) Limit total lamps you can install by 'System Max'...
- 4) ...and ensure transformer load is sufficient to allow for each individual 'Branch'

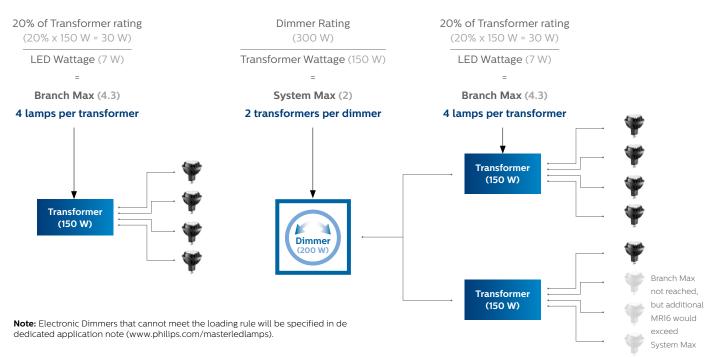




Please refer to the site www.philips.com/masterledlamps for the latest information about transformer compatibility.

Photometric diagrams

This is a selection of the photometric diagram visualisations. Please visit www.philips.com/masterledlamps for photometric .ies files of all current products.

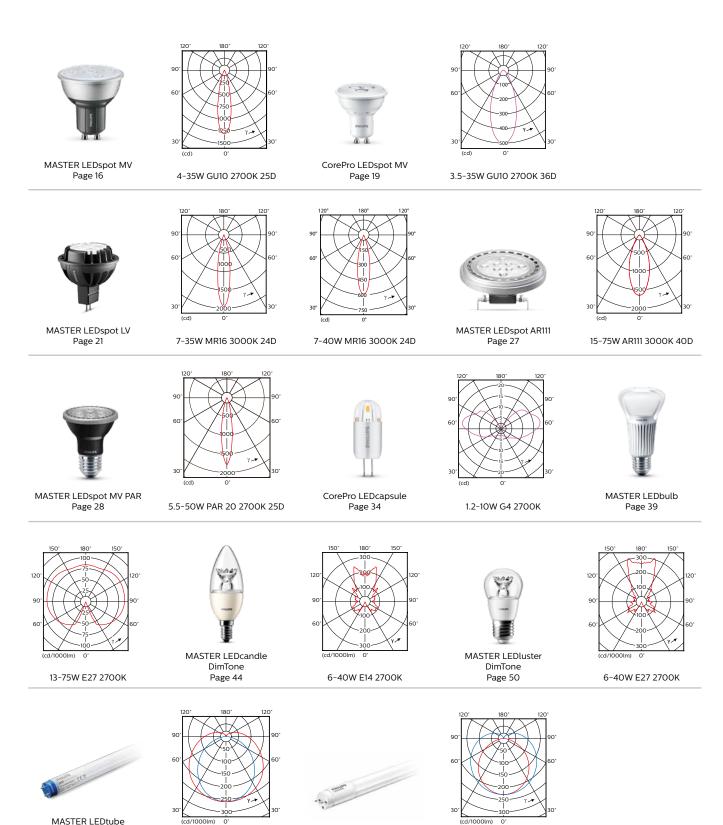

CorePro LEDtube

Page 60

Ultra output

Page 58

18W G13 6500K

10W G13 6500K



© 2015 Royal Philips N.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication. Data are subject to change.

www.philips.com/masterledlamps www.philips.com/ledtube