

INSTALLATION INSTRUCTIONS

RETRO FIT EH, H14, H19 LED

WARNING: RISK OF FIRE OR ELECTRIC SHOCK. REFLECTOR KIT INSTALLATION REQUIRES KNOWLEDGE OF HID LIGHTING LUMINAIRES ELECTRICAL SYSTEMS. IF NOT QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A QUALIFIED ELECTRICIAN.

WARNING: RISK OF FIRE OR ELECTRIC SHOCK. INSTALL THIS KIT ONLY IN THE LUMINAIRES THAT HAS THE CONSTRUCTION FEATURES AND DIMENSIONS SHOWN IN THE PHOTOGRAPHS AND/OR DRAWINGS.

CAUTION: DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.

WARNING: TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS.

DATE: 9/7/2011 P/N: A819908

PHILIPS



GARDCO LIGHTING

1611 Clovis Barker RD
San Marcos, TX 78666

Gardco & Emco are PHILIPS Group Brand


COPYRIGHT 2010 GARDCO LIGHTING

SHEET 1 OF 4

INSTALLATION INSTRUCTIONS

RETRO FIT EH,H14,19 LED

PARTS USED FOR FORM 10 LED RETRO FIT

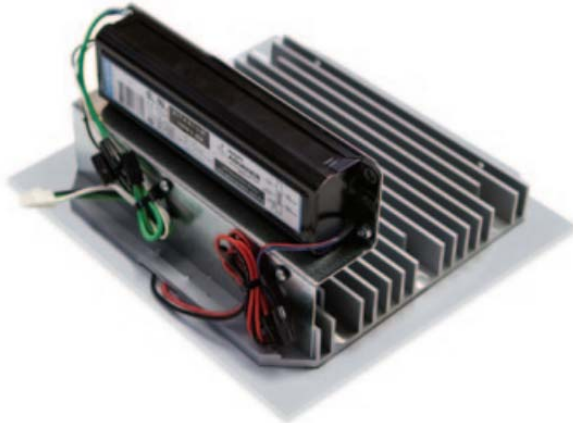

FORM 10 14" SQUARE RETRO FIT KIT




FORM 10 19" SQUARE RETRO FIT KIT

STEP 1: GAIN ACCESS TO INTERNAL COMPONENTS BY OPENING DOOR BY SLIDING LATCHES TO OPEN DOOR INWARD



STEP 2: REMOVE LAMP AND THEN REMOVE REFLECTOR BY RELEASING HINGES

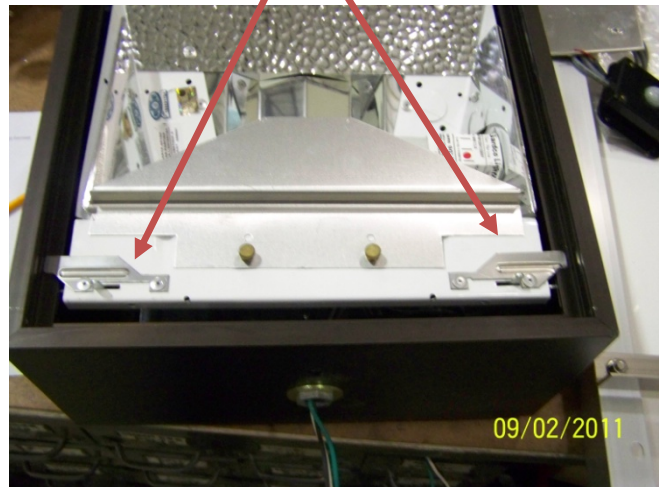

USE LATCH TO REMOVE DOOR FRAME FROM



GARDCO LIGHTING
1611 Clovis Barker RD
San Marcos, TX 78666

Gardco & Emco are PHILIPS Group Brand

COPYRIGHT 2010 GARDCO LIGHTING

DATE: 9/7/2011 P/N: A819908

SHEET 2 OF 4



INSTALLATION INSTRUCTIONS

RETRO FIT EH,H14,19 LED

STEP 3: DISENGAGE QUICK DISCONNECTS AND REMOVE REFLECTOR ASSEMBLY



STEP 4: REMOVE BALLAST ASSEMBLY BY DISCONNECTING THREE LINE LEADS AND REMOVING SCREWS USED TO HOLD THE BALLAST TRAY AND GROUND WIRE AS SHOWN.

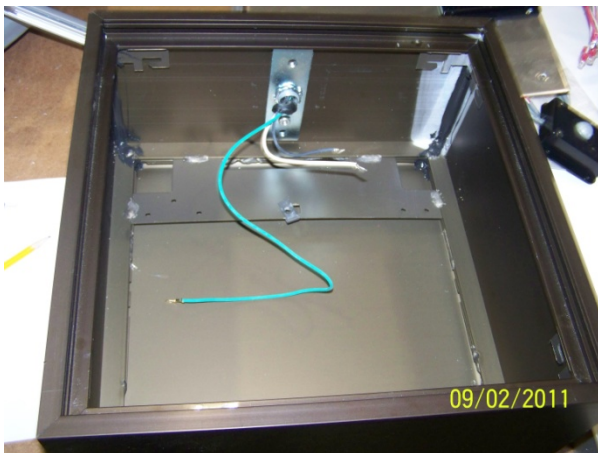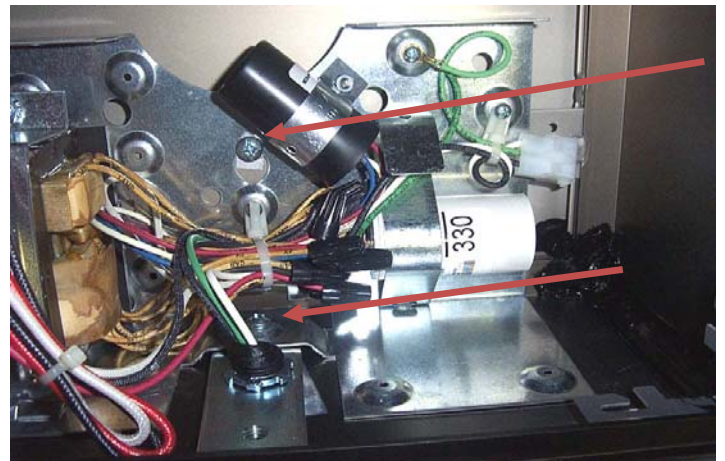

TIE CONNECTOR INTO LEADS BY CONNECTING LIKE COLORS AND SECURING WITH WIRE NUT.



GARDCO LIGHTING
1611 Clovis Barker RD
San Marcos, TX 78666

Gardco & Emco are PHILIPS Group Brand

COPYRIGHT 2010 GARDCO LIGHTING


DATE: 9/7/2011 P/N: A819908

SHEET 3 OF 4


INSTALLATION INSTRUCTIONS

RETRO FIT EH,H14,19 LED

STEP 5: ENGAGE HINGE SIDES INTO HOUSING AS SHOWN. MAKE CONNECTIONS TO DRIVER. BLACK TO BLACK & WHITE TO WHITE

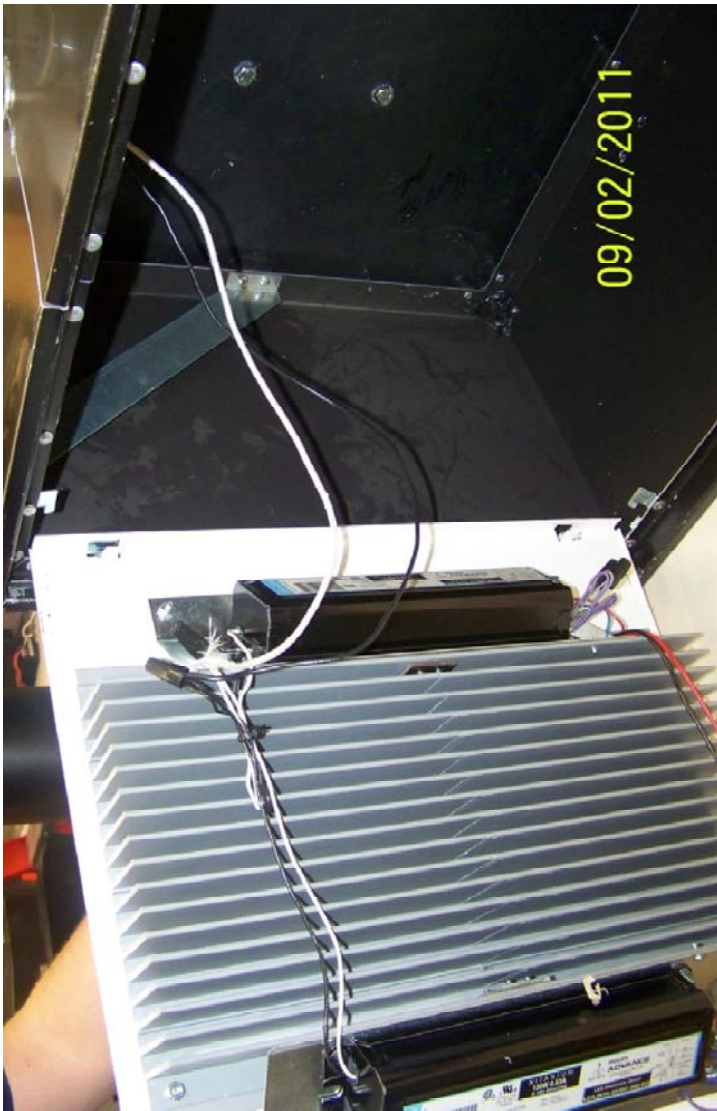

STEP 6: SWING LIGHT ENGINE ASSEMBLY INTO PLACE MAKING SURE THE TWO LATCHES ENGAGE HOUSING

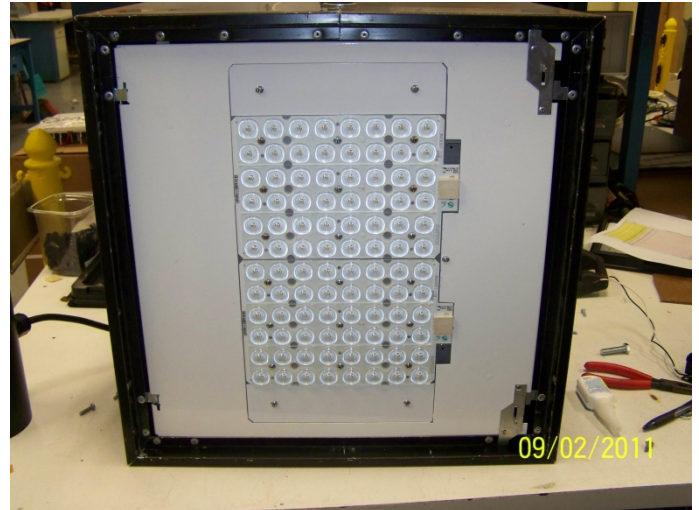

STEP 7: REPLACE DOOR AND CLOSE



PHILIPS



GARDCO LIGHTING

1611 Clovis Barker RD
San Marcos, TX 78666

Gardco & Emco are PHILIPS Group Brand

COPYRIGHT 2010 GARDCO LIGHTING

DATE: 9/7/2011

P/N: A819908

SHEET 4 OF 4