



# DDNG-BACnet

**BACnet Network Gateway** 

# High level BACnet network integration


The Philips Dynalite DDNG-BACnet enables high level integration between a Philips Dynalite system and any building management system (BMS) that uses the BACnet protocol.


# DDNG-BACnet

### High level BACnet network integration

- **Direct control of lighting system** Permits direct control of the lighting system via the building's BMS network.
- Interrogation ability Allows interrogation of any area within the network for feedback of current lighting status.
- **Scalable functionality** Provides solutions suitable for both small and large scale installations.

### **Dimensions**

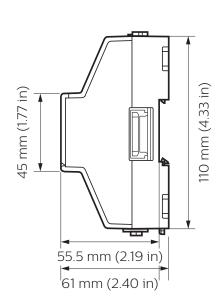

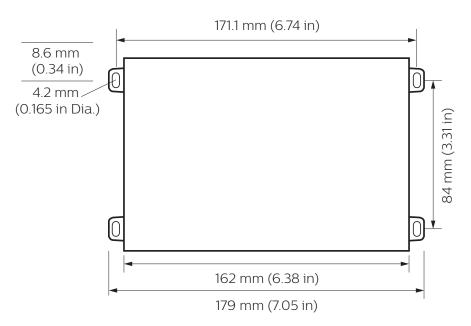

 $\begin{tabular}{ll} Specifications \\ Due to continuous improvements and innovations, specifications may change without notice. \\ \end{tabular}$ 



### **Electrical**

| Liectificat         |  |  |
|---------------------|--|--|
| Supply Type         | AC/DC Class 2 external supply (not included)   |  |
| Supply Voltage      | 24 VAC/VDC   |  |
| Supply Current      | 1A   |  |
| Control             |  |  |
| Serial Ports        | 2 x RS-485<br>1 x USB 2.0 Type A<br>1 x USB micro-A  |  |
| Communication Ports | 2 x Ethernet (10/100 baseT)  |  |
| Supported Protocols | DyNet<br>BACnet<br>IPv4  |  |
| User Input          | 1 x USB backup/recovery button<br>1 x shutdown button<br>2 x RS-485 bias switches  |  |
| Indicators          | 2 x RS-485 Tx/Rx LED (RS485-A/B)<br>1 x power LED (STAT)<br>1 x heartbeat LED (BEAT)<br>2 x Ethernet link/activity LED(LAN1/2) |  |

### **Physical**

| Dimensions (H x W x D)                   | 110 x 179 x 61 mm (4.33 x 7.05 x 2.40 in) |  |
|--|---|--|
| Packed Weight                            | 0.61 kg (1.34 lb)                         |  |
| Construction                             | Low profile DI                            | N rail polycarbonate (10 unit)   |
| Serial Ports                             | 2 x 3-v                                   | vay pluggable screw terminal   |
| Serial Port Conductor Size               |   | 2.5 mm <sup>2</sup> (#12 AWG) (max)  |
| Communication Ports                      |   | 2 x RJ45   |
| Supply Terminals                         |   | vay pluggable screw terminal<br>lade lug (connector supplied)<br>1 x barrel connector jack |
| Supply Terminal Conductor Size           |   | 2.5 mm <sup>2</sup> (#12 AWG) (max)  |
| Barrel Connector Plug size (L x OD x ID) |   | 9.5 x 5.5 x 2.1 mm<br>(0.37 x 0.22 x 0.83 in)  |
|  |   |  |
| Environment*                             |   |  |

### Compliance

IEC Pollution Degree

Humidity

1 x backup LED (BACKUP)

Certification CE, RCM, UL/cUL, FCC, ICES, UKCA, RoHS

-20° to 60°C ambient (-4° to 140°F)

-40° to 85°C ambient (-40° to 185°F)

5 to 95% non-condensing

Operating Temperature Storage/Transport Temperature









<sup>\*</sup> For indoor installation only

## Ordering Code

| Product  | Philips 12NC |
|--|--------------|
| DDNG-BACnet (N4 Platform, 25 Devices / 1250 Points)                | 913703247009 |
| Accessories  |              |
| BACNET-DRIVER  | 913703097109 |
| (License to enable DyNet driver on compatible Tridium JACE devices | 5)           |



© 2021 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Revision 05 2021-09-10 lighting.philips.com/dynalite