
# PHILIPS LIGHTOLIER

# Track Heads

CorePro LED Mini Cylinder



| Project:  |      |
|-----------|------|
| Location: |      |
| Cat.No:   |      |
| Туре:     |      |
| Lamps:    | Qty: |
| Notes:    |      |

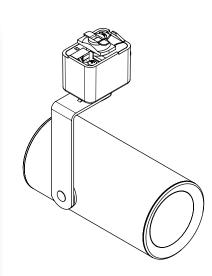

#### **Ordering guide**

example: LT08RNF830AL or LT08RNF930ALCW

| Series                          | Track Adapter Lumens  |                 | Beam Spread                                    | CRI/CCT   | Finish   | Options   |  |  |  |
|---------------------------------|---|-----------------|--|---|--|---|--|--|--|
| LT                              | 08  |                 |  |   |  |   |  |  |  |
| LT CorePro LED<br>Mini Cylinder | <ul> <li>Lightolier (leave blank)</li> <li>C Capri<sup>1</sup></li> <li>H Halo</li> <li>J Juno</li> </ul> | <b>08</b> 700lm | RNF Narrow Flood (20°)<br>RWF Wide Flood (35°) | 827 80CRI/2700K<br>830 80CRI/3000K<br>930 90CRI/3000K | AL Aluminum <sup>1</sup><br>BK Black<br>WH White | CW CrispWhite <sup>2</sup><br>— None<br>(leave blank) |  |  |  |

luminaire design offers efficacy up to 80lm/w.

1. The Capri (C) track adapter is not available with the Aluminum (AL) finish option.

2. The CrispWhite (CW) option is available for the 90 CRI/3000 K (930) CRI/CCT configuration only.

For other configurations and variations please contact the factory

### Features

- 1. **Track attachment fitting:** Molded polycarbonate Integral color in gray, black or white. Rotates into place with the use of a push tab.
- 2. **Push tab:** Molded polycarbonate. Locks and detaches unit.
- 3. **Drive and optic housing:** Extruded aluminum. Steel eyelet friction connection. Rotates 180°.
- 4. Movable contact: Solid brass. Extends for connection to 2nd circuit in Advent track.
- 5. Ground contact: Solid brass.
- 6. Integrated heat sink: Passive cooling, integrated into optic and driver housing.
- 7. **Optics:** Single optic TIR (total internal reflection) optically clear thermoplastic. Prevents dust and contaminants from entering the luminaire.
- 8. Light source: Single Luxeon 1203 chip on board light emitting diode.
- 9. Finish: Powder coat finish.

## **CrispWhite Technology**

#### Available in 90CRI/3000K only

The Lumileds 90CRI CrispWhite technology combines the warm, saturated colors of high CRI with crisp and vibrant whites. The small form factor and high quality of light make this an impactful option for retail display areas.

### Electrical

Electronic power supply Input voltage: 120, 50/60Hz Input power: 8-9W High Power factor: 0.99 Lumen Maintenance: >70% of initial lumens at 50,000hrs. Photometric performance: Tested in accordance with LM79.

| Catalog Number | Beam Angles      | Flux | Power | Efficacy | СВСР |  |  |
|----------------|------------------|------|-------|----------|------|--|--|
| LT08RNF830     | 20° Narrow Flood | 633  | 8.9W  | 71.1     | 2926 |  |  |
| LT08RWF830     | 35° Wide Flood   | 702  | 8.9W  | 78.9     | 1537 |  |  |

# Dimming

The Philips Lightolier CorePro LED Mini Cylinder is a completely integrated LED luminaire. By combining the optics, light source, thermal management system and driver into a single housing, this luminaire provides a sleek look suitable for lower mounting heights and smaller spaces. This small, sleek

**Trailing Edge (ELV) dimming compatibility** Philips SR400RPC120 (100% - 0.26%) Lutron Skylark S-300P (100% - 0.48%) Lutron MAELV-600 (100% - 0.16%) Leviton Illumatech IPE04 (100% - 0.18%)

#### Labels


cULus listed. 5 year warranty. ENERGY STAR® certified.



# LT08 Corepro LED Mini Cylinder

2<sup>1</sup>/4" Aperture, 8.9W, 700lm track head

### Dimensions

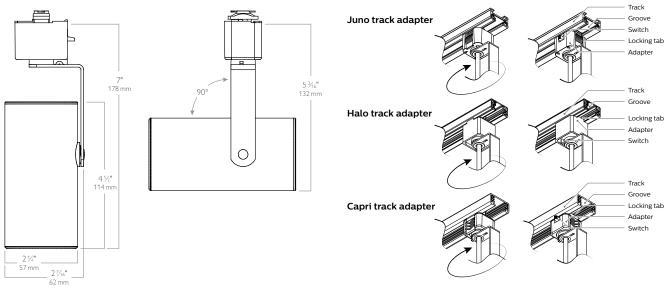


### LT08RNF830WH & LT08RWF830WH • 8.9W LED, 3000K, Narrow and Wide, 700 lumen


#### Aiming angle

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam. Data shown is for 3000K.


L = Beam length A = Aiming angle W = Beam width FC = Footcandles D = Distance CBCP = Center Bea


C = Distance to center beam center of the is for 3000K. A = Aiming angle FC= Footcandles CBCP = Center Beam Candle Power





0° horizontal aiming angle 30° horizontal aiming angle





30° vertical aiming angle 45° vertical

45° vertical aiming angle

|              | Beam<br>spread<br>(To 50% CBCF | CBCP  | Rated<br>Life (hrs.) | D        | с            | FC       | L            | w            | D        | с            | FC       | L            | w            | D        | с            | FC       | L             | w            | D  | с            | FC       | L           | w           |
|--------------|--------------------------------|-------|----------------------|----------|--------------|----------|--------------|--------------|----------|--------------|----------|--------------|--------------|----------|--------------|----------|---------------|--------------|----|--------------|----------|-------------|-------------|
|              | ٨                              |       |                      | 5'       | 0.0′         | 117      | 1.9'         | 1.9′         | 5'       | 2.9′         | 76       | 2.5′         | 2.1′         | 2'       | 2.6'         | 163      | 2.5'          | 1.1′         | 2' | 2.0'         | 259      | 1.5′        | 1.0′        |
|              |                                |       |                      | 6'       | 0.0'         | 81       | 2.2'         | 2.2'         | 6'       | 3.5′         | 53       | 3.0'         | 2.6'         | 2'       | 3.5'         | 91       | 3.3'          | 1.5′         | 3' | 3.0'         | 115      | 2.3'        | 1.6′        |
| LT08RNF830   | 11                             |       |                      | 7'       | 0.0'         | 60       | 2.6'         | 2.6'         | 7'       | 4.0'         | 39       | 3.5'         | 3.0'         | 3'       | 5.2'         | 41       | 5.0'          | 2.2'         | 4' | 4.0'         | 65       | 3.1'        | 2.1'        |
| Narrow Flood | 21°                            | 2,926 | 50,000               | 8′       | 0.0'         | 46       | 3.0′         | 3.0′         | 8′       | 4.6'         | 30       | 4.0'         | 3.4′         | 4'       | 6.9′         | 23       | 6.6′          | 3.0′         | 5' | 5.0′         | 41       | 3.8′        | 2.6'        |
|              |                                |       |                      | D        | с            | FC       | L            | w            | D        | с            | FC       | L            | w            | D        | с            | FC       | L             | w            | D  | с            | FC       | L           | w           |
|              | ٨                              |       |                      | 5'       | 0.0'         | 61       | 3.2'         | 3.2'         | 5'       | 2.9′         | 40       | 4.3'         | 3.6'         | 2'       | 2.6'         | 85       | 5.4'          | 1.9′         | 2' | 2.0'         | 136      | 2.8′        | 1.8′        |
|              | ~ ^ ~                          |       |                      |          |              |          |              |              |          |              |          |              |              |          |              |          |               |              |    | 2.01         | 60       | 4 2'        | 27          |
|              |                                |       |                      | 6'       | 0.0'         | 43       | 3.8′         | 3.8′         | 6'       | 3.5′         | 28       | 5.2'         | 4.4'         | 2'       | 3.5′         | 48       | 7.2'          | 2.5'         | 3' | 3.0'         | 60       | 4.2         | 2.7         |
| LT08RWF830   | , /\                           |       |                      | 6'<br>7' | 0.0'<br>0.0' | 43<br>31 | 3.8'<br>4.4' | 3.8'<br>4.4' | 6'<br>7' | 3.5′<br>4.0′ | 28<br>20 | 5.2′<br>6.1′ | 4.4'<br>5.1' | 2'<br>3' | 3.5'<br>5.2' | 48<br>21 | 7.2'<br>10.8' | 2.5'<br>3.8' | 3' | 3.0'<br>4.0' | 60<br>34 | 4.2<br>5.6' | 2.7<br>3.6' |

© 2014 Koninklijke Philips N.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication. philips.com/luminaires



Philips Lighting, North America Corporation 200 Franklin Square Drive, Somerset, NJ 08873 Tel. 855-486-2216

Imported by: Philips Lighting, A division of Philips Electronics Ltd. 281 Hillmount Rd, Markham, ON, Canada L6C 2S3 Tel. 800-668-9008

LT08 03/16 page 2 of 2