



# Product Description

## EXC for SOX

One-piece, compact, lightweight high-frequency electronic ballast

### Benefits

- Provides equivalent light output to conventional technologies, with up to 36% lower energy consumption
- Replaces electromagnetic ballast, ignitor and capacitor
- Easy design-in due to slim cross-section and low weight; easy installation and cabling

### Features

- Up to 93% system efficiency
- Constant light output at mains voltages between approximately 200 and 255 V
- One compact component
- Slim cross-section and low weight
- Single-insert contacts

### Application

- Public Lighting outdoor: road, residential, tunnel
- Climatic suitability: restricted to built-in situations where relative humidity is limited (in luminaires min. IP 54)


## EXC for SOX

### Versions



EXC 35 SOX 220-240V 50/60Hz

### Dimensional drawing

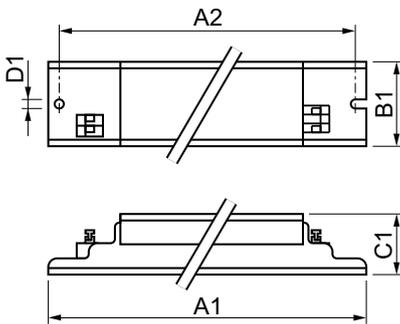

Product	D1	C1	A1	A2	B1
EXC 55 SOX 220-240V 50/60Hz	4.2 mm	28.0 mm	280.0 mm	265.0 mm	40.0 mm

