



# HID-EXC for SOX

## EXC for SOX

Electronic drivers for SOX lamps; designed to save energy and reduce maintenance costs

### Benefits

### Features

### Application


### Versions



EXC 35 SOX 220-240V 50/60Hz

# EXC for SOX

## Dimensional drawing

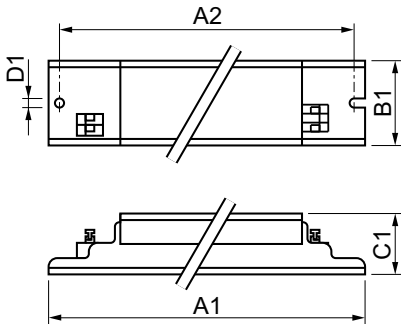

### Product

EXC 91 SOX-E 220-240V 50/60Hz
EXC 66 SOX-E 220-240V 50/60Hz
EXC 35 SOX 220-240V 50/60Hz
EXC 36 SOX-E 220-240V 50/60Hz
EXC 55 SOX 220-240V 50/60Hz

### Operating and Electrical

Input Frequency	50 to 60 Hz
Input Voltage	220 to 240 V

### General Information

Number Of Lamps	1 piece/unit
-----------------	--------------

## General Information

Order Code	Full Product Name	Number Of Products On MCB (16A Type B) (Nom)	Lamp Type
913700621466	EXC 35 SOX 220-240V 50/60Hz	30	SOX
913700621566	EXC 36 SOX-E 220-240V 50/60Hz	30	SOX-E
913700621666	EXC 55 SOX 220-240V 50/60Hz	22	SOX

Order Code	Full Product Name	Number Of Products On MCB (16A Type B) (Nom)	Lamp Type
913700621766	EXC 66 SOX-E 220-240V 50/60Hz	22	SOX-E
913700621866	EXC 91 SOX-E 220-240V 50/60Hz	12	SOX-E

## Mechanical and Housing

Order Code	Full Product Name	Housing
913700621466	EXC 35 SOX 220-240V 50/60Hz	L 280x39x28
913700621566	EXC 36 SOX-E 220-240V 50/60Hz	L 280x39x28
913700621666	EXC 55 SOX 220-240V 50/60Hz	L 280x39x28

Order Code	Full Product Name	Housing
913700621766	EXC 66 SOX-E 220-240V 50/60Hz	L 280x39x28
913700621866	EXC 91 SOX-E 220-240V 50/60Hz	L 335x39x28

## System characteristics

Order Code	Full Product Name	Lamp		
		Power On SOX	Lamp Power On SOX-E	Rated Ballast- Lamp Power
913700621466	EXC 35 SOX 220-240V 50/60Hz	34.0 W	-	35 W
913700621566	EXC 36 SOX-E 220-240V 50/60Hz	-	36.0 W	36 W
913700621666	EXC 55 SOX 220-240V 50/60Hz	52.0 W	-	55 W

Order Code	Full Product Name	Lamp		
		Power On SOX	Lamp Power On SOX-E	Rated Ballast- Lamp Power
913700621766	EXC 66 SOX-E 220-240V 50/60Hz	-	67.0 W	66 W
913700621866	EXC 91 SOX-E 220-240V 50/60Hz	-	87.0 W	91 W

