



CoreLine Trunking – the clear choice for LED

CoreLine Trunking

Whether for a new facility or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Trunking range of LED products can be used to replace general lighting. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Benefits

- High efficiency enables energy savings of more than 50% compared to fluorescent-based luminaires; attractive investment level and fast payback
- Good quality of light with high output to meet the requirements of demanding applications
- Easy to order and install, thus requiring less time and reducing packaging waste and complexity

Features

- Philips Fortimo LED Line 1R for high efficiency and reliability
- Advanced optics enable precise and energy-saving beam shapes
- Simplicity: only two 12 NC codes needed to make a light line
- Requires much less packaging than fluorescent, reducing total installation time

Application

- Supermarkets
- Warehouses
- Production facilities

Specifications

CoreLine Trunking

| | |
|--|---|
| Type | LL120X (3.4 m version) |
| | LL120X (3.4 m standalone version: ready-to-install (KIT) with ceiling-mounting bracket (SMB)) |
| | LL121X (1.7 m version) |
| | LL121X (1.7 m standalone version: ready-to-install (KIT) with ceiling-mounting bracket (SMB)) |
| | LL122X (3.4 m half blind version) |
| | LL123X (3C track version) |
| Light source | Philips Fortimo LED Line 1R |
| Power | LL120X: 69 or 124 W |
| | LL121X: 34.5 or 62 W |
| Beam angle | 2 x 20, 2 x 25, 2 x 30, 2 x 45, 2 x 50, 2 x 80, 1 x 30° |
| Luminous flux | LL120X: 9000 or 16000 lm for 4000 and 6500 K, 15200 lm for 3000 K |
| | LL121X: 4500 or 8000 lm for 4000 and 6500 K, 7600 lm for 3000 K |
| Correlated Color Temperature | 3000, 4000 and 6500 K |
| Color Rendering Index | >80 |
| Lumen maintenance at median useful life* | L80 |
| 50000 h | |
| Control gear failure rate at median useful life | 5% |
| 50000 h | |
| Performance Ambient Temperature Tq | +25 °C |

| | |
|------------------------------------|--|
| Operating temperature range | -20 to +35 °C |
| Driver | Built-in (Philips Xitanium) |
| Mains voltage | 230 or 240 V / 50-60 Hz |
| Dimming | DALI dimmer |
| Controls system input | 0-16 V |
| Material | Housing: steel |
| | Lenses: PMMA or polycarbonate (for emergency lighting versions) |
| Color | White |
| Optic | Narrow, medium, wide beam, asymmetric, double asymmetric and opal optic |
| Optical cover | PMMA or polycarbonate |
| Connection | Integral male / female connectors |
| Maintenance | No internal cleaning required |
| Installation | Suspended with brackets and wire (standard) |
| | Surface mounted with caddy clip or bracket (additional accessories needed) |
| | Through-wiring standard |
| Accessories | Blind covers, chain brackets, profile brackets, mounting brackets for suspension wire and ceiling mounting brackets, suspension wire, electrical connectors (LL120Z) |
| Remarks | Emergency lighting versions battery based (3 hours, EL3) or centrally driven emergency |

Versions



CoreLine trunking LL122X luminaire, half blind cover and half double lumen version




CoreLine trunking LL120X/LL121X luminaire, single lumen version, opal



CoreLine Trunking

CoreLine Trunking

Dimensional drawing

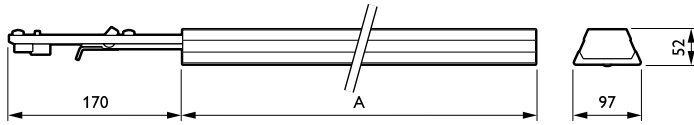

//

| Product | |
|--|---------|
| LL121X LED45S/840 1x PSU MB 5 WH | |
| LL120X LED90S/840 2x PSD NB 7 VLC WH | 3450 mm |
| LL121X LED45S/840 1x PSD DA20 7 WH | 1725 mm |
| LL121X LED45S/840 1x PSU WB 5 WH | |
| LL120X LED90S/840 2x PSU DA20 5 WH | |
| LL120X LED90S/840 2x PSU NB 5 WH | |
| LL121X LED45S/840 1x PSU NB 5 WH | |
| LL120X LED90S/840 2x PSU MB 5 WH | |
| LL120X LED90S/840 2x PSU WB 5 WH | |
| LL121X 7 WH BC | |
| LL120X LED90S/840 2x PSD DA20 7 VLC WH | 3450 mm |
| LL120X LED90S/840 2x PSU VWB 5 WH | 3450 mm |
| LL121X LED45S/840 1x PSU DA20 5 WH | |

| Product | A |
|--|---------|
| LL120X LED90S/840 2x PSD NB 7 VLC WH | 3464 mm |
| LL121X LED45S/840 1x PSD DA20 7 WH | 1739 mm |
| LL121X 7 WH BC | |
| LL120X LED90S/840 2x PSD DA20 7 VLC WH | 3464 mm |
| LL120X LED90S/840 2x PSU VWB 5 WH | 3464 mm |

//

//

| Product | A |
|--|---------|
| LL120X LED90S/840 2x PSD NB 7 VLC WH | 3724 mm |
| LL121X LED45S/840 1x PSD DA20 7 WH | 1999 mm |
| LL121X 7 WH BC | |
| LL120X LED90S/840 2x PSD DA20 7 VLC WH | 3724 mm |
| LL120X LED90S/840 2x PSU VWB 5 WH | 3724 mm |

CoreLine Trunking

Product details

Ceiling mounting bracket, 2 end pieces and connection unit 7-pole



Suspension wire Ø 2 mm, length 3 m



LineSense motion detection unit



Suspension wire Ø 2 mm, length 1.25 m



Mounting bracket for suspension wire, 2 end pieces and connection unit 9-pole



Chain bracket, 5 pieces



End pieces, 6 pieces



Suspension wire Ø 2 mm, length 5 m




CoreLine Trunking

Product details

Profile bracket, 5 pieces



Electrical connector 9-pole male and female, 4 sets



CoreLine trunking LL122X luminaire, half blind cover and half single lumen version



IPDP_LL120Xi_0015-Detail photo



CoreLine trunking LL121X housing with blind cover



CoreLine Trunking

Product details



CoreLine trunking LL120X/LL121X luminaire, single lumen version, opal



CoreLine trunking LL120X/LL121X luminaire, double lumen version, opal



IPDP_LL120Xi_0003-Detail photo



CoreLine trunking LL123X luminaire, track version



Accessories



Mounting bracket for suspension wire, 2 pieces

Ordercode 88155199



Mounting bracket for suspension wire, 2 end pieces and connection unit 7-pole

Ordercode 88146900

CoreLine Trunking

Accessories

Ceiling mounting bracket

Ordercode 910925255037,
910925255170



Suspension wire Ø 2 mm, length
1,25 m

Ordercode 88157599



Suspension wire Ø 2 mm, length 3
m

Ordercode 88158299




Suspension wire Ø 2 mm, length 5
m

Ordercode 88159999



Electrical connector 7-pole male
and female, 5 sets

Ordercode 88160599



Chain bracket, 5 pieces

Ordercode 88161299



End pieces, 6 pieces

Ordercode 88153700



Profile bracket, 5 pieces

Ordercode 88163699



CoreLine Trunking

Accessories



Ceiling mounting bracket, 2 end pieces and connection unit 7-pole

Ordercode 90872200



Mounting bracket for suspension wire, 2 end pieces and connection unit 9-pole

Ordercode 91260600



CoreLine trunking LL120X/LL121X luminaire, single lumen version

Ordercode 910925682907, 910925682908, 910925682914, 910925682915, 910925682920, 910925682921, 910925682926, 910925682927, 910925682933, 910925682946, 910925682947, 910925682955, 910925682968, 910925683021, 910925683072, 910925772904, 910925802903, 910925863110, 910925863325, 910925863332, 910925863334



CoreLine Trunking

Ordercode 910925683073, 910925863969, 910925864022



CoreLine Trunking

Ordercode 910925863234, 910925863235, 910925863236, 910925863237

Application Conditions

Suitable for random switching No

Approval and Application

Mech. impact protection code IK02

Ingress protection code IP20

Operating and Electrical

Input Voltage 220 to 240 V

General Information

Beam angle of light source 120 °

CE mark CE mark

Protection class IEC Safety class I (I)

Driver included Yes

ENEC mark ENEC mark

Flammability mark F

Light source replaceable No

Service tag Yes

Initial Performance (IEC Compliant)

Initial chromaticity (0.38, 0.38) SDCM

<3

Init. Color Rendering Index ≥80

Application Conditions

| Order Code | Full Product Name | Ambient temperature range | Maximum dim level |
|------------|--|---------------------------|-------------------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | -20 to +35 °C | - |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | -20 to +35 °C | - |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | -20 to +35 °C | Not applicable |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | -20 to +35 °C | - |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | -20 to +35 °C | Not applicable |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | -20 to +35 °C | - |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | -20 to +35 °C | - |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | -20 to +35 °C | 1% |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | -20 to +35 °C | 1% |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | -20 to +35 °C | 1% |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | -20 to +35 °C | - |
| 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | -20 to +35 °C | - |
| 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | -20 to +35 °C | 1% |
| 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | -20 to +35 °C | 1% |
| 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | -20 to +35 °C | 1% |
| 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | -20 to +35 °C | 1% |
| 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | -20 to +35 °C | - |
| 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | -20 to +35 °C | - |
| 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | -20 to +35 °C | - |
| 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | -20 to +35 °C | Not applicable |
| 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | -20 to +35 °C | Not applicable |
| 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | -20 to +35 °C | Not applicable |
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | -20 to +35 °C | Not applicable |
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | -20 to +35 °C | Not applicable |
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | -20 to +35 °C | Not applicable |
| 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | -20 to +35 °C | Not applicable |
| 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | -20 to +35 °C | Not applicable |
| 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | -20 to +35 °C | 1% |
| 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | -20 to +35 °C | 1% |
| 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | -20 to +35 °C | Not applicable |
| 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | -20 to +35 °C | Not applicable |
| 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | -20 to +35 °C | 1% |
| 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | -20 to +35 °C | Not applicable |
| 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | -20 to +35 °C | Not applicable |
| 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | -20 to +35 °C | 1% |
| 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | -20 to +35 °C | 1% |
| 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | -20 to +35 °C | 1% |
| 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | -20 to +35 °C | Not applicable |
| 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | -20 to +35 °C | Not applicable |
| 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | -20 to +35 °C | Not applicable |
| 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | -20 to +35 °C | 1% |
| 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | -20 to +35 °C | Not applicable |
| 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | -20 to +35 °C | 1% |
| 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | -20 to +35 °C | Not applicable |
| 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | -20 to +35 °C | 1% |
| 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | -20 to +35 °C | 1% |
| 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | -20 to +35 °C | Not applicable |
| 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | -20 to +35 °C | 1% |
| 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | -20 to +35 °C | Not applicable |
| 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | -20 to +35 °C | 1% |

| Order Code | Full Product Name | Ambient temperature range | Maximum dim level |
|------------|--|---------------------------|-------------------|
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | -20 to +35 °C | Not applicable |
| 38117500 | LL120X LED160S/840 2x PSU VWB 5 WH | -20 to +35 °C | Not applicable |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | -20 to +35 °C | 1% |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | -20 to +35 °C | 1% |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | -20 to +35 °C | 1% |
| 38122900 | LL121X LED80S/840 1x PSU VWB 5 WH | -20 to +35 °C | Not applicable |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | -20 to +35 °C | Not applicable |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | -20 to +35 °C | 1% |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | -20 to +35 °C | Not applicable |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | -20 to +35 °C | 1% |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | -20 to +35 °C | Not applicable |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | -20 to +35 °C | Not applicable |
| 38131100 | LL122X LED80S/840 1x PSU VWB 5 WH | -20 to +35 °C | Not applicable |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | -20 to +35 °C | Not applicable |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | -20 to +35 °C | 1% |
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | -20 to +35 °C | 1% |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | -20 to +35 °C | 1% |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | -20 to +35 °C | 1% |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | -20 to +35 °C | 1% |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | -20 to +35 °C | Not applicable |
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | -20 to +35 °C | Not applicable |
| 38141000 | LL120X LED160S/865 2x PSD VWB 7 VLC WH | -20 to +35 °C | 1% |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | -20 to +35 °C | 1% |
| 38144100 | LL121X LED80S/840 1x PSD VWB 7 WH | -20 to +35 °C | 1% |
| 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | -20 to +35 °C | Not applicable |
| 38146500 | LL122X LED80S/840 1x PSD VWB 7 WH | -20 to +35 °C | 1% |
| 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | -20 to +35 °C | Not applicable |
| 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | -20 to +35 °C | 1% |
| 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | -20 to +35 °C | Not applicable |
| 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | -20 to +35 °C | 1% |
| 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | -20 to +35 °C | Not applicable |
| 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | -20 to +35 °C | Not applicable |
| 38154000 | LL121X LED76S/830 1x PSU VWB 5 WH | -20 to +35 °C | Not applicable |
| 38155700 | LL121X LED80S/840 1x PSD A 7 WH | -20 to +35 °C | 1% |
| 38156400 | LL122X LED76S/830 1x PSU VWB 7 WH | -20 to +35 °C | Not applicable |
| 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | -20 to +35 °C | Not applicable |
| 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | -20 to +35 °C | 1% |
| 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | -20 to +35 °C | 1% |
| 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | -20 to +35 °C | 1% |
| 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | -20 to +35 °C | Not applicable |
| 38162500 | LL121X LED76S/830 1x PSU VWB 7 EL3 WH | -20 to +35 °C | Not applicable |
| 38163200 | LL121X LED76S/830 1x PSU A 5 WH | -20 to +35 °C | Not applicable |
| 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | -20 to +35 °C | Not applicable |
| 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | -20 to +35 °C | 1% |
| 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | -20 to +35 °C | Not applicable |
| 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | -20 to +35 °C | Not applicable |
| 38169400 | LL121X LED76S/830 1x PSU VWB 7 WH | -20 to +35 °C | Not applicable |
| 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | -20 to +35 °C | Not applicable |
| 38173100 | LL121X LED76S/830 1x PSD A 7 WH | -20 to +35 °C | 1% |
| 38175500 | LL120X LED160S/840 2x PSU VWB 7 WH | -20 to +35 °C | Not applicable |
| 38176200 | LL121X LED80S/840 1x PSU VWB 7 WH | -20 to +35 °C | Not applicable |

| Order Code | Full Product Name | Ambient temperature range | Maximum dim level |
|------------|---|---------------------------|-------------------|
| 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | -20 to +35 °C | 1% |
| 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | -20 to +35 °C | Not applicable |
| 38179300 | LL120X LED160S/840 2x PSU VWB 5X2.5 WH | -20 to +35 °C | Not applicable |
| 38180900 | LL122X LED80S/840 1x PSU VWB 5X2.5 WH | -20 to +35 °C | Not applicable |
| 38181600 | LL121X LED80S/840 1x PSU VWB 5X2.5 WH | -20 to +35 °C | Not applicable |
| 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | -20 to +35 °C | Not applicable |
| 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | -20 to +35 °C | 1% |
| 38184700 | LL120X LED160S/840 2x PSD VWB 7X2.5 VLC | -20 to +35 °C | 1% |
| 38185400 | LL122X LED80S/840 1x PSD VWB 7X2.5 WH | -20 to +35 °C | 1% |
| 38186100 | LL121X LED80S/840 1x PSD VWB 7X2.5 WH | -20 to +35 °C | 1% |
| 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | -20 to +35 °C | 1% |
| 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | -20 to +35 °C | Not applicable |
| 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | -20 to +35 °C | 1% |
| 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | -20 to +35 °C | Not applicable |
| 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | -20 to +35 °C | 1% |
| 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | -20 to +35 °C | 1% |
| 38100700 | LL120X LED150S/840 2x PSU O 5 WH | -20 to +35 °C | Not applicable |
| 38102100 | LL121X LED75S/840 1x PSD O 7 WH | -20 to +35 °C | 1% |
| 38090100 | LL120X LED150S/840 1x PSD O 7 WH | -20 to +35 °C | 1% |
| 38142700 | LL120X LED150S/865 2x PSU O 5 WH | -20 to +35 °C | Not applicable |
| 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | +20 to +35 °C | Not applicable |
| 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | +20 to +35 °C | Not applicable |

Controls and Dimming

| Order Code | Full Product Name | Dimmable | Order Code | Full Product Name | Dimmable |
|------------|---|----------|------------|--|----------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | No | 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | No |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | No | 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | No |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | No | 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | Yes |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | No | 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | Yes |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | No | 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | No |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | No | 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | No |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | No | 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | Yes |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | Yes | 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | No |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | Yes | 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | No |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | Yes | 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | Yes |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | No | 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | Yes |
| 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | No | 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | Yes |
| 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | Yes | 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | No |
| 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | Yes | 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | No |
| 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | Yes | 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | No |
| 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | Yes | 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | Yes |
| 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | No | 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | No |
| 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | No | 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | Yes |
| 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | No | 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | No |
| 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | No | 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | Yes |
| 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | No | 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | Yes |
| 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | No | 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | No |
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | No | 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | Yes |
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | No | 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | No |
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | No | 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | Yes |

CoreLine Trunking

| Order Code | Full Product Name | Dimmable | Order Code | Full Product Name | Dimmable |
|------------|--|----------|------------|---|----------|
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | No | 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | Yes |
| 38117500 | LL120X LED160S/840 2x PSU VWB 5 WH | No | 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | Yes |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | Yes | 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | No |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | Yes | 38162500 | LL121X LED76S/830 1x PSU VWB 7 EL3 WH | No |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | Yes | 38163200 | LL121X LED76S/830 1x PSU A 5 WH | No |
| 38122900 | LL121X LED80S/840 1x PSU VWB 5 WH | No | 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | No |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | No | 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | Yes |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | Yes | 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | No |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | No | 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | No |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | Yes | 38169400 | LL121X LED76S/830 1x PSU VWB 7 WH | No |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | No | 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | No |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | No | 38173100 | LL121X LED76S/830 1x PSD A 7 WH | Yes |
| 38131100 | LL122X LED80S/840 1x PSU VWB 5 WH | No | 38175500 | LL120X LED160S/840 2x PSU VWB 7 WH | No |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | No | 38176200 | LL121X LED80S/840 1x PSU VWB 7 WH | No |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | Yes | 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | Yes |
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | Yes | 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | No |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | Yes | 38179300 | LL120X LED160S/840 2x PSU VWB 5X2.5 WH | No |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | Yes | 38180900 | LL122X LED80S/840 1x PSU VWB 5X2.5 WH | No |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | Yes | 38181600 | LL121X LED80S/840 1x PSU VWB 5X2.5 WH | No |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | No | 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | No |
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | No | 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | Yes |
| 38141000 | LL120X LED160S/865 2x PSD VWB 7 VLC WH | Yes | 38184700 | LL120X LED160S/840 2x PSD VWB 7X2.5 VLC | Yes |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | Yes | 38185400 | LL122X LED80S/840 1x PSD VWB 7X2.5 WH | Yes |
| 38144100 | LL121X LED80S/840 1x PSD VWB 7 WH | Yes | 38186100 | LL121X LED80S/840 1x PSD VWB 7X2.5 WH | Yes |
| 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | No | 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | Yes |
| 38146500 | LL122X LED80S/840 1x PSD VWB 7 WH | Yes | 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | No |
| 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | No | 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | Yes |
| 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | Yes | 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | No |
| 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | No | 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | Yes |
| 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | Yes | 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | Yes |
| 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | No | 38100700 | LL120X LED150S/840 2x PSU O 5 WH | No |
| 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | No | 38102100 | LL121X LED75S/840 1x PSD O 7 WH | Yes |
| 38154000 | LL121X LED76S/830 1x PSU VWB 5 WH | No | 38090100 | LL120X LED150S/840 1x PSD O 7 WH | Yes |
| 38155700 | LL121X LED80S/840 1x PSD A 7 WH | Yes | 38142700 | LL120X LED150S/865 2x PSU O 5 WH | No |
| 38156400 | LL122X LED76S/830 1x PSU VWB 7 WH | No | 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | No |
| 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | No | 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | No |
| 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | Yes | | | |

Operating and Electrical

| Order Code | Full Product Name | Circuit | Order Code | Full Product Name | Circuit |
|------------|--|---------|------------|---|---------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | No | 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | No |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | No | 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | No |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | No | 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | No |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | No | 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | No |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | No | 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | No |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | No | 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | No |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | No | 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | No |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | No | 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | No |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | No | 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | No |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | No | 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | No |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | No | 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | No |

CoreLine Trunking

| Order Code | Full Product Name | Circuit | Order Code | Full Product Name | Circuit |
|------------|--|---------|------------|---|---------|
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | No | 38144100 | LL121X LED80S/840 1x PSD VWB 7 WH | No |
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | No | 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | No |
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | No | 38146500 | LL122X LED80S/840 1x PSD VWB 7 WH | No |
| 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | No | 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | No |
| 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | No | 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | No |
| 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | No | 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | No |
| 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | No | 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | No |
| 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | No | 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | No |
| 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | No | 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | No |
| 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | No | 38154000 | LL121X LED76S/830 1x PSU VWB 5 WH | No |
| 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | No | 38155700 | LL121X LED80S/840 1x PSD A 7 WH | No |
| 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | No | 38156400 | LL122X LED76S/830 1x PSU VWB 7 WH | No |
| 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | No | 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | No |
| 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | No | 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | No |
| 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | No | 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | No |
| 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | No | 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | No |
| 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | No | 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | No |
| 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | No | 38162500 | LL121X LED76S/830 1x PSU VWB 7 EL3 WH | No |
| 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | No | 38163200 | LL121X LED76S/830 1x PSU A 5 WH | No |
| 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | No | 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | No |
| 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | No | 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | No |
| 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | No | 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | No |
| 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | No | 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | No |
| 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | No | 38169400 | LL121X LED76S/830 1x PSU VWB 7 WH | No |
| 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | No | 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | No |
| 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | No | 38173100 | LL121X LED76S/830 1x PSD A 7 WH | No |
| 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | No | 38175500 | LL120X LED160S/840 2x PSU VWB 7 WH | No |
| 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | No | 38176200 | LL121X LED80S/840 1x PSU VWB 7 WH | No |
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | No | 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | No |
| 38117500 | LL120X LED160S/840 2x PSU VWB 5 WH | No | 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | No |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | No | 38179300 | LL120X LED160S/840 2x PSU VWB 5X2.5 WH | No |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | No | 38180900 | LL122X LED80S/840 1x PSU VWB 5X2.5 WH | No |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | No | 38181600 | LL121X LED80S/840 1x PSU VWB 5X2.5 WH | No |
| 38122900 | LL121X LED80S/840 1x PSU VWB 5 WH | No | 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | No |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | No | 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | No |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | No | 38184700 | LL120X LED160S/840 2x PSD VWB 7X2.5 VLC | No |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | No | 38185400 | LL122X LED80S/840 1x PSD VWB 7X2.5 WH | No |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | No | 38186100 | LL121X LED80S/840 1x PSD VWB 7X2.5 WH | No |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | No | 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | No |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | No | 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | No |
| 38131100 | LL122X LED80S/840 1x PSU VWB 5 WH | No | 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | No |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | No | 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | No |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | No | 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | No |
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | No | 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | No |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | No | 38100700 | LL120X LED150S/840 2x PSU O 5 WH | No |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | No | 38102100 | LL121X LED75S/840 1x PSD O 7 WH | No |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | No | 38090100 | LL120X LED150S/840 1x PSD O 7 WH | No |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | No | 38142700 | LL120X LED150S/865 2x PSU O 5 WH | No |
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | No | 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | - |
| 38141000 | LL120X LED160S/865 2x PSD VWB 7 VLC WH | No | 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | - |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | No | | | |

General Information (1/2)

CoreLine Trunking

| Order Code | Full Product Name | Accessories included | Optical cover/ lens type | Emergency lighting | Glow-wire test |
|------------|---|----------------------|--------------------------|--------------------|----------------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | MB-SW | No | No | 650/5 |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | MB-SW | No | No | 650/5 |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | MB-SW | No | No | 650/5 |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | MB-SW | No | No | 650/5 |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | MB-SW | No | No | 650/5 |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | MB-SW | No | No | 650/5 |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | MB-SW | No | No | 650/5 |
| 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | MB-SW | No | No | 650/5 |
| 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | MB-SW | No | No | 650/5 |
| 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | MB-SW | No | No | 650/5 |
| 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | MB-SW | No | No | 650/5 |
| 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | MB-SW | No | No | 650/5 |
| 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | MB-SW | No | No | 650/5 |
| 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | MB-SW | No | No | 650/5 |
| 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | MB-SW | No | No | 650/5 |
| 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | MB-SW | No | No | 650/5 |
| 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | MB-SW | No | No | 650/5 |
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | MB-SW | No | No | 650/5 |
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | MB-SW | No | No | 650/5 |

| Order Code | Full Product Name | Accessories included | Optical cover/ lens type | Emergency lighting | Glow-wire test |
|------------|--|----------------------|--------------------------|--------------------|----------------|
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | MB-SW | No | No | 650/5 |
| 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | MB-SW | No | No | 650/5 |
| 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | MB-SW | No | No | 650/5 |
| 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | MB-SW | No | No | 650/5 |
| 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | MB-SW | No | No | 650/5 |
| 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | MB-SW | No | No | 650/5 |
| 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | MB-SW | No | No | 650/5 |
| 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | MB-SW | No | No | 650/5 |
| 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | MB-SW | No | No | 650/5 |
| 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | MB-SW | No | No | 650/5 |
| 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | MB-SW | No | No | 650/5 |
| 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | MB-SW | No | No | 650/5 |
| 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | MB-SW | No | No | 650/5 |
| 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | MB-SW | No | No | 650/5 |
| 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | MB-SW | No | No | 650/5 |
| 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | MB-SW | No | No | 650/5 |

CoreLine Trunking

| Order Code | Full Product Name | Accessories included | Optical cover/ lens type | Emergency lighting | Glow-wire test |
|------------|---|----------------------|--------------------------|--------------------|----------------|
| 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | MB-SW | No | No | 650/5 |
| 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | MB-SW | No | No | 650/5 |
| 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | MB-SW | No | No | 650/5 |
| 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | MB-SW | No | No | 650/5 |
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 38117500 | LL120X LED160S/840 2x PSU VWB 5 WH | MB-SW | No | No | 650/5 |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | MB-SW | No | No | 650/5 |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | MB-SW | No | No | 650/5 |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | MB-SW | No | No | 650/5 |
| 38122900 | LL121X LED80S/840 1x PSU VWB 5 WH | MB-SW | No | No | 650/5 |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | MB-SW | No | EL3 | 850/5 |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | MB-SW | No | No | 650/5 |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | MB-SW | No | No | 650/5 |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | MB-SW | No | No | 650/5 |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | MB-SW | No | No | 650/5 |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 38131100 | LL122X LED80S/840 1x PSU VWB 5 WH | MB-SW | No | No | 650/5 |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | MB-SW | No | EL3 | 850/5 |
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | MB-SW | No | No | 650/5 |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | MB-SW | No | No | 650/5 |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | MB-SW | No | No | 650/5 |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | MB-SW | No | No | 650/5 |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | MB-SW | No | No | 650/5 |

| Order Code | Full Product Name | Accessories included | Optical cover/ lens type | Emergency lighting | Glow-wire test |
|------------|--|----------------------|--------------------------|--------------------|----------------|
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | MB-SW | No | No | 650/5 |
| 38141000 | LL120X LED160S/865 2x PSD VWB 7 VLC WH | MB-SW | No | No | 650/5 |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | MB-SW | No | No | 650/5 |
| 38144100 | LL121X LED80S/840 1x PSD VWB 7 WH | MB-SW | No | No | 650/5 |
| 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | MB-SW | No | No | 650/5 |
| 38146500 | LL122X LED80S/840 1x PSD VWB 7 WH | MB-SW | No | No | 650/5 |
| 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | MB-SW | No | No | 650/5 |
| 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | MB-SW | No | No | 650/5 |
| 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | MB-SW | No | No | 650/5 |
| 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | MB-SW | No | No | 650/5 |
| 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | MB-SW | No | No | 650/5 |
| 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | MB-SW | No | No | 650/5 |
| 38154000 | LL121X LED76S/830 1x PSU VWB 5 WH | MB-SW | No | No | 650/5 |
| 38155700 | LL121X LED80S/840 1x PSD A 7 WH | MB-SW | No | No | 650/5 |
| 38156400 | LL122X LED76S/830 1x PSU VWB 7 WH | MB-SW | No | No | 650/5 |
| 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | MB-SW | No | No | 650/5 |
| 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | MB-SW | No | No | 650/5 |
| 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | MB-SW | No | No | 650/5 |
| 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | MB-SW | No | No | 650/5 |
| 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | MB-SW | No | No | 650/5 |
| 38162500 | LL121X LED76S/830 1x PSU VWB 7 EL3 WH | MB-SW | No | EL3 | 850/5 |
| 38163200 | LL121X LED76S/830 1x PSU A 5 WH | MB-SW | No | No | 650/5 |
| 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | MB-SW | No | EL3 | 850/5 |
| 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | MB-SW | No | No | 650/5 |

CoreLine Trunking

| Order Code | Full Product Name | Accessories included | Optical cover/ lens type | Emergency lighting | Glow-wire test |
|------------|---|----------------------|--------------------------|--------------------|----------------|
| 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | MB-SW | No | EL3 | 850/5 |
| 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | MB-SW | No | No | 650/5 |
| 38169400 | LL121X LED76S/830 1x PSU VWB 7 WH | MB-SW | No | No | 650/5 |
| 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | MB-SW | No | No | 650/5 |
| 38173100 | LL121X LED76S/830 1x PSD A 7 WH | MB-SW | No | No | 650/5 |
| 38175500 | LL120X LED160S/840 2x PSU VWB 7 WH | MB-SW | No | No | 650/5 |
| 38176200 | LL121X LED80S/840 1x PSU VWB 7 WH | MB-SW | No | No | 650/5 |
| 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | MB-SW | No | No | 650/5 |
| 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | MB-SW | No | No | 650/5 |
| 38179300 | LL120X LED160S/840 2x PSU VWB 5X2.5 WH | MB-SW | No | No | 650/5 |
| 38180900 | LL122X LED80S/840 1x PSU VWB 5X2.5 WH | MB-SW | No | No | 650/5 |
| 38181600 | LL121X LED80S/840 1x PSU VWB 5X2.5 WH | MB-SW | No | No | 650/5 |
| 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | MB-SW | No | No | 650/5 |
| 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | MB-SW | No | No | 650/5 |
| 38184700 | LL120X LED160S/840 2x PSD VWB 7X2.5 VLC | MB-SW | No | No | 650/5 |

| Order Code | Full Product Name | Accessories included | Optical cover/ lens type | Emergency lighting | Glow-wire test |
|------------|---------------------------------------|----------------------|--------------------------|--------------------|----------------|
| 38185400 | LL122X LED80S/840 1x PSD VWB 7X2.5 WH | MB-SW | No | No | 650/5 |
| 38186100 | LL121X LED80S/840 1x PSD VWB 7X2.5 WH | MB-SW | No | No | 650/5 |
| 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | MB-SW | No | No | 650/5 |
| 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | MB-SW | No | EL3 | 850/5 |
| 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | MB-SW | No | No | 650/5 |
| 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | MB-SW | No | No | 650/5 |
| 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | MB-SW | No | EL3 | 850/5 |
| 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | MB-SW | O | No | 650/5 |
| 38100700 | LL120X LED150S/840 2x PSU O 5 WH | MB-SW | O | No | 650/5 |
| 38102100 | LL121X LED75S/840 1x PSD O 7 WH | MB-SW | O | No | 650/5 |
| 38090100 | LL120X LED150S/840 1x PSD O 7 WH | MB-SW | O | No | 650/5 |
| 38142700 | LL120X LED150S/865 2x PSU O 5 WH | MB-SW | O | No | 650/5 |
| 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | - | - | - | 650/5 |
| 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | - | - | - | 650/5 |

General Information (2/2)

| Order Code | Full Product Name | Lamp family code | Mechanical accessories | Number of gear units | Number of light sources | Optic type | Product Family Code | Internal wiring |
|------------|--|------------------|------------------------|----------------------|-------------------------|------------|---------------------|-----------------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | LED90S | No | 2 units | 6 | NB | LL120X | Standard |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | LED45S | No | 1 unit | 3 | MB | LL121X | Standard |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | LED90S | No | 2 units | 6 | MB | LL120X | Standard |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | LED45S | No | 1 unit | 3 | WB | LL121X | Standard |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | LED90S | No | 2 units | 6 | WB | LL120X | Standard |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | LED45S | No | 1 unit | 3 | DA20 | LL121X | Standard |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | LED90S | No | 2 units | 6 | DA20 | LL120X | Standard |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | LED90S | No | 2 units | 6 | NB | LL120X | Standard |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | LED45S | No | 1 unit | 3 | DA20 | LL121X | Standard |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | LED90S | No | 2 units | 6 | DA20 | LL120X | Standard |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | LED45S | No | 1 unit | 3 | NB | LL121X | Standard |
| 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | LED90S | No | 2 units | 6 | VWB | LL120X | Standard |
| 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | LED90S | No | 2 units | 6 | WB | LL120X | Standard |
| 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | LED90S | No | 2 units | 6 | WB | LL120X | Standard |

CoreLine Trunking

| Order Code | Full Product Name | Lamp family code | Mechanical accessories | Number of gear units | Number of light sources | Optic type | Product Family Code | Internal wiring |
|------------|--|------------------|------------------------|----------------------|-------------------------|------------|---------------------|-----------------|
| 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | LED45S | No | 1 unit | 3 | WB | LL121X | Standard |
| 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | LED90S | No | 1 unit | 6 | WB | LL120X | Standard |
| 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | LED90S | No | 1 unit | 6 | MB | LL120X | Standard |
| 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | LED90S | No | 1 unit | 6 | MB | LL120X | Standard |
| 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | LED90S | No | 1 unit | 6 | WB | LL120X | Standard |
| 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | LED160S | No | 2 units | 6 | WB | LL120X | Standard |
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | LED160S | No | 2 units | 6 | NB | LL120X | Standard |
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | LED160S | No | 2 units | 6 | WB | LL120X | Standard |
| 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | LED160S | No | 2 units | 6 | NB | LL120X | Standard |
| 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | LED160S | No | 2 units | 6 | WB | LL120X | Standard |
| 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | LED160S | No | 2 units | 6 | WB | LL120X | Standard |
| 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | LED160S | No | 2 units | 6 | WB | LL120X | Standard |
| 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | LED160S | No | 2 units | 6 | MB | LL120X | Standard |
| 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | LED160S | No | 2 units | 6 | DA20 | LL120X | Standard |
| 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | LED160S | No | 1 unit | 6 | WB | LL120X | Standard |
| 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | LED160S | No | 1 unit | 6 | WB | LL120X | Standard |
| 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | LED160S | No | 2 units | 6 | MB | LL120X | Standard |
| 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | LED76S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | LED80S | No | 1 unit | 3 | MB | LL121X | Standard |
| 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | LED152S | No | 2 units | 6 | WB | LL120X | Standard |
| 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | LED160S | No | 2 units | 6 | VWB | LL120X | Standard |
| 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | LED152S | No | 2 units | 6 | VWB | LL120X | Standard |
| 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | LED160S | No | 1 unit | 6 | NB | LL120X | Standard |
| 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | LED152S | No | 2 units | 6 | DA20 | LL120X | Standard |
| 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | LED160S | No | 2 units | 6 | NB | LL120X | Standard |
| 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | LED160S | No | 2 units | 6 | WB | LL120X | Standard |
| 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | LED160S | No | 2 units | 6 | NB | LL120X | Standard |
| 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | LED80S | No | 1 unit | 3 | DA20 | LL121X | Standard |
| 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | LED152S | No | 2 units | 6 | WB | LL120X | Standard |
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | LED152S | No | 2 units | 6 | MB | LL120X | Standard |
| 38117500 | LL120X LED160S/840 2x PSU VWB 5 WH | LED160S | No | 2 units | 6 | VWB | LL120X | Standard |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | LED76S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | LED160S | No | 2 units | 6 | A | LL120X | Standard |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38122900 | LL121X LED80S/840 1x PSU VWB 5 WH | LED80S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | LED80S | No | 1 unit | 3 | MB | LL121X | Standard |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | LED160S | No | 2 units | 6 | A | LL120X | Standard |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | LED80S | No | 1 unit | 3 | WB | LL122X | Standard |
| 38131100 | LL122X LED80S/840 1x PSU VWB 5 WH | LED80S | No | 1 unit | 3 | VWB | LL122X | Standard |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | LED76S | No | 1 unit | 3 | MB | LL121X | Standard |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |

CoreLine Trunking

| Order Code | Full Product Name | Lamp family code | Mechanical accessories | Number of gear units | Number of light sources | Optic type | Product Family Code | Internal wiring |
|------------|---|------------------|------------------------|----------------------|-------------------------|------------|---------------------|-----------------|
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | LED160S | No | 2 units | 6 | MB | LL120X | Standard |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | LED160S | No | 2 units | 6 | DA20 | LL120X | Standard |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | LED80S | No | 1 unit | 3 | DA20 | LL121X | Standard |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | LED160S | No | 2 units | 6 | A | LL120X | Standard |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | LED80S | No | 1 unit | 3 | A | LL121X | Standard |
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | LED152S | No | 2 units | 6 | A | LL120X | Standard |
| 38141000 | LL120X LED160S/865 2x PSD VWB 7 VLC WH | LED160S | No | 2 units | 6 | VWB | LL120X | Standard |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | LED80S | No | 1 unit | 3 | MB | LL121X | Standard |
| 38144100 | LL121X LED80S/840 1x PSD VWB 7 WH | LED80S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | LED80S | No | 1 unit | 3 | MB | LL121X | Standard |
| 38146500 | LL122X LED80S/840 1x PSD VWB 7 WH | LED80S | No | 1 unit | 3 | VWB | LL122X | Standard |
| 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | LED160S | No | 2 units | 6 | WB | LL120X | Standard |
| 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | LED80S | No | 1 unit | 3 | WB | LL122X | Standard |
| 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | LED152S | No | 2 units | 6 | DA20 | LL120X | Standard |
| 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | LED76S | No | 1 unit | 3 | DA20 | LL121X | Standard |
| 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38154000 | LL121X LED76S/830 1x PSU VWB 5 WH | LED76S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38155700 | LL121X LED80S/840 1x PSD A 7 WH | LED80S | No | 1 unit | 3 | A | LL121X | Standard |
| 38156400 | LL122X LED76S/830 1x PSU VWB 7 WH | LED76S | No | 1 unit | 3 | VWB | LL122X | Standard |
| 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | LED160S | No | 2 units | 6 | MB | LL120X | Standard |
| 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | LED76S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | LED80S | No | 1 unit | 3 | WB | LL121X | Standard |
| 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | LED160S | No | 2 units | 6 | MB | LL120X | Standard |
| 38162500 | LL121X LED76S/830 1x PSU VWB 7 EL3 WH | LED76S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38163200 | LL121X LED76S/830 1x PSU A 5 WH | LED76S | No | 1 unit | 3 | A | LL121X | Standard |
| 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | LED80S | No | 1 unit | 3 | DA20 | LL121X | Standard |
| 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | LED80S | No | 1 unit | 3 | A | LL121X | Standard |
| 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | LED160S | No | 2 units | 6 | NB | LL120X | Standard |
| 38169400 | LL121X LED76S/830 1x PSU VWB 7 WH | LED76S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |
| 38173100 | LL121X LED76S/830 1x PSD A 7 WH | LED76S | No | 1 unit | 3 | A | LL121X | Standard |
| 38175500 | LL120X LED160S/840 2x PSU VWB 7 WH | LED160S | No | 2 units | 6 | VWB | LL120X | Standard |
| 38176200 | LL121X LED80S/840 1x PSU VWB 7 WH | LED80S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | LED80S | No | 1 unit | 3 | MB | LL121X | Standard |
| 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | LED80S | No | 1 unit | 3 | WB | LL122X | Standard |
| 38179300 | LL120X LED160S/840 2x PSU VWB 5X2.5 WH | LED160S | No | 2 units | 6 | VWB | LL120X | Standard |
| 38180900 | LL122X LED80S/840 1x PSU VWB 5X2.5 WH | LED80S | No | 1 unit | 3 | VWB | LL122X | Standard |
| 38181600 | LL121X LED80S/840 1x PSU VWB 5X2.5 WH | LED80S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | LED80S | No | 1 unit | 3 | NB | LL122X | Standard |
| 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | LED80S | No | 1 unit | 3 | WB | LL122X | Standard |
| 38184700 | LL120X LED160S/840 2x PSD VWB 7X2.5 VLC | LED160S | No | 2 units | 6 | VWB | LL120X | Standard |
| 38185400 | LL122X LED80S/840 1x PSD VWB 7X2.5 WH | LED80S | No | 1 unit | 3 | VWB | LL122X | Standard |
| 38186100 | LL121X LED80S/840 1x PSD VWB 7X2.5 WH | LED80S | No | 1 unit | 3 | VWB | LL121X | Standard |
| 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | LED80S | No | 1 unit | 3 | NB | LL122X | Standard |
| 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | LED80S | No | 1 unit | 3 | MB | LL121X | Standard |
| 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | LED160S | No | 1 unit | 6 | MB | LL120X | Standard |
| 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | LED160S | No | 2 units | 6 | MB | LL120X | Standard |
| 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | LED80S | No | 1 unit | 3 | NB | LL121X | Standard |

CoreLine Trunking

| Order Code | Full Product Name | Lamp family code | Mechanical accessories | Number of gear units | Number of light sources | Optic type | Product Family Code | Internal wiring |
|------------|--------------------------------------|------------------|------------------------|----------------------|-------------------------|------------|---------------------|-----------------|
| 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | LED150S | No | 2 units | 6 | No | LL120X | Standard |
| 38100700 | LL120X LED150S/840 2x PSU O 5 WH | LED150S | No | 2 units | 6 | No | LL120X | Standard |
| 38102100 | LL121X LED75S/840 1x PSD O 7 WH | LED75S | No | 1 unit | 3 | No | LL121X | Standard |
| 38090100 | LL120X LED150S/840 1x PSD O 7 WH | LED150S | No | 1 unit | 6 | No | LL120X | Standard |
| 38142700 | LL120X LED150S/865 2x PSU O 5 WH | LED150S | No | 2 units | 6 | No | LL120X | Standard |
| 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | - | - | 2 units | - | No | LL120X | - |
| 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | - | - | 1 unit | - | No | LL121X | - |

Initial Performance (IEC Compliant) (1/2)

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|--|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | 4000 K | 141 lm/W | 4500 lm | +/-7% |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | 4000 K | 141 lm/W | 4500 lm | +/-7% |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | 4000 K | 141 lm/W | 4500 lm | +/-7% |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | 4000 K | 141 lm/W | 4500 lm | +/-7% |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | 4000 K | 141 lm/W | 4500 lm | +/-7% |
| 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|---|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | 4000 K | 141 lm/W | 4500 lm | +/-7% |
| 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | 4000 K | 141 lm/W | 9000 lm | +/-7% |
| 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | 4000 K | 148 lm/W | 16000 lm | +/-2% |

CoreLine Trunking

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|---|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|---|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | 3000 K | 141 lm/W | 15200 lm | +/-2% |
| 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | 3000 K | 141 lm/W | 15200 lm | +/-2% |
| 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | 3000 K | 141 lm/W | 15200 lm | +/-2% |
| 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | 3000 K | 141 lm/W | 15200 lm | +/-2% |
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | 3000 K | 141 lm/W | 15200 lm | +/-2% |
| 38117500 | LL120X LED160S/840 2x PSU VWB 5 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |

CoreLine Trunking

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|--|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38122900 | LL121X LED80S/840 1x PSU VWB 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | 4000 K | 143 lm/W | 8000 lm | +/-1% |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38131100 | LL122X LED80S/840 1x PSU VWB 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | 4000 K | 143 lm/W | 8000 lm | +/-1% |
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | 3000 K | 141 lm/W | 15200 lm | +/-2% |

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|--|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38141000 | LL120X LED160S/865 2x PSD VWB 7 VLC WH | 6500 K | 148 lm/W | 16000 lm | +/-2% |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38144100 | LL121X LED80S/840 1x PSD VWB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38146500 | LL122X LED80S/840 1x PSD VWB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | 6500 K | 148 lm/W | 16000 lm | +/-2% |
| 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | 3000 K | 141 lm/W | 15200 lm | +/-2% |
| 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38154000 | LL121X LED76S/830 1x PSU VWB 5 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38155700 | LL121X LED80S/840 1x PSD A 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38156400 | LL122X LED76S/830 1x PSU VWB 7 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | 6500 K | 148 lm/W | 16000 lm | +/-2% |

CoreLine Trunking

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|--|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | 6500 K | 148 lm/W | 8000 lm | +/-1% |
| 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38162500 | LL121X LED76S/830 1x PSU VWB 7 EL3 WH | 3000 K | 136 lm/W | 7600 lm | +/-1% |
| 38163200 | LL121X LED76S/830 1x PSU A 5 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | 4000 K | 143 lm/W | 8000 lm | +/-1% |
| 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | 4000 K | 143 lm/W | 8000 lm | +/-1% |
| 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38169400 | LL121X LED76S/830 1x PSU VWB 7 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38173100 | LL121X LED76S/830 1x PSD A 7 WH | 3000 K | 141 lm/W | 7600 lm | +/-1% |
| 38175500 | LL120X LED160S/840 2x PSU VWB 7 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38176200 | LL121X LED80S/840 1x PSU VWB 7 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | 6500 K | 148 lm/W | 8000 lm | +/-1% |
| 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|---|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38179300 | LL120X LED160S/840 2x PSU VWB 5X2.5 WH | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38180900 | LL122X LED80S/840 1x PSU VWB 5X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38181600 | LL121X LED80S/840 1x PSU VWB 5X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38184700 | LL120X LED160S/840 2x PSD VWB 7X2.5 VLC | 4000 K | 148 lm/W | 16000 lm | +/-2% |
| 38185400 | LL122X LED80S/840 1x PSD VWB 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38186100 | LL121X LED80S/840 1x PSD VWB 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | 4000 K | 148 lm/W | 8000 lm | +/-1% |
| 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | 4000 K | 143 lm/W | 8000 lm | +/-1% |
| 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | 6500 K | 148 lm/W | 16000 lm | +/-2% |
| 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | 6500 K | 148 lm/W | 16000 lm | +/-2% |
| 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | 4000 K | 143 lm/W | 8000 lm | +/-1% |
| 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | 4000 K | 139 lm/W | 15000 lm | +/-2% |

CoreLine Trunking

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|--|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38100700 | LL120X LED150S/840 2x PSU O 5 WH | 4000 K | 139 lm/W | 15000 lm | +/-2% |
| 38102100 | LL121X LED75S/840 1x PSD O 7 WH | 4000 K | 139 lm/W | 7500 lm | +/-1% |
| 38090100 | LL120X LED150S/840 1x PSD O 7 WH | 4000 K | 139 lm/W | 15000 lm | +/-2% |

| Order Code | Full Product Name | Init. Corr. Color Temperature | Initial LED luminaire efficacy | Initial luminous flux | Luminous flux tolerance |
|------------|--|-------------------------------|--------------------------------|-----------------------|-------------------------|
| 38142700 | LL120X LED150S/865 2x PSU O 5 WH | 6500 K | 139 lm/W | 15000 lm | +/-2% |
| 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | 4000 K | 120 lm/W | 15000 lm | +/-2% |
| 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | 4000 K | 120 lm/W | 7500 lm | +/-2% |

Initial Performance (IEC Compliant) (2/2)

| Order Code | Full Product Name | Initial input power |
|------------|--|---------------------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | 64 W |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | 32 W |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | 64 W |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | 32 W |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | 64 W |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | 32 W |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | 64 W |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | 64 W |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | 32 W |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | 64 W |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | 32 W |
| 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | 64 W |
| 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | 64 W |
| 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | 64 W |
| 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | 32 W |
| 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | 64 W |
| 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | 64 W |
| 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | 64 W |
| 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | 64 W |
| 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | 54 W |
| 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | 54 W |
| 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | 54 W |
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | 108 W |
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | 108 W |
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | 54 W |
| 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | 108 W |
| 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | 108 W |
| 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | 108 W |
| 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | 108 W |
| 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | 108 W |
| 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | 108 W |
| 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | 54 W |
| 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | 108 W |
| 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | 54 W |
| 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | 108 W |
| 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | 108 W |
| 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | 108 W |

| Order Code | Full Product Name | Initial input power |
|------------|--|---------------------|
| 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | 54 W |
| 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | 54 W |
| 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | 108 W |
| 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | 108 W |
| 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | 108 W |
| 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | 108 W |
| 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | 108 W |
| 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | 108 W |
| 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | 54 W |
| 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | 108 W |
| 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | 108 W |
| 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | 54 W |
| 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | 108 W |
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | 108 W |
| 38117500 | LL120X LED160S/840 2x PSU VWB 5 WH | 108 W |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | 54 W |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | 108 W |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | 54 W |
| 38122900 | LL121X LED80S/840 1x PSU VWB 5 WH | 54 W |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | 56 W |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | 54 W |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | 54 W |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | 54 W |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | 108 W |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | 54 W |
| 38131100 | LL122X LED80S/840 1x PSU VWB 5 WH | 54 W |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | 54 W |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | 56 W |
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | 108 W |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | 108 W |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | 54 W |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | 108 W |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | 54 W |
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | 108 W |
| 38141000 | LL120X LED160S/865 2x PSD VWB 7 VLC WH | 108 W |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | 54 W |
| 38144100 | LL121X LED80S/840 1x PSD VWB 7 WH | 54 W |

CoreLine Trunking

| Order Code | Full Product Name | Initial input power |
|------------|---|---------------------|
| 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | 54 W |
| 38146500 | LL122X LED80S/840 1x PSD VWB 7 WH | 54 W |
| 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | 108 W |
| 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | 54 W |
| 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | 54 W |
| 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | 108 W |
| 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | 54 W |
| 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | 54 W |
| 38154000 | LL121X LED76S/830 1x PSU VWB 5 WH | 54 W |
| 38155700 | LL121X LED80S/840 1x PSD A 7 WH | 54 W |
| 38156400 | LL122X LED76S/830 1x PSU VWB 7 WH | 54 W |
| 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | 54 W |
| 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | 108 W |
| 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | 54 W |
| 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | 54 W |
| 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | 108 W |
| 38162500 | LL121X LED76S/830 1x PSU VWB 7 EL3 WH | 56 W |
| 38163200 | LL121X LED76S/830 1x PSU A 5 WH | 54 W |
| 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | 56 W |
| 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | 54 W |
| 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | 56 W |
| 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | 108 W |
| 38169400 | LL121X LED76S/830 1x PSU VWB 7 WH | 54 W |
| 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | 54 W |
| 38173100 | LL121X LED76S/830 1x PSD A 7 WH | 54 W |

| Order Code | Full Product Name | Initial input power |
|------------|---|---------------------|
| 38175500 | LL120X LED160S/840 2x PSU VWB 7 WH | 108 W |
| 38176200 | LL121X LED80S/840 1x PSU VWB 7 WH | 54 W |
| 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | 54 W |
| 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | 54 W |
| 38179300 | LL120X LED160S/840 2x PSU VWB 5X2.5 WH | 108 W |
| 38180900 | LL122X LED80S/840 1x PSU VWB 5X2.5 WH | 54 W |
| 38181600 | LL121X LED80S/840 1x PSU VWB 5X2.5 WH | 54 W |
| 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | 54 W |
| 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | 54 W |
| 38184700 | LL120X LED160S/840 2x PSD VWB 7X2.5 VLC | 108 W |
| 38185400 | LL122X LED80S/840 1x PSD VWB 7X2.5 WH | 54 W |
| 38186100 | LL121X LED80S/840 1x PSD VWB 7X2.5 WH | 54 W |
| 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | 54 W |
| 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | 56 W |
| 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | 108 W |
| 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | 108 W |
| 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | 56 W |
| 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | 108 W |
| 38100700 | LL120X LED150S/840 2x PSU O 5 WH | 108 W |
| 38102100 | LL121X LED75S/840 1x PSD O 7 WH | 54 W |
| 38090100 | LL120X LED150S/840 1x PSD O 7 WH | 108 W |
| 38142700 | LL120X LED150S/865 2x PSU O 5 WH | 108 W |
| 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | 126 W |
| 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | 63 W |

Mechanical and Housing

| Order Code | Full Product Name | Color | Diameter |
|------------|---|-------|----------|
| 88166700 | LL120X LED90S/840 2x PSU NB 5 WH | White | - |
| 88171100 | LL121X LED45S/840 1x PSU MB 5 WH | White | - |
| 88172800 | LL120X LED90S/840 2x PSU MB 5 WH | White | - |
| 88177300 | LL121X LED45S/840 1x PSU WB 5 WH | White | - |
| 88178000 | LL120X LED90S/840 2x PSU WB 5 WH | White | - |
| 88183400 | LL121X LED45S/840 1x PSU DA20 5 WH | White | - |
| 88184100 | LL120X LED90S/840 2x PSU DA20 5 WH | White | - |
| 88190200 | LL120X LED90S/840 2x PSD NB 7 VLC WH | White | - |
| 88203900 | LL121X LED45S/840 1x PSD DA20 7 WH | White | - |
| 88204600 | LL120X LED90S/840 2x PSD DA20 7 VLC WH | White | - |
| 88435400 | LL121X LED45S/840 1x PSU NB 5 WH | White | - |
| 90694000 | LL120X LED90S/840 2x PSU VWB 5 WH | White | - |
| 90746600 | LL120X LED90S/840 2x PSD WB 9 VLC WH | White | - |
| 88141400 | LL120X LED90S/840 2x PSD WB 7 VLC WH | White | - |
| 88140700 | LL121X LED45S/840 1x PSD WB 7 WH | White | - |
| 32344100 | LL120X LED90S/840 1x PSD WB 9 WH | White | - |
| 34736200 | LL120X LED90S/840 1x PSU MB 5 WH | White | - |
| 34743000 | LL120X LED90S/840 1x PSU MB 7 WH | White | - |
| 34745400 | LL120X LED90S/840 1x PSU WB 7 WH | White | - |
| 38078900 | LL121X LED80S/840 PSU WB SMB WH KIT | White | - |
| 38079600 | LL121X LED80S/840 PSU NB SMB WH KIT | White | - |
| 38080200 | LL121X LED80S/840 PSU WB TW3 SMB WH KIT | White | - |
| 38081900 | LL120X LED160S/840 PSU WB SMB WH KIT | White | - |


| Order Code | Full Product Name | Color | Diameter |
|------------|--|-------|----------|
| 38082600 | LL120X LED160S/840 PSU NB SMB WH KIT | White | - |
| 38083300 | LL121X LED80S/840 PSU NB TW3 SMB WH KIT | White | - |
| 38084000 | LL120X LED160S/840 PSU WB TW3 SMB WH KIT | White | - |
| 38085700 | LL120X LED160S/840 PSU NB TW3 SMB WH KIT | White | - |
| 38086400 | LL120X LED160S/840 2x PSD WB 7X2.5 VLC W | White | - |
| 38087100 | LL120X LED160S/840 2x PSD WB 7 VLC WH | White | - |
| 38088800 | LL120X LED160S/840 2x PSU WB 5 WH | White | - |
| 38091800 | LL120X LED160S/840 2x PSU MB 5 WH | White | - |
| 38092500 | LL121X LED80S/840 1x PSD WB 7 WH | White | - |
| 38093200 | LL120X LED160S/840 2x PSU DA20 5 WH | White | - |
| 38094900 | LL121X LED80S/840 1x PSU WB 5 WH | White | - |
| 38095600 | LL120X LED160S/840 1x PSD WB 7 WH | White | - |
| 38097000 | LL120X LED160S/840 1x PSD WB 7X2.5 WH | White | - |
| 38098700 | LL120X LED160S/840 2x PSD MB 7 VLC WH | White | - |
| 38101400 | LL121X LED76S/830 1x PSU WB 5 WH | White | - |
| 38103800 | LL121X LED80S/840 1x PSU MB 5 WH | White | - |
| 38104500 | LL120X LED152S/830 2x PSU WB 5 WH | White | - |
| 38105200 | LL120X LED160S/840 2x PSD VWB 7 VLC WH | White | - |
| 38106900 | LL120X LED152S/830 2x PSU VWB 5 WH | White | - |
| 38107600 | LL120X LED160S/840 1x PSD NB 7 WH | White | - |
| 38109000 | LL120X LED152S/830 2x PSU DA20 5 WH | White | - |
| 38110600 | LL120X LED160S/840 2x PSD NB 9 VLC WH | White | - |
| 38111300 | LL121X LED80S/840 1x PSD WB 7X2.5 WH | White | - |

CoreLine Trunking


| Order Code | Full Product Name | Color | Diameter | Order Code | Full Product Name | Color | Diameter |
|------------|--|-------|----------|------------|---|-------|----------|
| 38112000 | LL120X LED160S/840 2x PSU WB 7 WH | White | - | 38157100 | LL121X LED80S/840 1x PSU WB 7 WH | White | - |
| 38113700 | LL120X LED160S/840 2x PSD NB 7 VLC WH | White | - | 38158800 | LL120X LED160S/865 2x PSD MB 7 VLC WH | White | - |
| 38114400 | LL121X LED80S/840 1x PSU DA20 5 WH | White | - | 38159500 | LL121X LED76S/830 1x PSD WB 9 WH | White | - |
| 38115100 | LL120X LED152S/830 2x PSD WB 7 VLC WH | White | - | 38160100 | LL121X LED80S/865 1x PSD WB 7 WH | White | - |
| 38116800 | LL120X LED152S/830 2x PSU MB 5 WH | White | - | 38161800 | LL120X LED160S/840 2x PSU MB 7 WH | White | - |
| 38117500 | LL120X LED160S/840 2x PSU VVB 5 WH | White | - | 38162500 | LL121X LED76S/830 1x PSU VVB 7 EL3 WH | White | - |
| 38118200 | LL121X LED76S/830 1x PSD WB 7 WH | White | - | 38163200 | LL121X LED76S/830 1x PSU A 5 WH | White | - |
| 38119900 | LL120X LED160S/840 2x PSD A 7X2.5 VLC WH | White | - | 38165600 | LL121X LED80S/840 1x PSU DA20 7 EL3 WH | White | - |
| 38120500 | LL121X LED80S/840 1x PSD NB 7 WH | White | - | 38166300 | LL121X LED80S/840 1x PSD A 7X2.5 WH | White | - |
| 38122900 | LL121X LED80S/840 1x PSU VVB 5 WH | White | - | 38167000 | LL121X LED80S/840 1x PSU NB 7 EL3 WH | White | - |
| 38123600 | LL121X LED80S/840 1x PSU WB 7 EL3 WH | White | - | 38168700 | LL120X LED160S/840 2x PSU NB 7 WH | White | - |
| 38124300 | LL121X LED80S/840 1x PSD MB 7 WH | White | - | 38169400 | LL121X LED76S/830 1x PSU VVB 7 WH | White | - |
| 38127400 | LL121X LED80S/840 1x PSU NB 5 WH | White | - | 38171700 | LL121X LED80S/840 1x PSU NB 7 WH | White | - |
| 38128100 | LL121X LED80S/840 1x PSD NB 9 WH | White | - | 38173100 | LL121X LED76S/830 1x PSD A 7 WH | White | - |
| 38129800 | LL120X LED160S/840 2x PSU A 5 WH | White | - | 38175500 | LL120X LED160S/840 2x PSU VVB 7 WH | White | - |
| 38130400 | LL122X LED80S/840 1x PSU WB 5 WH | White | - | 38176200 | LL121X LED80S/840 1x PSU VVB 7 WH | White | - |
| 38131100 | LL122X LED80S/840 1x PSU VVB 5 WH | White | - | 38177900 | LL121X LED80S/865 1x PSD MB 9 WH | White | - |
| 38132800 | LL121X LED76S/830 1x PSU MB 5 WH | White | - | 38178600 | LL122X LED80S/840 1x PSU WB 5X2.5 WH | White | - |
| 38133500 | LL121X LED80S/840 1x PSD WB 9 EL3 WH | White | - | 38179300 | LL120X LED160S/840 2x PSU VVB 5X2.5 WH | White | - |
| 38134200 | LL120X LED160S/840 2x PSD MB 9 VLC WH | White | - | 38180900 | LL122X LED80S/840 1x PSU VVB 5X2.5 WH | White | - |
| 38136600 | LL120X LED160S/840 2x PSD DA20 7 VLC WH | White | - | 38181600 | LL121X LED80S/840 1x PSU VVB 5X2.5 WH | White | - |
| 38137300 | LL121X LED80S/840 1x PSD DA20 7 WH | White | - | 38182300 | LL122X LED80S/840 1x PSU NB 5X2.5 WH | White | - |
| 38138000 | LL120X LED160S/840 2x PSD A 7 VLC WH | White | - | 38183000 | LL122X LED80S/840 1x PSD WB 7X2.5 WH | White | - |
| 38139700 | LL121X LED80S/840 1x PSU A 5 WH | White | - | 38184700 | LL120X LED160S/840 2x PSD VVB 7X2.5 VLC | White | - |
| 38140300 | LL120X LED152S/830 2x PSU A 5 WH | White | - | 38185400 | LL122X LED80S/840 1x PSD VVB 7X2.5 WH | White | - |
| 38141000 | LL120X LED160S/865 2x PSD VVB 7 VLC WH | White | - | 38186100 | LL121X LED80S/840 1x PSD VVB 7X2.5 WH | White | - |
| 38143400 | LL121X LED80S/840 1x PSD MB 9 WH | White | - | 38187800 | LL122X LED80S/840 1x PSD NB 7X2.5 WH | White | - |
| 38144100 | LL121X LED80S/840 1x PSD VVB 7 WH | White | - | 38188500 | LL121X LED80S/840 1x PSU MB 7 EL3 WH | White | - |
| 38145800 | LL121X LED80S/840 1x PSU MB 7 WH | White | - | 38189200 | LL120X LED160S/865 1x PSD MB 7 WH | White | - |
| 38146500 | LL122X LED80S/840 1x PSD VVB 7 WH | White | - | 38190800 | LL120X LED160S/865 2x PSU MB 5 WH | White | - |
| 38148900 | LL120X LED160S/865 2x PSU WB 5 WH | White | - | 38191500 | LL121X LED80S/840 1x PSD NB 9 EL3 WH | White | - |
| 38149600 | LL122X LED80S/840 1x PSD WB 9 WH | White | - | 38089500 | LL120X LED150S/840 2x PSD O 7 VLC WH | White | - |
| 38150200 | LL121X LED80S/840 1x PSU WB 7X2.5 WH | White | - | 38100700 | LL120X LED150S/840 2x PSU O 5 WH | White | - |
| 38151900 | LL120X LED152S/830 2x PSD DA20 7 VLC WH | White | - | 38102100 | LL121X LED75S/840 1x PSD O 7 WH | White | - |
| 38152600 | LL121X LED76S/830 1x PSU DA20 5 WH | White | - | 38090100 | LL120X LED150S/840 1x PSD O 7 WH | White | - |
| 38153300 | LL121X LED80S/840 1x PSU NB 7X2.5 WH | White | - | 38142700 | LL120X LED150S/865 2x PSU O 5 WH | White | - |
| 38154000 | LL121X LED76S/830 1x PSU VVB 5 WH | White | - | 98887900 | LL120X LED150S/840 2x PSU PCO 5 WH | white | - |
| 38155700 | LL121X LED80S/840 1x PSD A 7 WH | White | - | 98768100 | LL121X LED75S/840 1x PSU PCO 5 WH | white | - |
| 38156400 | LL122X LED76S/830 1x PSU VVB 7 WH | White | - | | | | |

CoreLine Trunking


Polar Wide Diagrams

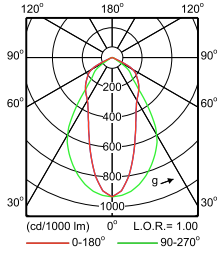


IFPS_LL120X 1xLED152S/830 NB-Polar Normal (separate)

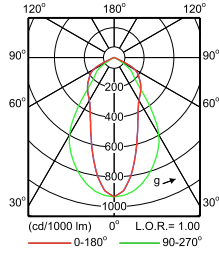


IFPS_LL121X 1xLED76S/830 NB-Polar Normal (separate)

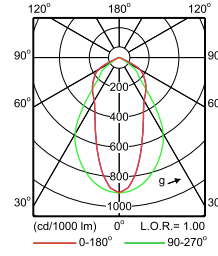


IFPS_LL121X 1xLED80S/840 NB-Polar Normal (separate)

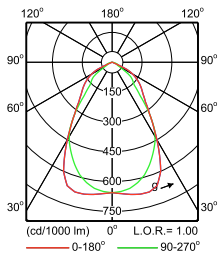


IFPS_LL120X 1xLED152S/830 MB-Polar Normal (separate)

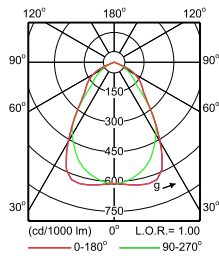


IFPS_LL120X 1xLED90S/840 MB-Polar Normal (separate)

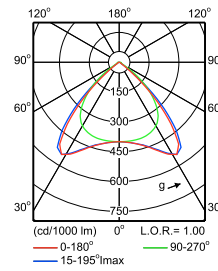


IFPS_LL121X 1xLED45S/840 WB-Polar Normal (separate)

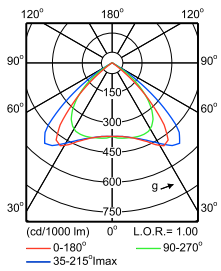

IFPS_LL121X 1xLED80S/840 WB-Polar Normal (separate)

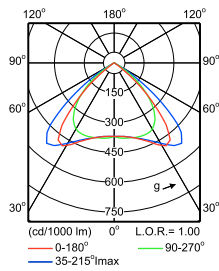




IFPS_LL120X 1xLED152S/830 WB-Polar Normal (separate)



IFPS_LL121X 1xLED45S/840 DA20-Polar Normal (separate)

CoreLine Trunking


Polar Wide Diagrams

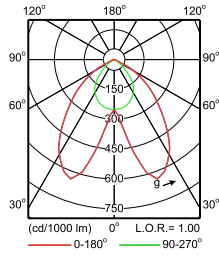

IFPS_LL121X 1xLED80S/840 DA20-Polar
 Normal (separate)

IFPS_LL120X 1xLED152S/830 DA20-Polar
 Normal (separate)

IFPS_LL120X 1xLED152S/830 VWB-Polar
 Normal (separate)

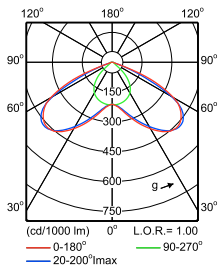

IFPS_LL120X 1xLED90S/840 VWB-Polar
 Normal (separate)

