



Przystępne cenowo światłówki LEDspot

CorePro LEDspot LV

Światłówki CorePro LEDspot to idealne rozwiązanie do instalacji oświetlenia punkowego. Emitują ciepłe światło podobne jak ze źródeł halogenowych. Pasują do większości istniejących opraw z uchwytyami MR16 GU5.3 i zostały zaprojektowane jako zamienniki lamp halogenowych i żarówek. Lampy CorePro LEDspot to doskonała energooszczędność i bardzo niskie koszty konserwacji.

Korzyści

- oszczędność energii do 80% w porównaniu z lampami halogenowymi
- Niższe koszty konserwacji
- Współpraca z wieloma transformatormi

Cechy

- Łatwa modernizacja
- Okres eksploatacji 15 000 godzin
- Światło bez promieniowania ultrafioletowego ani podczerwonego
- Nie zawiera rtęci ani materiałów niebezpiecznych

Zastosowanie

- Hotele, restauracje, bary, kawiarnie, muzea, sklepy
- Hole, korytarze, klatki schodowe, łazienki, recepcje, miejsca wystawowe, szafy ekspozycyjne

CorePro LEDspot LV

Wersje



CorePro LEDspot LV 35W GU5-3
827 36D ND





LEDspots Corepro SLR 2 MR16
GU5,3



LEDspot GU4 Classic MR11

Rysunki techniczne



Product	D	C
CorePro LED spot ND 2.9-20W MR16 827 36D	50,5 mm	45,5 mm
CorePro LED spot ND 4.4-35W MR16 827 36D	50,5 mm	45,5 mm
CorePro LED spot ND 4.4-35W MR16 840 36D	50,5 mm	45,5 mm
CorePro LED spot ND 7-50W MR16 827 36D	50,5 mm	45 mm
CorePro LED spot ND 7-50W MR16 830 36D	50,5 mm	45 mm
CorePro LED spot ND 7-50W MR16 840 36D	50,5 mm	45 mm

Product	D	C
CorePro LED spot 2.3-20W 827 MR11 36D	35,5 mm	39,5 mm

CorePro LEDspot LV

Informacje ogólne	
Cykl Przelączania	50 000
Dane techniczne oświetlenia	
Kąt rozsyłu światła (Nom)	36 °
Wskaźnik oddawania barw (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Eksploatacja i połączenie elektryczne	
Częstotliwość wejściowa	- Hz
Częstotliwość linii	- Hz
Czas uruchomienia (Nom)	0,5 s
Układy sterowania i ściemnianie	
Z możliwością przyciemniania	Nie

Informacje ogólne

Order Code	Full Product Name	Podstawa-nasadka	Nominalny okres eksploatacji
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	GU5.3	15 000 h
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	GU5.3	15 000 h
81471000	CorePro LED spot ND 7-50W MR16 827 36D	GU5.3	15 000 h
81477200	CorePro LED spot ND 7-50W MR16 830 36D	GU5.3	15 000 h
81479600	CorePro LED spot ND 7-50W MR16 840 36D	GU5.3	15 000 h
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	GU5.3	15 000 h
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	GU4	25 000 h

Dane techniczne oświetlenia

Order Code	Full Product Name	Skorelowana			
		Temperatura Barwowa (Nom)	Kod barwy	Strumień Świetlny	Światłość (Nom)
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	2700 K	827	345 lm	650 cd
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	4000 K	840	390 lm	750 cd
81471000	CorePro LED spot ND 7-50W MR16 827 36D	2700 K	827	621 lm	1 400 cd
81477200	CorePro LED spot ND 7-50W MR16 830 36D	3000 K	830	621 lm	1 400 cd

Order Code	Full Product Name	Skorelowana			
		Temperatura Barwowa (Nom)	Kod barwy	Strumień Świetlny	Światłość (Nom)
81479600	CorePro LED spot ND 7-50W MR16 840 36D	4000 K	840	660 lm	1 500 cd
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	2700 K	827	230 lm	560 cd
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	2700 K	827	184 lm	400 cd

Eksploatacja i połączenie elektryczne

Order Code	Full Product Name	Zużycie energii	Równoważna moc w watach
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	4,4 W	35 W
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	4,4 W	35 W
81471000	CorePro LED spot ND 7-50W MR16 827 36D	7 W	50 W
81477200	CorePro LED spot ND 7-50W MR16 830 36D	7 W	50 W

Order Code	Full Product Name	Zużycie energii	Równoważna moc w watach
81479600	CorePro LED spot ND 7-50W MR16 840 36D	7 W	50 W
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	2,9 W	20 W
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	2,3 W	20 W

Temperatura

CorePro LEDspot LV

Order Code	Full Product Name	Maksymalna temperatura obudowy (Nom)
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	85 °C
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	85 °C
81471000	CorePro LED spot ND 7-50W MR16 827 36D	85 °C
81477200	CorePro LED spot ND 7-50W MR16 830 36D	85 °C

Order Code	Full Product Name	Maksymalna temperatura obudowy (Nom)
81479600	CorePro LED spot ND 7-50W MR16 840 36D	85 °C
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	75 °C
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	60 °C



Mechanika i korpus

Order Code	Full Product Name	Wykończenie żarówki	Kształt bańki
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	-	MR16
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	-	MR16
81471000	CorePro LED spot ND 7-50W MR16 827 36D	-	MR16
81477200	CorePro LED spot ND 7-50W MR16 830 36D	-	MR16


Order Code	Full Product Name	Wykończenie żarówki	Kształt bańki
81479600	CorePro LED spot ND 7-50W MR16 840 36D	-	MR16
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	-	MR16
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	Przezroczyste	MR11

Certyfikaty i zastosowania


Order Code	Full Product Name	Zużycie energii elektrycznej w kWh/1000 h
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	5 kWh
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	5 kWh
81471000	CorePro LED spot ND 7-50W MR16 827 36D	7 kWh
81477200	CorePro LED spot ND 7-50W MR16 830 36D	7 kWh
81479600	CorePro LED spot ND 7-50W MR16 840 36D	7 kWh
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	3 kWh
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	3 kWh

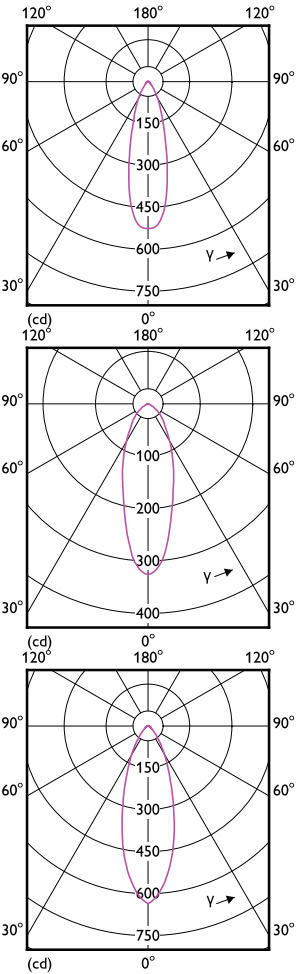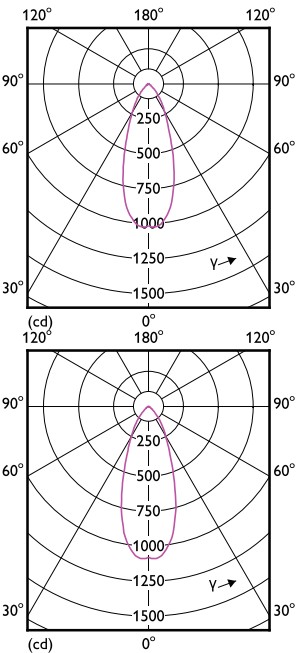


CorePro LEDspot LV




Accent Diagrams




Accent Diagram - CorePro LED spot ND 2.9-20W MR16 827 36D




Accent Diagram - CorePro LED spot ND 7-50W MR16 840 36D




Accent Diagram - CorePro LED spot ND 7-50W MR16 830 36D



Accent Diagram - CorePro LED spot 2.3-20W 827 MR11 36D




Accent Diagram - CorePro LED spot ND 4.4-35W MR16 840 36D




Accent Diagram - CorePro LED spot ND 4.4-35W MR16 827 36D


Rozsył

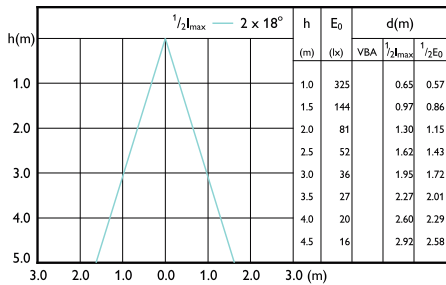


Beam diagram - CorePro LED spot 2.3-20W 827 MR11 36D

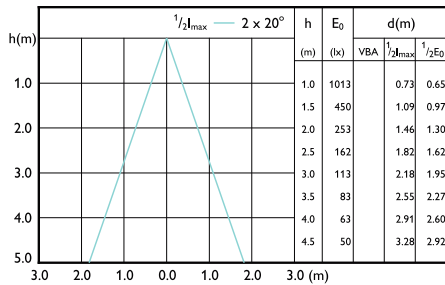


Beam diagram - CorePro LED spot ND 7-50W MR16 830 36D

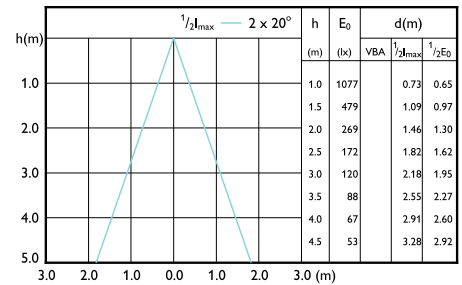


Beam diagram - CorePro LED spot ND 7-50W MR16 840 36D

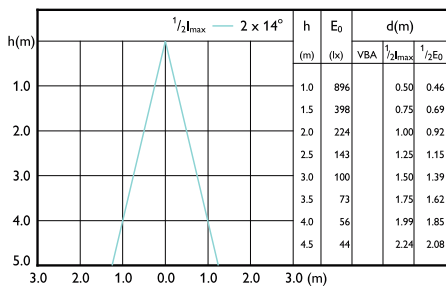

Beam diagram - CorePro LED spot ND 4.4-35W MR16 840 36D

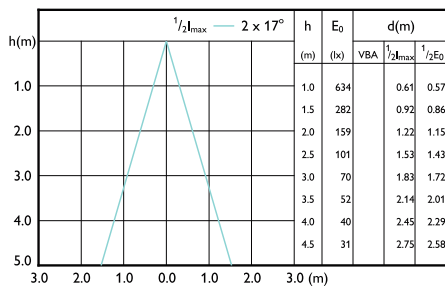

Beam diagram - CorePro LED spot ND 4.4-35W MR16 827 36D

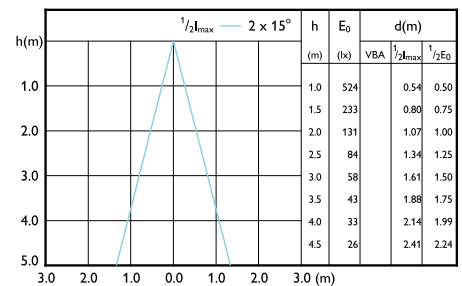

Beam diagram - CorePro LED spot ND 2.9-20W MR16 827 36D

