



CoreLine Trunking

LL121X LED76S/830 1x PSU MB 5 WH

CoreLine Trunking - 3 pcs - LED Module, system flux 7600 lm -
 Power supply unit - Medium beam - - - 5 conductors - - -
 Feed-through wiring 5-phase - Ceiling-mounting bracket -
 White - - - -

Whether for a new facility or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Trunking range of LED products can be used to replace general lighting. The process of selecting, installing and maintaining is so easy – it’s a simple switch.

Product data

General Information		Connection	
Number of light sources	3 [3 pcs]	Cable	-
Lamp family code	LED76S [LED Module, system flux 7600 lm]	Protection class IEC	Safety class I (I)
Beam angle of light source	120 °	Mounting	SMB [Ceiling-mounting bracket]
Light source color	830 warm white	Ready-to-install	-
Light source replaceable	No	Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Number of gear units	1 unit	Flammability mark	F [For mounting on normally flammable surfaces]
Driver/power unit/transformer	PSU [Power supply unit]	Accessories included	MB-SW [Mounting bracket for suspension wire]
Driver included	Yes	CE mark	CE mark
Optic type	MB [Medium beam]	ENEC mark	ENEC mark
Optical cover/lens type	No [-]	Warranty period	3 years + 2 years upon registration
Luminaire light beam spread	76° x 74°	Mechanical accessories	No [-]
Emergency lighting	No [-]	Remarks	*-Per Lighting Europe guidance paper **Evaluating performance of LED based
Control interface	-		
Internal wiring	Standard		
Feed-through wiring	Feed-through wiring 5-phase		

CoreLine Trunking

	luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
--	---

Constant light output	No
Number of products on MCB of 16 A type B	24
RoHS mark	RoHS mark
Product family code	LL121X [CoreLine Trunking]
Unified glare rating CEN	Not applicable

Light Technical

Light Distribution	DIR [Direct lighting]
--------------------	------------------------

Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Circuit	No [-]
Circuit option	5 [5 conductors]
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	19 A
Inrush time	0.28 ms
Power Factor (Min)	0.97

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing Material	Steel
Reflector material	-
Optic material	Acrylate
Optical cover/lens material	Acrylate
Fixation material	Steel
Optical cover/lens finish	Frosted
Overall length	1730 mm
Overall width	95 mm
Overall height	52 mm
Height	52 mm

Diameter	-
Color	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	7600 lm
Luminous flux tolerance	+/-1%
Initial LED luminaire efficacy	141 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	54 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80

Application Conditions


Ambient temperature range	-20 to +35 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	No

Product Data

Full product code	871869638132800
Order product name	LL121X LED76S/830 1x PSU MB 5 WH
EAN/UPC - Product	8718696381328
Order code	38132800
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925864012
Net Weight (Piece)	3.690 kg



CoreLine Trunking

Dimensional drawing

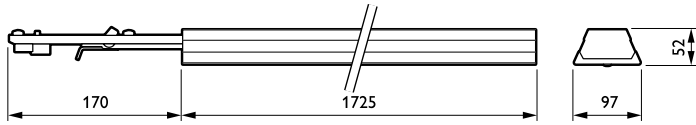

CoreLine electr. units LL120X-LL122X

Photometric data



IFPC1_LL121X1xLED76S830MB

IFGU1_LL121X1xLED76S830MB

