



Xitanium LED Driver Outdoor Dimmable (US)

Xitanium 75W 120-277V 0.70A 0-10V

Xitanium Outdoor LED Drivers are available in wattages from 40W to 150W for hard-wire integration into outdoor luminaires for the most rugged applications. These drivers operate to specification under wide temperature and electrical ranges to ensure reliability. 1-10V dimming enables luminaires to be easily connected to a wide variety of sensors and control systems to facilitate dimming, thus maximizing energy savings.

Product data

General Information		Primary Fusing	
Lighting Technology	LED	Primary Fusing	Fused
		Input Wire Gauge	18
Operating and Electrical		Temperature	
Line Frequency	50 to 60 Hz	T-Case Maximum (Max)	176 °F
Input Frequency	50 to 60 Hz		
Total Harmonic Distortion IEC (Max)	20 %	Controls and Dimming	
Power Consumption	84 W	Control Interface	0-10V
Output Current (Nom)	700 mA	Dimming Range	100-10 %
Output Current Tolerance (Max)	5 %		
Output Current Tolerance (Min)	-5 %	Approval and Application	
Input Current (Max)	700 mA	Short Circuit Protection	Protected
Output Power (Nom)	75 W	EMI Standard	FCC 47 Part 15; Class A
		Environmental Standard	UL Damp & Dry
Wiring		Approval Marks	RoHS compliance CSA certificate
Output Wire Length	10-5/8 inch		


Xitanium LED Driver Outdoor Dimmable (US)

Product Data

Order product name	Xitanium 75W 120-277V 0.70A 0-10V
Full product name	Xitanium 75W 120-277V 0.70A 0-10V
Order code	929000725013
Material Nr. (12NC)	929000725013
Numerator - Quantity Per Pack	1

EAN/UPC - Product/Case	781087137543
Numerator - Packs per outer box	12
EAN/UPC - Case	50781087137555

Dimensional drawing

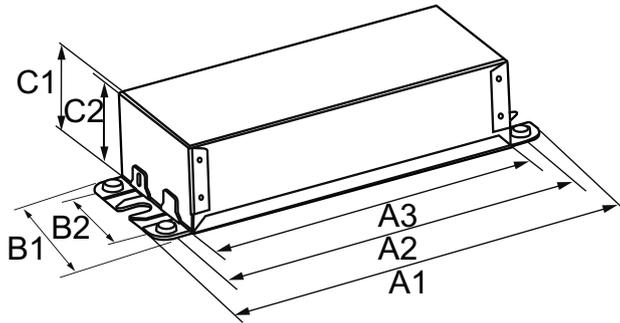

Product	B2	C1	A1	A2	B1
Xitanium 75W 120-277V 0.70A 0-10V	1-11/16 inch	1-1/2 inch	6-5/8 inch	6-1/16 inch	2-3/8 inch

