



Xitanium LED Driver Outdoor Dimmable (US)

Xitanium 75W 120-277V 0.70A 0-10V

Xitanium Outdoor LED Drivers are available in wattages from 40W to 150W for hard-wire integration into outdoor luminaires for the most rugged applications. These drivers operate to specification under wide temperature and electrical ranges to ensure reliability. 1-10V dimming enables luminaires to be easily connected to a wide variety of sensors and control systems to facilitate dimming, thus maximizing energy savings.

Product data


General Information		Primary Fusing	
Lighting Technology	LED	Fused	
Operating and Electrical		Input Wire Gauge	
Line Frequency	50 to 60 Hz	18	
Input Frequency	50 to 60 Hz	Temperature	
Total Harmonic Distortion IEC (Max)	20 %	T-Case Maximum (Max)	
Power Consumption	84 W	80 °C	
Output Current (Nom)	700 mA	Controls and Dimming	
Output Current Tolerance (Max)	5 %	Control Interface	
Output Current Tolerance (Min)	-5 %	0-10V	
Input Current (Max)	700 mA	Dimming Range	
Output Power (Nom)	75 W	100-10 %	
Wiring		Approval and Application	
Output Wire Length	270.0 mm	Short Circuit Protection	
		Protected	
		EMI Standard	
		FCC 47 Part 15; Class A	
		Environmental Standard	
		UL Damp & Dry	
		Approval Marks	
		RoHS compliance CSA certificate	

Xitanium LED Driver Outdoor Dimmable (US)

Product Data	
Order product name	Xitanium 75W 120-277V 0.70A 0-10V
Full product name	Xitanium 75W 120-277V 0.70A 0-10V
Order code	929000725013
Material Nr. (12NC)	929000725013
Numerator - Quantity Per Pack	1

EAN/UPC - Product/Case	781087137543
Numerator - Packs per outer box	12
EAN/UPC - Case	50781087137555

Dimensional drawing

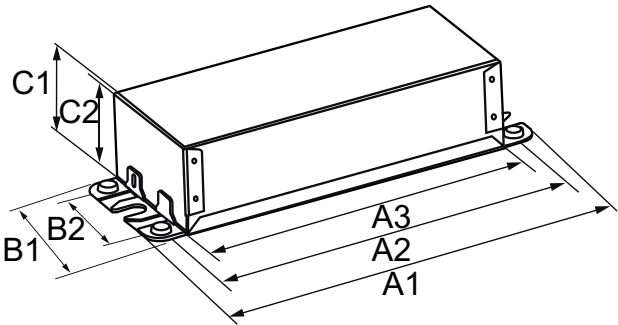

Product	B2	C1	A1	A2	B1
Xitanium 75W 120-277V 0.70A 0-10V	42.9 mm	38 mm	168 mm	153 mm	59.1 mm

