



EasyLyte downlights are adaptable, and flexible for your changing project needs. EasyLyte is your best choice without sacrificing ease of installation or product quality. Ideal for use in open office, healthcare, design build, and other light commercial applications.

Standard luminaire = Frame + Engine/Trim + Accessories (optional)

Project: _____

Location: _____

Cat.No: _____

Type: _____

Qty: _____

Notes: _____

Frame

example: 6RN

Series	Aperture	Installation	Options
6	R		
6 Uniframe 6-inch	R Round	N New construction (Non-IC) R Remodeler (Non-IC) A AirSeal (IC) ¹	— Universal 120/277/347V ² LC Chicago Plenum ³ EM6 Emergency, 6W Self-Test/Self-Diagnostic (not available for BAC) ^{3,4} 3 347V (for non-Z10 configurations) RADIO Integral Interact-enabled RF sensor (120/277/347V) (enables wireless connected lighting control) ^{3,5} requires above ceiling access

Engine / Trim

example: Z4RDL20935WOCZ10U

Series	Lumen	CRI/CCT	Beam	Style	Reflector	Flange	Dimming	Voltage
Z6RDL			W					
Z6RDL EasyLyte 6-inch Round downlight	05 500lm 10 1000lm 15 1500lm 20 2000lm 25 2500lm 30 3000lm 35 3500lm	927 90CRI / 2700K 930 90CRI / 3000K 935 90CRI / 3500K 940 90CRI / 4000K 950 90CRI / 5000K	W Wide	O Open S Step baffle	WH White BK Black DB Dark Bronze CD Clear Diffuse	— White (matte) BK Black (matte)	Z10 0-10V 1% L Lutron LDE1 EcoSystem (not avail. with 500lm) E ELV ⁶ P Power over Ethernet (PoE)	U 120/277V 3 347V ^{7,8} (Z10 only) U 120/277/347V 1 120V E Ethernet 48V DC

Accessories (Not currently BAA-compliant - learn more on page 2)

SBA	Interact Ready System Bridge Accessory with integral occupancy and daylight sensor (compatible with all 0-10V options, see SBA spec sheet) ⁹
CAEM6	Field installable Bodine BSL6 6W battery pack with self-test/self-diagnostic for use with new construction frames, 120-277V
AMS	ActiLume multi-sensor (optional accessory for PoE configurations)
CAEM6TSCP	Surface mount cover plate to remote mount test switch for EM6 frame option.

Sloped Ceiling

example: 7925MD

Series	Degree of Slope
7925 Sloped Ceiling Adapter 6"	MC 5° MF 20° MD 10° MG 25° ME 15° MH 30°

- There is a 3000lm (30) limit with 6" (6RA) IC housings.
- Universal 120-347V is for 0-10v (Z10) dimming configurations only.
For 347V non-Z10 dimming, order 347V (3) frame with (U) light engine/trim.
- Interact Pro (RADIO), Emergency (EM6) and Chicago Plenum (LC) are only available with New construction (N) installs.
- EM6 option compatible with new construction (N) frame only. Order CAEM6TSCP ceiling mounting plate accessory for remote mounted test switch. EM6 option not compatible with Power over Ethernet or 347V configurations.
- Integral Interact-enabled RF sensor enables network lighting control; to be specified with 0-10V light engines only.
- ELV (E) dimming is only compatible with 1000lm (10), 1500lm (15), 2000lm (20) configurations.
Not compatible with 347V frame options.
- Specify standard UNV frame for use with 347V light engines.
- The 347V light engine voltage option is available only with Z10 dimming option.
For other dimming protocols order (U) light engine and 347V (3) frame.
- Requires IRT9015 IR remote & Interact Pro App for commissioning.



Z6RDL EasyLyte 6"

Round Downlight

Features

Optics

- Provides a 70° cutoff (physical and reflected)
- Wide beam distribution for general illumination
- Spun aluminum outer reflector with integral flange painted white
- Injection molded plastic trim inserts in splay and baffle options
- Reflectors available in painted clear diffuse, white, black and dark bronze

Quality of light

- Lumen Maintenance: L70 at 60,000 hours
- Color consistency: 2 SDCM
- 90 CRI minimum

Construction (New Construction)

- Galvanized stamped steel for dry / plaster ceilings.
- Pre-installed telescoping mounting bars (13" - 24")
- Frame accommodates C- channel, black iron, and 3/4" EMT for mounting distances greater than 24" between joists.
- Manufactured from 20 gage galvanized steel construction with rolled edge aperture to guide cutting tools for perfect hole cutting.

**Max ceiling thickness is 2" (51 mm).
Including PoE frame 4.88" (124 mm).**

Patented install Mounting frame

- Pre-installed mounting bars allow for fast and tool-less install into T-grid and hat channel ceilings
- Close-cut aperture design eliminates an undesired gap between ceiling material and reflector.
- Simple plug-and-play connection between frame and light engine from below the ceiling allows for:
 - Easy upgrades
 - Technology changes
 - Repairs and troubleshooting

Dimming

120/277V

- Advance 0-10V 1% dimming
- Lutron Hi-lume EcoSystem H Series 1% dimming

347V

- Integral 347V drivers available for 0-10v (Z10) light engine configurations with standard universal frames.
- For 347V and non-0-10v dimming, order (U) light engine and 347V (3) frame (includes step down transformer). Not compatible with ELV dimming.

Emergency

Remote ceiling mounted test switch. Accessory ceiling mounting plate available (CAEM6TSCP) for remote mounted test switch. See Calculite-LyteProfile-EasyLyte Emergency Battery Pack specification sheet for more details.

Power over Ethernet

Powered via Philips PoE lighting controller: complies with FCC rules per Title 47 part 15 (Class A) for EMI / RFI (conducted & radiated). PoE lighting controller accessible from below ceiling.

Rated life: 60,000 hrs at 70% lumen maintenance based on IES LM-80-08 and TM-21-11.

Sloped Ceiling Adapter

Material: 16 ga. spun aluminum, matte white finish.

Installation: Installs with standard recessed fixture in sloped ceilings without changing the vertical axis of the fixture or its lighting characteristics.

Perforated Tabs (4): Provide temporary support for the slope ceiling adapter during installation.

Locking Screws (4): Secure slope ceiling adapter to mounting frame of fixture.

Support: Fixture must be supported by ceiling structure — not Slope Ceiling Adapter.

Options and Accessories

Field Installed Emergency: Refer to Calculite-Lyte-Profile-EasyLyte Emergency Battery Pack specification sheet for more details.

CAEM6: Field install EM6 kit with Bodine BSL6 6W battery pack with self-test/self-diagnostic, mounts to new construction frame. Includes ceiling plate for remote test switch.

CAEM6TSCP: Ceiling cover plate for remote mounted EM6 test switch. 1" (25mm) hole, 4 3/8" (109mm) x 2 3/8" (69mm) rectangular. Includes two mounting screws.

Labels and Listings

- cULus listed for wet location
- RoHS certified
- Consult factory for Buy America Compliance

Warranty



5 year limited warranty
Visit Signify.com/warranties for more information on Signify's standard 5-year limited warranty on complete luminaire systems.

Finishes



White

Brightest aperture when illuminated and provides the smoothest transition to most ceilings when off (only available with a white flange).



Black

Specular finish that provides the lowest aperture brightness possible and reduces source identification in a ceiling significantly.



Dark Bronze

Specular finish that provides the lowest aperture brightness possible and reduces source identification in a ceiling significantly.



Clear diffuse

Slightly diffuse clear finish that softens the light and reduces the mirror image effect with traditional aluminum specular finishes (only available with a white flange).

Z6RDL EasyLyte 6"

Round Downlight


interact

	Gateway Connected		
	Standalone	Option 1	Option 2
Dimming, grouping, and zoning	✓	✓	✓
Bluetooth and ZigBee enabled	✓	✓	✓
Motion sensing and daylight harvesting	✓	✓	✓
Integration with 0-10V and phase dimming fixtures	✓	✓	✓
Code compliance	✓	✓	✓
Granular dimming and dwell time	✓	✓	✓
Correlated color temperature (CCT) tuning by switch	New	✓	✓
Support for sensor-based Tunable White luminaires	New	✓	✓
Energy reporting and monitoring		✓	✓
Scheduling		✓	✓
Demand response		✓	✓
BMS integration (BACnet)			✓
Floor plan visualization			✓
IoT sensors for wellness			✓
IoT Apps for productivity			✓

Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
• Luminaires with integrated sensors	150
• Smart TLEDs	150
• Zones + groups	64
Total number of ZGP devices (sensors and switches)	50
• Sensors	30
• Switches	50
Group level	
Recommended number of lights	40 (maximum 150)
Number of ZGP devices	5
Number of scenes	16

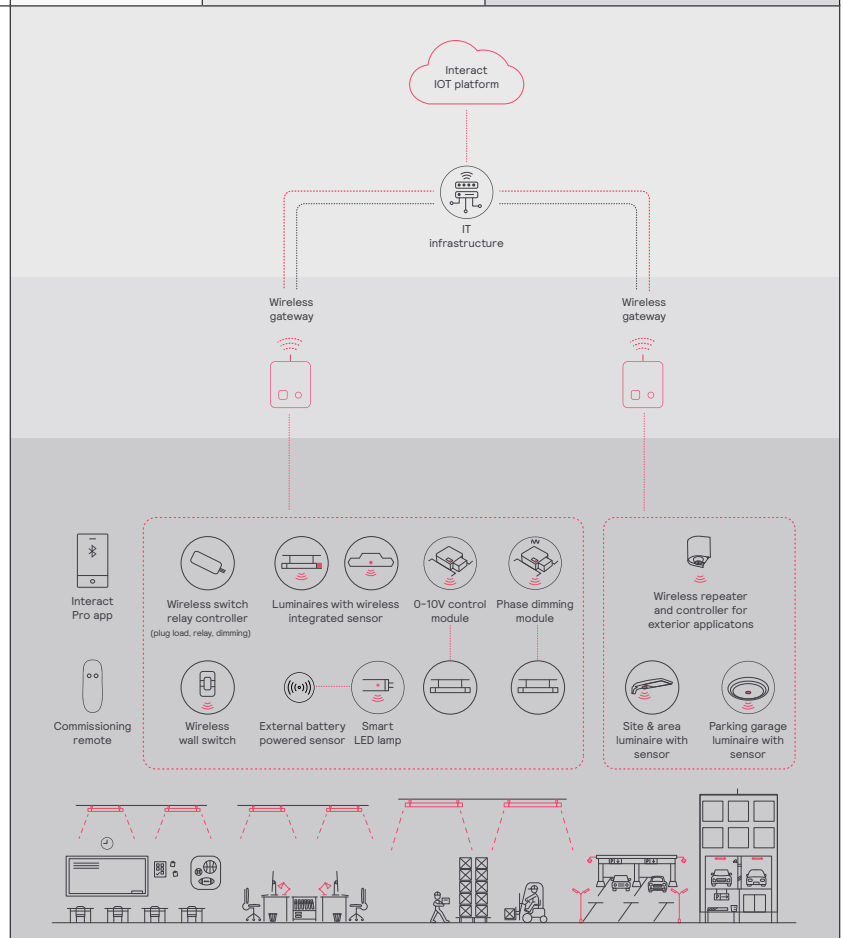

Z6RDL EasyLyte 6"

Round Downlight

Wireless controls options

Interact

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the standalone mode (similar to SpaceWise) when configured without a gateway or in a cloud connected mode if a compatible gateway is used.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity. The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote on-site to identify and group devices together.

Compatible with:

- SWS200 & UID8465 wireless scene switch
- Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
- Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
- LCN3110: battery powered IP65 presence sensor, OCC sensor IA CM IP65W
- LCN3120: battery powered IP65 presence & daylight sensor, OCC-DL sensor IA CM IP65 WH
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

Radio only sensor (RA or RADIO)

- Integral RA or RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity. The App provides flexibility to choose between a gateway or non-gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely, identify and group devices together onsite.
- Compatible with SWS200 and UID8465 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

Sensor bundle (IAOSB or SB)

- A wireless IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- View all your projects under one dashboard and easily compare insights from multiple projects in one view.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1) and wireless Occupancy or Daylight & Occupancy sensors available. Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- IAOSB or SB option in addition to occupancy and daylights sensing supports advanced IoT capabilities, such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Requires compatible Gateway and internet connectivity for commissioning.
- For more information, visit: interact-lighting.com/interactproscalablesystem

Emergency Options (ER100)

- **Power Sensing** (factory default) – Recommended UL924 option requires unswitched power sense line, absence of voltage on the normal circuit triggers luminaire to 100% output.
- **Power Interruption Detection** (field option) – Detects AC power interruption >30ms triggers 90 minute emergency mode with luminaire at 100% output.

Wired controls options

Interact (PoE):

- PoE based IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- Test switch and indicator light mounted on side of chassis on one end.
- Supports advanced IoT Apps on Personal Control, Space Management, wayfinding, room/desk reservation and offers open APIs for light control and data exchange.
- Integral sensor option for occupancy sensing (PIR) and/or daylight harvesting available for additional energy savings.
- Optional integral emergency controller and battery pack provides 600lm nominal output.
- PoE lighting controller is accessible from below.
- Emergency battery has a 3 month pre-installed shelf life, and must be stored and installed in environments of 20C to 30C (-4F to 86F) ambient, and 45-85% relative humidity.
- For more information on Interact Office Wired, visit: interact-lighting.com/office or www.usa.lighting.philips.com/systems/system-areas/offices.

Interact supported sensor option codes across Genlyte product lines

	Evokit	Day-Brite	Ledalite	Lightolier
ZigBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZigBee + Bluetooth	RADIO	RADIO	RA	RA
ZigBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZigBee + Highbay + Sensing	-	SWZCSH	-	-

Z6RDL EasyLyte 6"

Round Downlight



AccuRender Technology (CRI 90+)

The right light brings colors to life. Our new AccuRender technology helps ensure colors are rendered more accurately and consistently, while doing so as efficiently as CRI 80 products.



Standard CRI 80

Good color rendering
and high efficacy



Standard CRI 90

Better color rendering
and low efficacy



AccuRender

Best color rendering,
color preference and high efficacy

Enjoy design flexibility

Full range of products and options:

- Available soon in across Lightolier portfolio for application flexibility
- Multiple color temperatures (CCTs) and lumen packages offered

Promote savings

High efficacy, with no penalty:

- Energy efficacy compares well to conventional 80 CRI
- Up to 25% more energy savings vs competitor 90 CRI¹
- Helps meet Title 24 requirements

Show your true colors

High color rendering:

- True to life colors to help energize your environment and render better flesh tones critical for healthcare hospitality and retail applications.
- R_a up to 94 CRI • R_f up to 92 TM-30
- R_g up to 67 CRI • R_{f,h1} up to 91 TM-30
- G_a up to 99 CRI • R_g up to 100 TM-30
- C₉ up to 94 CRI • R_{cb,h1} up to -5% TM-30

Achieve color balance


Best in class color consistency:

- Promote aesthetic harmony in your space with ≤ 2 SDCM


Z6RDL EasyLyte 6"

Round Downlight


Dimensions

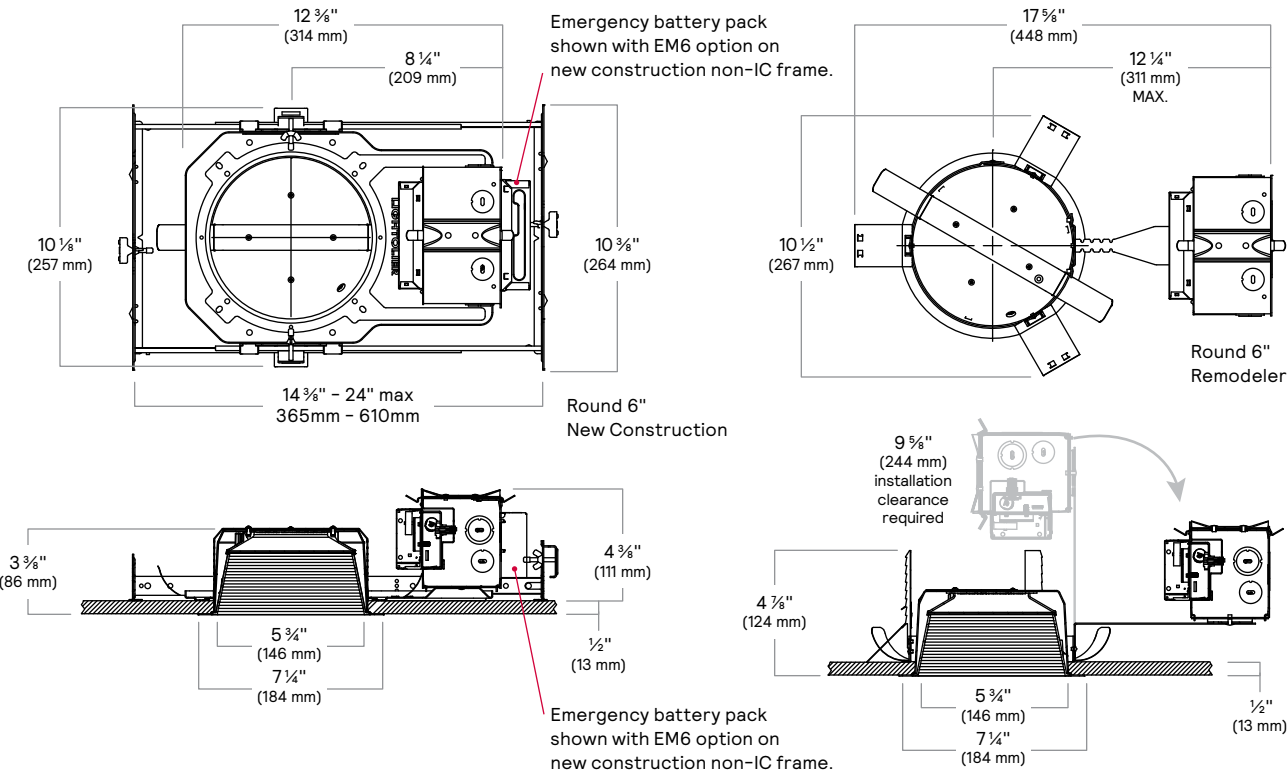

AirSeal (A)

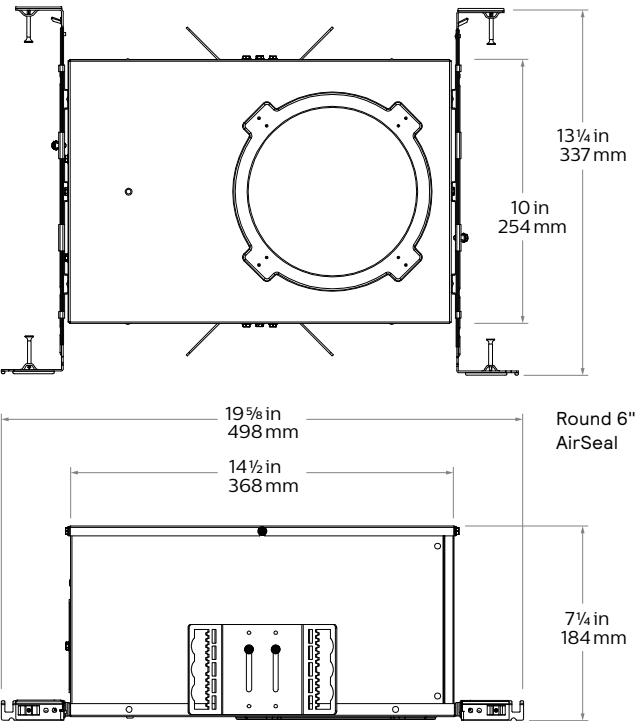

Sloped Ceiling Adapter



Electrical

All have an input frequency of 50/60Hz

Light engine	Input volts	Input Current	Input Power	LED Drive Current	LED Power	THD Factor @ Max Load	Power Factor @ Max Load
Z6*10*	120V	0.070A	8.4W	0.22A	7.1W	<10%	>0.9
	277V	0.031A	8.6W	0.22A	7.1W	<15%	>0.9
	347V	0.028A	9.9W	0.22A	7.1W	<15%	>0.9
Z6*15*	120V	0.106A	12.8W	0.33A	10.9W	<10%	>0.9
	277V	0.047A	13.1W	0.33A	10.9W	<15%	>0.9
	347V	0.042A	14.5W	0.33A	10.9W	<15%	>0.9
Z6*20*	120V	0.164A	19.6W	0.50A	16.9W	<10%	>0.9
	277V	0.071A	19.6W	0.50A	16.9W	<15%	>0.9
	347V	0.061A	21.1W	0.50A	16.9W	<15%	>0.9
Z6*25*	120V	0.204A	24.5W	0.63A	21.3W	<10%	>0.9
	277V	0.089A	24.5W	0.63A	21.3W	<15%	>0.9
	347V	0.074A	25.7W	0.63A	21.3W	<15%	>0.9
Z6*30*	120V	0.258A	31.0W	0.78A	27.0W	<10%	>0.9
	277V	0.112A	31.0W	0.78A	27.0W	<15%	>0.9
	347V	0.092A	32.1W	0.78A	27.0W	<15%	>0.9
Z6*35*	120V	0.304A	36.5W	0.90A	31.8W	<10%	>0.9
	277V	0.132A	36.5W	0.90A	31.8W	<15%	>0.9
	347V	0.108A	37.4W	0.90A	31.8W	<15%	>0.9

Z6RDL EasyLyte 6"

Round Downlight

Photometry


Reflector	Flux (lm)	Power (W)	Efficacy (lm/W)	CRI	R9	Beam Angle	Field Angle	Spacing Criterion
Open DL - Bronze	593	9.7	61.3	93	59	77°	110°	1.106
Open DL - Black	574	9.7	59.4	93	59	77°	110°	1.101
Open DL - White	917	9.7	94.8	92	53	82°	131°	1.158
Open DL - Clear Diffuse	1006	9.7	104.0	92	58	87°	124°	1.218
Baffle - Black	584	9.7	60.4	93	59	77°	110°	1.108
Baffle - White	1031	9.7	106.6	93	56	84°	135°	1.180
Baffle - Clear Diffuse	832	9.7	86.1	93	58	86°	131°	1.202
Open DL - Bronze	898	13.7	65.5	93	59	77°	110°	1.106
Open DL - Black	869	13.7	63.4	93	59	77°	110°	1.101
Open DL - White	1388	13.7	101.2	92	53	82°	131°	1.158
Open DL - Clear Diffuse	1523	13.7	111.1	92	58	87°	124°	1.218
Baffle - Black	884	13.7	64.5	93	59	77°	110°	1.108
Baffle - White	1561	13.7	113.9	93	56	84°	135°	1.180
Baffle - Clear Diffuse	1260	13.7	91.9	93	58	86°	131°	1.202
Open DL - Bronze	1321	20.2	65.5	93	59	77°	110°	1.106
Open DL - Black	1279	20.2	63.4	93	59	77°	110°	1.101
Open DL - White	2042	20.2	101.2	92	53	82°	131°	1.158
Open DL - Clear Diffuse	2241	20.2	111.1	92	58	87°	124°	1.218
Baffle - Black	1301	20.2	64.5	93	59	77°	110°	1.108
Baffle - White	2297	20.2	113.9	93	56	84°	135°	1.180
Baffle - Clear Diffuse	1854	20.2	91.9	93	58	86°	131°	1.202
Open DL - Bronze	1582	25.1	63.0	93	59	77°	110°	1.106
Open DL - Black	1531	25.1	61.0	93	59	77°	110°	1.101
Open DL - White	2445	25.1	97.4	92	53	82°	131°	1.158
Open DL - Clear Diffuse	2684	25.1	106.9	92	58	87°	124°	1.218
Baffle - Black	1558	25.1	62.0	93	59	77°	110°	1.108
Baffle - White	2750	25.1	109.5	93	56	84°	135°	1.180
Baffle - Clear Diffuse	2220	25.1	88.4	93	58	86°	131°	1.202
Open DL - Bronze	1876	31.2	60.1	93	59	77°	110°	1.106
Open DL - Black	1816	31.2	58.2	93	59	77°	110°	1.101
Open DL - White	2900	30.8	94.1	92	53	82°	131°	1.158
Open DL - Clear Diffuse	3182	31.2	102.0	92	58	87°	124°	1.218
Baffle - Black	1847	31.2	59.2	93	59	77°	110°	1.108
Baffle - White	3261	31.1	104.9	93	56	84°	135°	1.180
Baffle - Clear Diffuse	2633	31.3	84.1	93	58	86°	131°	1.202
Open DL - Bronze	2208	37.1	59.5	93	59	77°	110°	1.106
Open DL - Black	2137	37.1	57.6	93	59	77°	110°	1.101
Open DL - White	3413	37.1	91.9	92	53	82°	131°	1.158
Open DL - Clear Diffuse	3746	37.1	100.9	92	58	87°	124°	1.218
Baffle - Black	2174	37.1	58.6	93	59	77°	110°	1.108
Baffle - White	3839	37.1	103.4	93	56	84°	135°	1.180
Baffle - Clear Diffuse	3099	37.1	83.5	93	58	86°	131°	1.202

Z6RDL EasyLyte 6"

Round Downlight

Downlight, Wide beam, 3300lm Engine, 105lm/W at 31W

Candela Curves

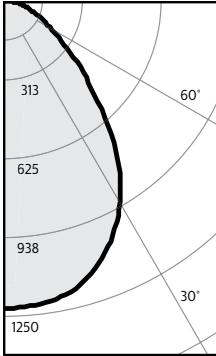

Frame: 6RN
Engine / Trim:
Z6RDL30935WSWHZ10U

Output lumens: 3262 lms
Input watts¹: 31.1 W
CRI: 90 min
CCT²: 3500K
Beam Angle: 84°
Spacing Crit.: 1.16

Zonal summary

Zone	Lumens	%Luminaire
0-30	1299	39.8%
0-40	2014	61.7%
0-60	2924	89.6%
0-90	3262	100.0%

Angle	Mean CP	Lumens
0	1720	
5	1711	163
10	1692	
15	1647	464
20	1571	
25	1465	672
30	1327	
35	1151	715
40	942	
45	726	564
50	549	
55	381	347
60	261	
65	197	197
70	148	
75	103	110
80	63	
85	27	31
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	69	5.8'
6'	48	7.0'
7'	35	8.1'
8'	27	9.3'
9'	21	10.4'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	138.0	1.38
6'	91.0	0.90
7'	65.0	0.65
8'	54.0	0.54
9'	43.0	0.43

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 104.9 lm/w
Report³: STMR-674-1

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	100	100
1	111	107	103	100	105	99	100	95	97	93	88	88	87	80	77	77	77
2	103	96	90	85	94	84	90	82	87	80	77	77	79	70	67	67	67
3	95	86	79	74	84	73	82	72	79	70	67	67	72	62	60	60	60
4	88	78	70	64	76	64	74	63	72	62	60	60	66	55	53	53	53
5	82	71	63	57	70	57	67	56	66	55	53	53	60	50	48	48	48
6	76	64	57	51	64	51	62	50	60	50	48	48	56	45	43	43	43
7	71	59	51	46	58	46	57	45	56	45	43	43	51	41	39	39	39
8	67	54	47	41	54	41	53	41	51	41	39	39	48	37	36	36	36
9	63	50	43	38	50	38	49	38	48	37	36	36	44	34	33	33	33
10	59	47	40	35	46	35	45	35	44	34	33	33					

Adjustment factors

Finish
WH = 100%
BK = 57%

Downlight, Wide beam, 2900lm Engine, 94lm/W at 31W

Candela Curves



Frame: 6RN
Engine / Trim:
Z6RDL30935WOWWHZ10U

Output lumens: 2900 lms
Input watts¹: 30.8 W
CRI: 90 min
CCT²: 3500K
Beam Angle: 82°
Spacing Crit.: 1.14

Zonal summary

Zone	Lumens	%Luminaire
0-30	1181	40.7%
0-40	1816	62.6%
0-60	2609	90.0%
0-90	2900	100.0%

Angle	Mean CP	Lumens
0	1597	
5	1587	151
10	1557	
15	1506	424
20	1429	
25	1325	607
30	1188	
35	1021	635
40	838	
45	651	501
50	471	
55	319	292
60	217	
65	164	165
70	128	
75	92	98
80	58	
85	25	28
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	64	5.7'
6'	44	6.8'
7'	33	8.0'
8'	25	9.1'
9'	20	10.3'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	123.0	1.37
6'	81.0	0.90
7'	58.0	0.64
8'	48.0	0.53
9'	39.0	0.43

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 94.5 lm/w
Report³: STMR-675

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	100	100
1	111	107	103	100	105	99	101	96	97	93	88	88	87	80	77	77	77
2	103	96	90	85	94	84	91	83	87	81	77	77	79	70	67	67	67
3	95	86	79	74	85	73	82	72	79	71	68	68	72	63	60	60	60
4	88	78	71	65	77	64	74	64	72	63	60	60	66	56	54	54	54
5	82	71	63	57	70	57	68	57	66	56	54	54	61	50	48	48	48
6	77	65	57	51	64	51	62	51	61	50	48	48	56	46	44	44	44
7	72	60	52	46	59	46	57	46	56	46	44	44	52	42	40	40	40
8	67	55	47	42	54	42	53	42	52	42	40	40	48	38	36	36	36
9	63	51	43	38	50	38	49	38	48	38	36	36	44	34	33	33	33
10	59	47	40	35	47	35	46	35	45	35	33	33					

Adjustment factors

Finish
CD = 110%
WH = 100%
DB = 65%
BK = 65%

1. Wattage: controlled to within 5%
2. Correlated Color Temperature: within specs as defined in ANSI_NEMA_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
3. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.