USE ONLY WITH HALO L-640 SERIES TRACK SYSTEM ONLY

NOTE: Halo-2 connectors will fit only Halo-2 Power-Trac. All Halo-2 Power-Trac is shipped from the factory with a "Left" dead end installed.

The L-943 is shipped as an "L" but can be converted to a straight by removing the "L" L-943 cover and installing the straight cover.


This connector comes with a "Left" and "Right" side as denoted by the small arrows at the ends of the connector. The right end will fit directly into the open end of the track as shipped from the factory. The left end is installed by removing the left end cap from the track. A right end cap (supplied) must be installed if this connector will be a point for power feed.

Step 1. Insert the ends of the connector into the respective ends of the Power-Trac. Polarity arrow on connector must be on the same side as polarity groove of track sections (See Fig. 1). Secure by tightening screws at the tips of the connector until snug. Do not over tighten since this may distort the track.

NOTE: If used as power feed point follow this procedure.

sep 1. Remove plastic cover.

Step 2. Pull supply wires through the center and attach "hot" wires to unused terminals marked "1" and "2". Attach neutral wire to "NEUT" terminal. Finally, attach ground wire to green ground screw marked "GND"/" \(\displies \) "provided on back plate (See Fig. 2).

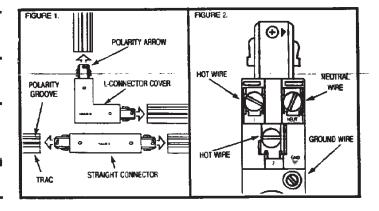

Step 3. Reinstall plastic cover.

