


1100IC Mounting Frame must be installed with the J-Box on the "UPHILL" side.

**1133/1100IC Series**  
Insulated Ceiling

1104ICX/N Mounting Frame must be installed with the J-Box on the "DOWNHILL" side.

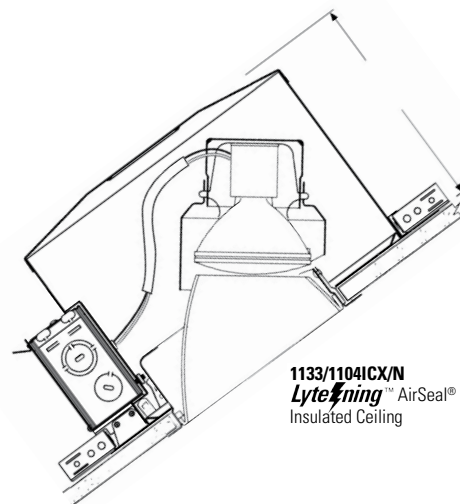

**1133/1104ICX/N**  
**Lytecaster™** AirSeal®  
Insulated Ceiling

Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Cat.No: \_\_\_\_\_  
Type: \_\_\_\_\_  
Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
	Frame-In Kit	Installation Type	Lamping	Height
<b>1133WH</b> Gloss White Step Baffle	<b>1100IC</b>	IC	75W PAR30 (Short Neck)	7 5/16"
	<b>1100AICM</b>	AirSeal® IC		7 5/16"
	<b>1104ICX/N</b>	AirSeal® IC		7 1/4"

## Features

- Housing:** Hydroformed aluminum, .040" thick; white trim flange.
- Aperture:** Conical aluminum step baffle, matte black or gloss white finish; or hydroformed aluminum cone, specular finish. For ceiling slopes 30° - 45° angle, 7/12 - 12/12 pitch. Baffle or cone must be removed for lamping.
- Lamp Housing:** Hydroformed aluminum, .040" thick; permits adjustment ±7° vertical for straight downlighting.
- Frame-In Kit:** See Frame-In Kit specification sheets for more details.

## Options & Accessories

**Extra Wide Flange Trim Ring:** 1954 - 8 5/8" O.D.

## Labels

UL (Suitable for Damp Locations), I.B.E.W.

# 1133 Lytecaster Reflector 6 3/4"

## Steep Slope Ceiling Trim


### Footcandles 2 1/2' Above the Floor

Fixture mounted on 5' x 5' centers (horizontally) in 15' x 30' room with sloped ceiling.

Room reflectances: 80% ceiling, 50% walls, 20% floor.

**A** = 75W PAR30 FL (Flood)

**B** = 75W PAR30 NFL (Narrow Flood)

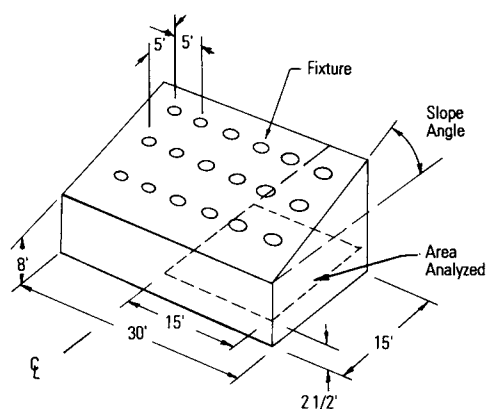


30' Ceiling Slope										
C										
	41	31	43	38	31					
A	47	41	A	35	39	A	27			
	40	31		42	38		31			
A	46	40	A	34	38	A	26			
	38	29		41	37		30			
A	44	37	A	31	35	A	22			

C										
	40	32	43	41	35					
A	47	41	A	35	40	B	33			
	40	31		42	41		35			
A	46	40	A	34	40	B	32			
	38	30		41	39		33			
A	44	37	A	31	36	B	28			

# 1133 Lytecaster Reflector 6 3/4"

## Steep Slope Ceiling Trim

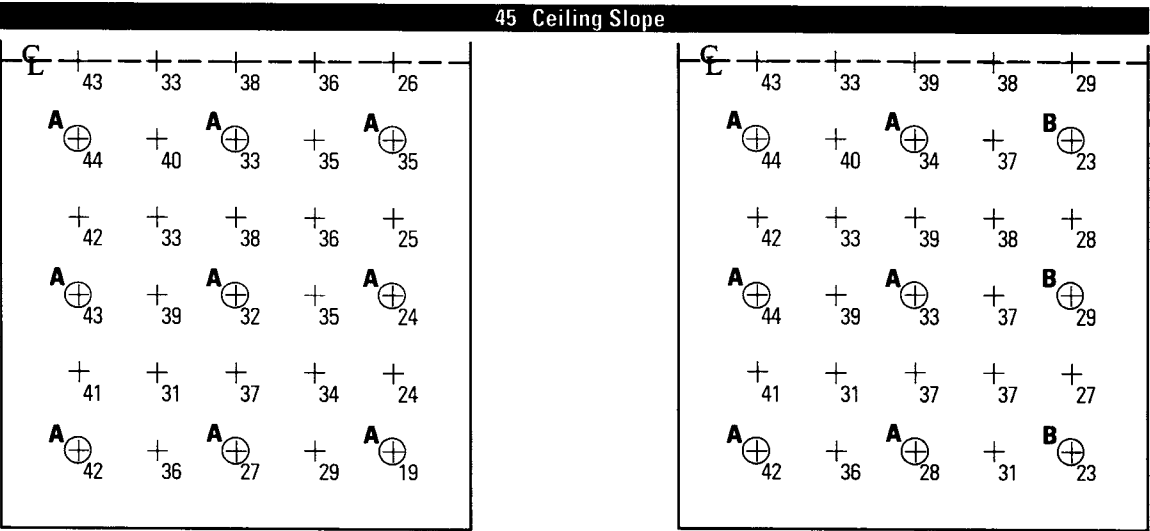

Data calculated with GENESYS using bare lamp photometrics. Fixture spacing exceeding 5' may cause lighting under lowest areas.

To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.



© 2020 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation  
200 Franklin Square Drive,  
Somerset, NJ 08873  
Telephone 855-486-2216

Signify Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C 2S3  
Telephone 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.